

**ELSEA**  
MADE IN ITALY

GENERAL CATALOGUE  
CATALOGO GENERALE

**2024**

DOWNLOAD 

CATALOGO  
GENERALE 2024





# INDICE INDEX

## ASPIRATORI

06	ESAT SLIM
08	ESAT
10	ESAT 30I
12	ESAT PLUS
14	ESAT PLUS EXTRA
16	ESAT 77
18	ESAT 77 MARKET
20	ESAT M77
22	ESAT B77
24	ESAT E77

## ASPIRATORI PROFESSIONALI

28	ARES WET & DRY
30	ARES FLY
32	ARES WHITE ROOMS
34	QUIET 3.0
36	QUIET JUNIOR 3.0
38	BIO WET & DRY
40	GREEN LINE
42	X15
44	X15B
46	MINI BEAT
48	ARES PLUS
50	ARES EXTRA
52	CENERVAC
54	ARES RECHARGE
56	EXEL
58	EXEL M
60	EXEL M CART
62	VERSO

64	EJECT
66	MAXIMUS
68	ARES PLUS OVEN-VERSO OVEN
70	ESTRO 110
72	ESTRO 125
74	ESTRO HOTWAVE 125
76	ESTRO 250-330
78	ESTRO HOTWAVE 250
80	ELECT 125
82	ELECT 125 M class
84	ELECT 125 H class
86	ELECT 250 N
88	ELECT 250 B
90	VIBRA 125 class
92	VIBRA 125 M class
94	BIG VIBRA 250 B

## ASPIRATORI INDUSTRIALE

98	XTOOL TOP
100	XTOOL SHAKE
102	XTOOL EL
104	XTOOL EASY
106	ALTAI
108	AURA
110	HEKA
112	MIZAR
114	TRANTOR
116	CHRONO
118	HAMIAANTUS 20
120	HAMIAANTUS 37

- 122 HAMIANTUS 50
- 124 HAMIANTUS 77
- 126 TITANUS P37
- 128 TITANUS P77
- 130 TITANUS
- 132 ANTARES
- 134 POWER LEAF
- 136 ERCULES
- 138 VEGA
- 140 LUXOR
- 142 LUXOR ATEX
- 144 ARGO SLIM
- 146 ARGO VERTICAL
- 148 ARGO
- 150 ARGO MAXIMUS
- 152 ADONE
- 154 ADONE MAX 4kW
- 156 ADONE MAX 12kW
- 158 HOT POSEIDON
- 160 HOT FOAM POSEIDON
- 162 AQUARIUS
- 164 CAR SEAT DRYER
- 166 SELF SERVICE SINGLEPHASE
- 168 SELF SERVICE THREEPHASE

## LINEA VAPORE

- 172 NANOSTEAM
- 174 VIROSTEAM
- 176 VIRODEC
- 178 STEAM WAVE
- 180 STEAM PLUS
- 182 STEAM PLUS OZONO
- 184 STEAM POSEIDON
- 186 STEAM MINI COMBINATA
- 188 STEAM COMBINATA

## LAVASCIUGA

- 192 ZLA 35
- 194 ZLA40
- 196 ZLA46T-ZLA52T-ZLA56T
- 198 ZLA66T ZLA80T
- 200 LAUB900
- 202 LAUB1000
- 204 LAUB1100



# ASPIRATORI



# ESAT SLIM

Due modelli polvere e liquidi. Leggero, maneggevole, serbatoio in polipropilene con un solo motore monostadio, il piccolo ed eco della gamma, ideale per la pulizia di spazi ridotti

Two different versions of Wet & Dry Vacuum Cleaners with a single stage motor. Light and manageable with polypropylene tank ESAT is ideal for cleaning of small spaces.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet

ESSLIM21

ESSLIM37

		ESSLIM21	ESSLIM37
Motors number	Numero motori	1	1
Stage	Stadi motori	single	single
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	By Pass	By Pass
P max (W)	P max (W)	1250	1250
P (W)	Potenza (W)	1100	1050
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1530	1530
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	258	258
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	21	37
Weight (Kg)	Peso (Kg)	9,3	10,3



### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose mt. 1,4 with handle Ø 36	ACTF036/1,4/C
2	Little nozzle Ø36	ACB0036
3	Crevice tool Ø36	ACL036
4	Plastic extension wand Ø 36	ACTP036
5	Plastic nozzle Ø36	ACSP2000
6	Slide-on brush for floor liquids nozzle	ACIM2000
7	Polyester filter with ring Ø34	FA034PP
8	Paper bag	FI003C for ESSELM21 FI004C for ESSELM37

### Options

	DESCRIPTION	CODE
9	Cartridge filter Ø175 - H140 HEPA	FI175140HL
10	Polyester bag	FI003PN for ESSELM21 FI004PN for ESSELM37
11	Sponge filter for liquids	ACCA165A
12	Nylon filter Ø334	FINY334AT
13	Dusting brush Ø36	ACPE036
14	Rotating brush PP 0,15	ACRO015
15	Floor turbo TB275 Ø36 ABS black	ACFT275
16	Hand turbo TB 155 Ø36 EP black	ACHT155



40 x 40 x 59 H cm



# ESAT

Aspira polvere e liquidi leggero, maneggevole, serbatoio in polipropilene con un solo motore monostadio, il piccolo ed eco della gamma, ideale per la pulizia di spazi ridotti

Wet & Dry Vacuum Cleaners with a single stage motor. Light and manageable with polypropilene tank ESAT is ideal for cleaning of small spaces.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet



## ES21P

Motors number	Numero motori	1
Stage	Stadi motori	single
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	By Pass
P max (W)	P max (W)	1250
P (W)	Potenza (W)	1100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1530
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	258
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	21
Weight (Kg)	Peso (Kg)	9,3



### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose mt. 1,4 with handle Ø 36	ACTF036/1,4/C
2	Little nozzle Ø36	ACB0036
3	Crevice tool Ø36	ACLP036
4	Plastic extension wand Ø 36	ACTP036
5	Plastic nozzle Ø36	ACSP2000
6	Slide-on brush for floor liquids nozzle	ACIM2000
7	Polyester filter with ring Ø34	FA034PP
8	Paper bag 20lt	FI003C

### Options

	DESCRIPTION	CODE
9	Cartridge filter Ø175 - H140 HEPA	FI175140HL
10	Polyester bag 20lt	FI003PN
11	Sponge filter for liquids	ACCA165A
12	Nylon filter Ø334	FINY334AT
13	Dusting brush Ø36	ACPE036
14	Rotating brush PP 0,15	ACRO015
15	Floor turbo TB275 Ø36 ABS black	ACFT275
16	Hand turbo TB 155 Ø36 EP black	ACHT155



40 x 40 x 59 H cm



# ESAT 30I

Modello polvere e liquidi con capacità del fusto di 30lt inox.

Wet & Dry Vacuum cleaner with a single stage motor with stainless steel 30 litres tank.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet



ES30I

Motors number	Numero motori	1
Stage	Stadi motori	single
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	By Pass
P max (W)	P max (W)	1250
P (W)	Potenza (W)	1100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1530
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	258
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	30
Weight (Kg)	Peso (Kg)	13,7



### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose mt. 1,4 with handle Ø 36	ACTF036/1,4/C
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Plastic extension wand Ø 36	ACTP036
5	Plastic nozzle Ø36	ACSP2000
6	Slide-on brush for floor liquids nozzle	ACIM2000
7	Polyester filter with ring Ø34	FA034PP
8	Paper bag 37lt	FI003C30

### Options

	DESCRIPTION	CODE
9	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C
10	Polyester bag 37lt	FI004PN
11	Sponge filter for liquids	ACCA165A
12	Nylon filter Ø334	FINY334AT
13	Dusting brush Ø36	ACPE036
14	Rotating brush PP 0,15	ACRO015
15	Floor turbo TB275 Ø36 ABS black	ACFT275
16	Hand turbo TB 155 Ø36 EP black	ACHT155



40 x 40 x 59 H cm



# ESAT PLUS

Modello polvere e liquidi con capacità del fusto di 37lt e fusto polipropilene o inox.

Wet & Dry Vacuum cleaner with a single stage motor. It is available with stainless steel or polypropylene 37 litres tank.



1 Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet



		ES37I	ES37P
Motors number	Numero motori	1	1
Stage	Stadi motori	single	single
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	By Pass	By Pass
P max (W)	P max (W)	1250	1250
P (W)	Potenza (W)	1100	1100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1530	1530
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	258	258
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37
Weight (Kg)	Peso (Kg)	13,7	12,6



### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose mt. 1,4 with handle Ø 36	ACTF036/1,4/C
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Plastic extension wand Ø 36	ACTP036
5	Plastic nozzle Ø36	ACSP2000
6	Slide-on brush for floor liquids nozzle	ACIM2000
7	Polyester filter with ring Ø34	FA034PP
8	Paper bag 37lt	FI004C

### Options

	DESCRIPTION	CODE
9	Cartridge filter Ø175 - H140 HEPA	FI175140HL
10	Polyester bag 37lt	FI004PN
11	Sponge filter for liquids	ACCA165A
12	Nylon filter Ø334	FINY334AT
13	Dusting brush Ø36	ACPE036
14	Rotating brush PP 0,15	ACRO015
15	Floor turbo TB275 Ø36 ABS black	ACFT275
16	Hand turbo TB 155 Ø36 EP black	ACHT155



40 x 40 x 59 H cm



# ESAT PLUS EXTRA

Modello polvere e liquidi con capacità del fusto di 50lt. un solo motore 1300W monostadio e fusto inox.

Wet & Dry Vacuum cleaner with a single stage motor. It is available with stainless steel 50 litres tank.



1 Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet



## ES50I

Motors number	Numero motori	1
Stage	Stadi motori	single
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	By Pass
P max (W)	P max (W)	1300
P (W)	Potenza (W)	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2100
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	210
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	50
Weight (Kg)	Peso (Kg)	13.7



## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-male Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø36	ACPE040
9	Polyester filter with ring Ø37	FA037P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 36/50lt	FI006C
12	Cartridge filter Ø175 - H140 HEPA	FI175140HL
13	Nylon filter Ø334	FINY334AT
14	Power head L350	ACES350
15	Slide-on for carpet nozzle L300	ACIT400
16	Metal Crevice tool Ø38	ACLP038CR



48 x 48 x 87 H cm



# ESAT 77

Aspirapolvere e liquidi. Disponibile con due o tre motori monostadio fino ad una potenza massima di 3300W, con fusto in polipropilene o inox da 77 lt di capacità. Ideale per la pulizia professionale.

Wet & Dry Vacuum cleaner provided with two or three single stage motors, reaching 3300W maximum power. Ideal for professional cleaning. It is available with stainless steel or polypropylene 77 litres tank.



Motori  
Motors



Motori  
Motors



D Polvere  
D Dry



W Acqua  
W Wet



		ES77P2 ES77I2	ES77P3 ES77I3	ES77P2S ES77I2S	ES77P3S ES77I3S
Motors number	Numero motori	2	3	2	3
Stage	Stadi motori	single	single	single	single
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass	by pass	by pass
P max (W)	P max (W)	2400	3300	2400	3300
P (W)	Potenza (W)	2050	2900	2050	2900
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2250	2250	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	340	510	340	510
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	70	71	70	71
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	21,2 / 23,0	24,5 / 26,5	23,0 / 25,0	24,5 26,5

ES77P3S  
ES77I3S  
ES77P2S  
ES77I2S




### Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A
11		

### Options

	DESCRIPTION	CODE
12	Paper bag 77lt Max 2mot	F1005C
13	Polyester bag 77lt Max 2mot	F1005P
14	Cartridge filter Ø250 - H178 HEPA	FI250178HL
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Metal Crevice tool Ø38	ACLP038CR

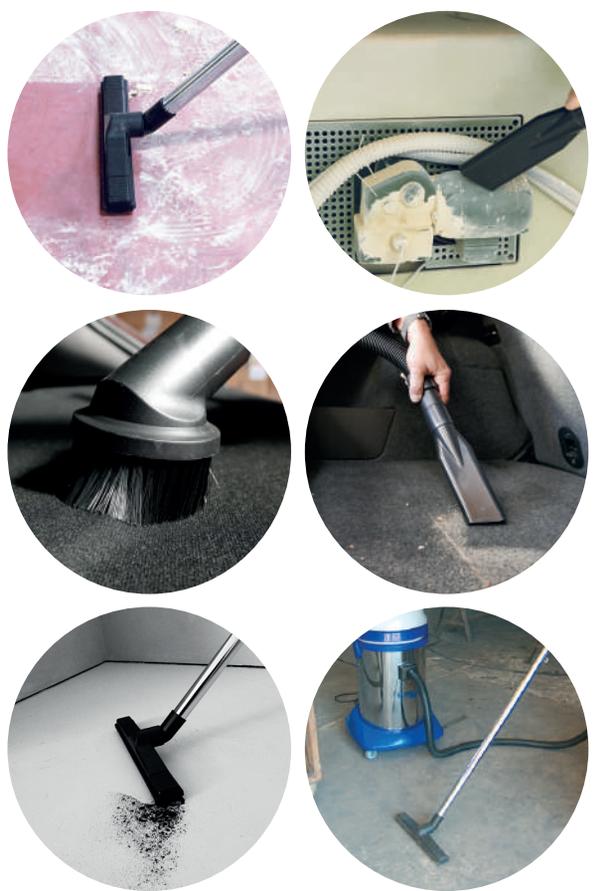

60 x 60 x 96 H cm



# ESAT 77 MARKET

Aspirapolvere e liquidi. Disponibile con due o tre motori mono-stadio fino ad una potenza massima di 3300W, con fusto in polipropilene o inox da 77 lt di capacità. Ideale per la pulizia professionale.

Wet & Dry Vacuum cleaner provided with two or three single stage motors, reachin 3300W maximum power. Ideal for profes-sional cleaning. It is avaiable with stainless steel or polypropyle-ne 77 litres tank.



2 Motori  
Motors



3 Motori  
Motors



D Polvere  
Dry



W Acqua  
Wet



		ES77P2M ES77I2M	ES77P3M ES77I3M	ES77P2MS ES77I2MS	ES77P3MS ES77I3MS
Motors number	Numero motori	2	3	2	3
Stage	Stadi motori	single	single	single	single
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass	by pass	by pass
P max (W)	P max (W)	2400	3300	2400	3300
P (W)	Potenza (W)	2050	2900	2050	2900
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2250	2250	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	340	510	340	510
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	68	67	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	21,2 / 23,0	23,0 / 25,0	21,2 / 23,0	23,0 / 25,0

ES77P2MS  
ES77I2MS  
ES77P3MS  
ES77I3MS



## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]


	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLPO40
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A
11		

## Options

	DESCRIPTION	CODE
12	Paper bag 77lt Max 2mot	FI005C
13	Polyester bag 77lt Max 2mot	FI005P
14	Cartridge filter Ø250 - H178 HEPA	FI250178HL
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Metal Crevice tool Ø38	ACLPO38CR



60 x 60 x 96 H cm



# ESAT M77

Aspirapolvere e liquidi. Disponibile con due o tre motori monostadio fino ad una potenza massima di 3300W, con fusto in polipropilene o inox da 77 lt di capacità. Ideale per la pulizia professionale.

Wet & Dry Vacuum cleaner provided with two or three single stage motors, reaching 3300W maximum power. Ideal for professional cleaning. It is available with stainless steel or polypropylene 77litres tank.



2 Motori  
Motors



3 Motori  
Motors



D Polvere  
Dry



W Acqua  
Wet



ES77MP2 ES77MP3  
ES77MI2 ES77MI3

Motors number	Numero motori	2	3
Stage	Stadi motori	single	single
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass
P max (W)	P max (W)	2400	3300
P (W)	Potenza (W)	2050	2900
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	340	510
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	70	71
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	22,2 / 24,0	24,0 / 26,0



## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLPO40
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A
11	Drainage kit Ø28	ACKI028

## Options

	DESCRIPTION	CODE
12	Paper bag 77lt Max 2mot	FI005C
13	Polyester bag 77lt Max 2mot	FI005P
14	Cartridge filter Ø250 - H178 HEPA	FI250178HL
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Metal Crevice tool Ø38	ACLPO38CR



60 x 60 x 96 H cm



# ESAT B77

Aspirapolvere e liquidi. Disponibile con due o tre motori mono-stadio fino ad una potenza massima di 3300W, con fusto in polipropilene o inox da 77 lt di capacità. Ideale per la pulizia professionale con l'aggiunta del carrello basculante e del manico per facilitare lo svuotamento.

Wet & Dry Vacuum cleaner provided with two or three single stage motors, reaching 3300W maximum power. Provided with tipping trolley for an easy emptying of dirty liquids. Ideal for professional cleaning. It is available with stainless steel or polypropylene 77 litres tank.



2  
Motori  
Motors



3  
Motori  
Motors



D Polvere  
D Dry



W Acqua  
W Wet



ES77BP2 ES77BP3  
ES77BI2 ES77BI3


Motors number	Numero motori	2	3
Stage	Stadi motori	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass
P max (W)	P max (W)	2600	3300
P (W)	Potenza (W)	2300	2900
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	510
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	70	71
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	24,2 / 27,0	27,0 / 28,0



## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A

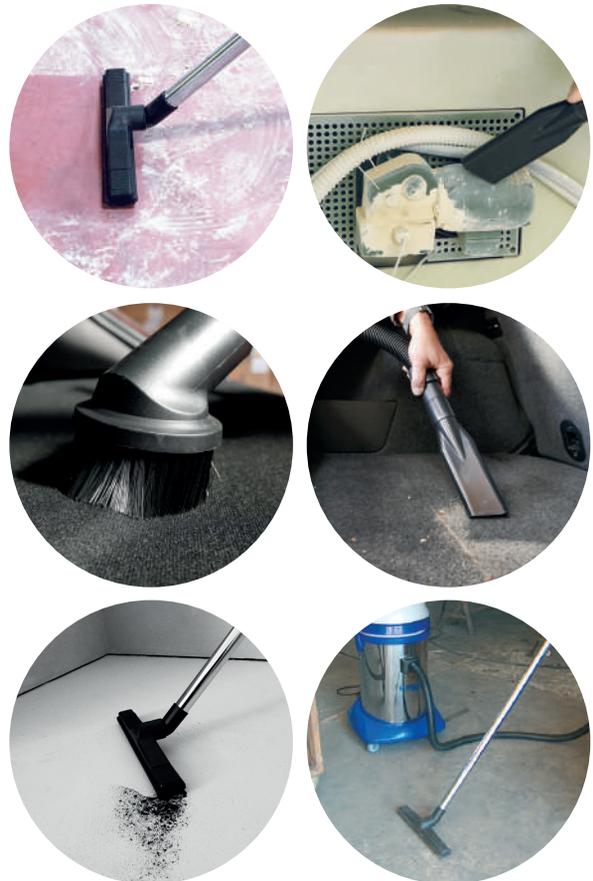

## Options

	DESCRIPTION	CODE
11	Drainage kit Ø28	ACKI028
12	Paper bag 77lt Max 2mot	FI005C
13	Polyester bag 77lt Max 2mot	FI005P
14	Cartridge filter Ø250 - H178 HEPA	FI250178HL
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Metal Crevice tool Ø38	ACLP038CR



60 x 60 x 96 H cm



# ESAT E77

Estrattori per tappeti, poltrone, pavimenti, ecc.), versione a due motori con serbatoio 20 lt e fusto basculante in polipropilene e inox. L'utilizzo è sempre associato alla contemporanea erogazione ed aspirazione di detergente (acqua o miscela di acqua e detergente idoneo).

Extractor with two or three double stage motors. It is indicated for the cleaning of carpet, armchair, moquette. This model is provided with the 20 litres detergent tank designed to be completely separated from residual liquids tank. It is available with stainless steel or polypropylene 77 litres tank and tipping trolley.



2  
Motori  
Motors



W Acqua  
W Wet



Lavamoquette  
Clean carpet  
& floor  
**vacuum**



V Pompa  
estrattore  
vibrazione  
V Solenoid  
pump



ES77EP2  
ES77EI2

Motors number	Numero motori	2
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	2600
P (W)	Potenza (W)	2300
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76
Capacity Pump (lt/min)	Portata pompa (lt/min)	0,8
Lift pump (bar)	Pressione pompa (bar)	2
Pump (W)	Pompa (W)	48
Detergent tank (lt)	Serbatoio detergente (lt)	20
Weight (kg)	Peso (kg)	25,5 / 27,5



## Standard Accessories and Filters

Kit: KITE040 [1-2]


	DESCRIPTION	CODE
1	Flexible hose+Hydrolitic tube complete mt.2,5 Ø40	ACTF038EN
2	Complete armchair nozzle	ACBL100PO/C
3	Sponge filter for liquids	ACCA165A
4	Anti-Foam Device	CGDA060

## Options

	DESCRIPTION	CODE
5	Polyester filter with ring Ø44	FA044P
6	Paper bag 77lt	FI005C
7	Polyester bag 77lt	FI005P
8	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
9	Nylon filter Ø440	FINY440AT
10	Complete carpet tool 1 jet	ACLA230/C
11	Accessory basket L450-Top	ACCE450VS
12	Drainage kit Ø28	ACKI028
13	Bag wet/Dry 77lt	FI7050TNT
14	Charging hose Ø18,5mm L 1,5m + funnel	ACTR185C



60 x 60 x 106 H cm





# ASPIRATORI PROFESSIONALI

ASPIRATORI PROFESSIONALI



# ARES WET&DRY

Macchina compatta professionale polvere e liquidi. Disponibile con motore bistadio e fusto polipropilene o inox da 21/23 lt. Ideale per la pulizia in spazi ridotti.

Compact and professional Wet&Dry Vacuum Cleaner with a double stage motor perfect to clean small spaces. It is available with stainless steel or polypropylene 21/23 litres tank.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet

ASPIRATORI PROFESSIONALI



AWP110  
AWI110

AWP125  
AWI125

Motors number	Numero motori	1	1
StageS	tadi motori	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamentob	y pass	by pass
P max (W)	P max (W)	1250	1400
P (W)	Potenza (W)	1100	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	1702	15
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	606	0
Total tank capacity (lt)	Capacità tot. fusto (lt)	21 / 23	21 / 23
Weight (Kg)	Peso (Kg)	9,2 / 10,1	9,2 / 10,1



## Standard Accessories and Filters

Kit: KIT036WN [1-2-3-4-5-6-7]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome extension wand Ø36	ACTC036
5	Steel Combined Nozzle Ø36	ACSP036
6	Liquid nozzle Ø36	ACSM036
7	Dusting brush Ø36	ACPE036
8	Polyester filter with ring Ø34	FA034PP
9	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
10	Paper bag 20lt	FI003C
11	Polyester bag 20lt	FI003PN
12	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C
13	Nylon filter Ø334	FINY334AT
14	Power head L350	ACES350
15	Rotating brush PP 0,15	ACRO015
16	Floor turbo TB275 Ø36 ABS black	ACFT275
17	Hand turbo TB Ø36 EP black	ACHT155
18	Power Socket	
19	Crevice tool Ø36 350mm	ACLP036/350



ASPIRATORI PROFESSIONALI



40 x 40 x 59 H cm



# ARES FLY

Macchina compatta professionale solo polvere con motore bistadio. Disponibile con fusto in polipropilene o inox da 21/23 lt. Ideale per la pulizia in spazi ridotti. Il modello FLY nasce per essere utilizzato negli aerei.

Compact and professional Dry Vacuum Cleaner with a double stage motor perfect to clean small spaces. It is available with stainless steel or polypropylene 21/23 litres tank. The FLY version has been studied to meet with the technical necessities of airplane cleaning.



Motore  
Motor

1



Polvere  
Dry

ASPIRATORI PROFESSIONALI



**FLDP100**  
**FLDI100**

Motors number	Numero motori	1
Stage	Stadi motoris	single
Volt (V)	Volt (V)	110
Frequency (Hz)	Frequenza (Hz)	400
Cooling	Tipo raffreddamento	Thru flow
P max (W)	P max (W)	1150
P (W)	Potenza (W)	1000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1350
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	220
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	58
Total tank capacity (lt)	Capacità tot. fusto (lt)	21 / 23
Weight (Kg)	Peso (Kg)	8,9 / 9,8



## Standard Accessories and Filters

Kit: KD036A [1-2-3-4-5-6]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Plastic extension wand Ø36	ACTP036
5	Steel combined nozzle Ø36	ACSP036
6	Dusting brush Ø36	ACPE036
7	Polyester filter with ring Ø34	FA034PP
8	Paper bag 20lt	FI003C

## Options

	DESCRIPTION	CODE
9	Polyester bag 20lt	FI003PN
10	Cartridge filter Ø175 - H140 HEPA	FI175140HL
11	Nylon filter Ø334	FINY334AT
12	Power head L350	ACES350
13	Rotating brush PP 0,15	ACRO015
14	Power Socket	
15	Crevice tool Ø36 350mm	ACLP036/350



ASPIRATORI PROFESSIONALI



40 x 40 x 59 Hcm



# ARES WHITE ROOMS

WHITE aspirapolvere per **camere bianche** con filtrazione massima fino a **0,3 µm**. Ideale per l'uso in ospedali, laboratori chimici/elettronici e in tutti i luoghi che necessitano di essere totalmente privi di contaminazione. WHITE è la macchina indispensabile per una perfetta "messa in bianco".

WHITE, Vacuum cleaner for **white rooms** with maximum filtration up to **0,3 µm**. It has been studied for hospitals, food industries, electronic / chemistry laboratories and all those places in which no contamination is admitted.



Motore  
Motor

1



D Polvere  
D Dry

ASPIRATORI PROFESSIONALI



WDP100  
WDI100

Motors number	Numero motori	1
Stage	Stadi motori	single
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	Thru flow
P max (W)	P max (W)	1150
P (W)	Potenza (W)	1000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1350
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	220
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	58
Total tank capacity (lt)	Capacità tot. fusto (lt)	21 / 23
Weight (Kg)	Peso (Kg)	9,3 / 9,5

FILTRATION



## Standard Accessories and Filters

Kit: KD036W [1-2-3-4-5-6]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACB0036
3	Crevice tool Ø36	ACLP036
4	Chrome extension wand Ø36	ACTC036
5	Steel combined nozzle Ø36	ACSP036
6	Dusting brush Ø36	ACPE036
7	Polyester filter with ring Ø34	FA034P
8	Polyester bag 20lt	FI003PN
9	HEPA Cartridge filter Ø175 - H140	FI175140H/LC

## Options

	DESCRIPTION	CODE
10	Paper bag 20lt	FI003C
11	Power head L350	ACES350
12	Power Socket	
13	Crevice tool Ø36 350mm	ACLP036/350



ASPIRATORI PROFESSIONALI



40 x 40 x 59 H cm



# QUIET 3.0

QUIET permette di pulire con estrema facilità qualsiasi superficie con una sorprendente silenziosità. L'aspiratore ha un commutatore che consente di lavorare a due diversi regimi: alta e bassa potenza. Inoltre, il modello è dotato di una spazzola combinata con ruote e di una spia di segnalazione per filtro sporco o sacco pieno.

QUIET: a model designed to guarantee extra comfort and versatility. This vacuum cleaner has a two speed switch which allows to work High or Low power: on Low the motor works at lower noise level. The accessories include a professional combined floor tool. This model is provided with a red warning light which switches on automatically when the filter is dirty or when the dust bag is full.



ASPIRATORI PROFESSIONALI



		QDP580	QDI580
Motors number	Numero motori	1	1
StageS	tadi motoris	ingle high speeds	ingle high speed
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	Thru flow	Thru flow
P max (W)	P max (W)	P max 650W	P max 650W
P (W)	Potenza (W)	P 580W	P 580W
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2100	2100
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	205	205
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	54	54
Total tank capacity (lt)	Capacità tot. fusto (lt)	21	21
Weight (Kg)	Peso (Kg)	12	12



## Standard Accessories and Filters

Kit: KD036Q [1-2-3-4-5-6-7]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome Extension Hose Ø36	ACTC036
5	Steel Combined Nozzle Ø36 with wheels	ACSP036RTH
6	Dusting brush Ø36	ACPE036
7	Accessories holder Ø36	CPPA003
8	Polyester filter with ring Ø34	FA034P
9	Paper bag 20lt	FI003C


## Options

	DESCRIPTION	CODE
10	Rotating brush PP 0,15	ACRO015
11	Floor turbo TB275 Ø36 ABS black	ACFT275
12	Hand turbo TB 155 Ø36 EP black	ACHT155
13	Crevice tool Ø36 350mm	ACLP036/350
14	HEPA Cartridge filter Ø175 - H140	FI175140HL/C
15	Mop holder	ACPI036RT
16	Mop	ACMO001MB



40 x 40 x 59 H cm

ASPIRATORI PROFESSIONALI

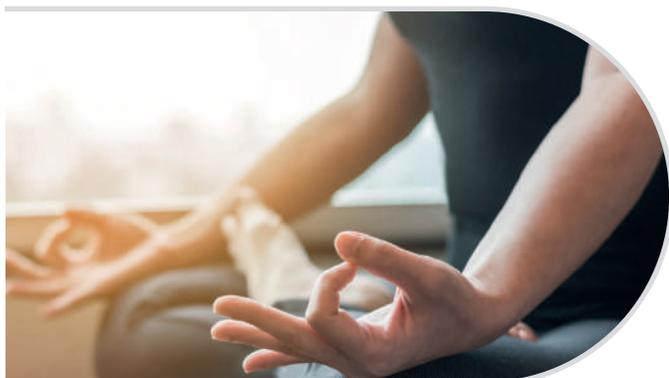

# QUIET JUNIOR 3.0

QUIET JUNIOR permette di pulire con estrema facilità qualsiasi superficie con una sorprendente silenziosità. L'aspiratore ha un commutatore che consente di lavorare a due diversi regimi: alta e bassa potenza. Inoltre, il modello è dotato di una spazzola combinata con ruote e di una spia di segnalazione per filtro sporco o sacco pieno.

QUIET JUNIOR an model designed to guarantee extra comfort and versatility. This vacuum cleaner has a two speed switch which allows to work High or Low power: on Low the motor works at lower noise level. The accessories include a professional combined floor tool. This model is provided with a red warning light which switches on automatically when the filter is dirty or when the dust.



Motore  
Motor

1



D Polvere  
D Dry

ASPIRATORI PROFESSIONALI



## QDI580J

Motors number	Numero motori	1
StageS	tadi motoris	single high speed
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	Thru flow
P max (W)	P max (W)	P max 650W
P (W)	Potenza (W)	P 580W
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2100
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	205
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	54
Total tank capacity (lt)	Capacità tot. fusto (lt)	13
Weight (Kg)	Peso (Kg)	12



## Standard Accessories and Filters

Kit: KD036Q [1-2-3-4-5-6-7]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLPO36
4	Chrome Extension Hose Ø36	ACTC036
5	Steel Combined Nozzle Ø36 with wheels	ACSP036RTH
6	Dusting brush Ø36	ACPE036
7	Accessories holder Ø36	CPPA003
8	Polyester filter with ring Ø34	FA034PPH8
9	Paper bag 20lt	FI002C

## Options

	DESCRIPTION	CODE
10	Rotating brush PP 0,15	ACRO015
11	Floor turbo TB275 Ø36 ABS black	ACFT275
12	Hand turbo TB 155 Ø36 EP black	ACHT155
13	Crevice tool Ø36 350mm	ACLPO36/350
14	Mop holder	ACPI036RT
15	Mop	ACMO001MB



40 x 40 x 59 H cm

ASPIRATORI PROFESSIONALI



# BIO WET&DRY

Macchina compatta professionale polifunzionale utilizzabile come aspira liquidi aspirapolvere con filtro ad acqua (3,5lt di H<sub>2</sub>O) oppure con filtro poliestere a cartuccia. Bio trattiene fino al 99,9% delle polveri contenute nell'aria. Ottimo antiacaro e umidificatore. Contenitore trasparente in plastica resistente da 21lt; motore by-pass con ottime prestazioni.

Professional compact multifunction equipment: BIO is a wet and dry vacuum cleaner with water filter (3,5lt of H<sub>2</sub>O) also provided with a polyester cartridge filter that allows to retain dust of air up to 99,9%. High performance by pass motor, see through 21lt polypropylene tank, anti-acarus, humidifier.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet

ASPIRATORI PROFESSIONALI



## BWP110

Motors number	Numero motori	1
Stage	Stadi motori	Single
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	1250
P (W)	Potenza (W)	1050
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1530
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	258
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	21
Weight (Kg)	Peso (Kg)	10,5




## Standard Accessories and Filters

Kit: KD036B [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome Extension wand Ø36	ACTC036
5	Steel Combined Nozzle Ø36	ACSP036
6	Liquid mozzle Ø36	ACSM036
7	Dusting brush Ø36	ACPE036
8	Accessories holder Ø36	CPPA003
9	Cartridge filter Ø253	FI225253P

## Options

	DESCRIPTION	CODE
10	Power head L350	ACES350
11	Rotating brush PP 0,15	ACRO015
12	Floor turbo TB275 Ø36 ABS black	ACFT275
13	Hand turbo TB 155 Ø36 EP black	ACHT155
14	Power Socket	
15	Crevice tool Ø36 350mm	ACLP036/350

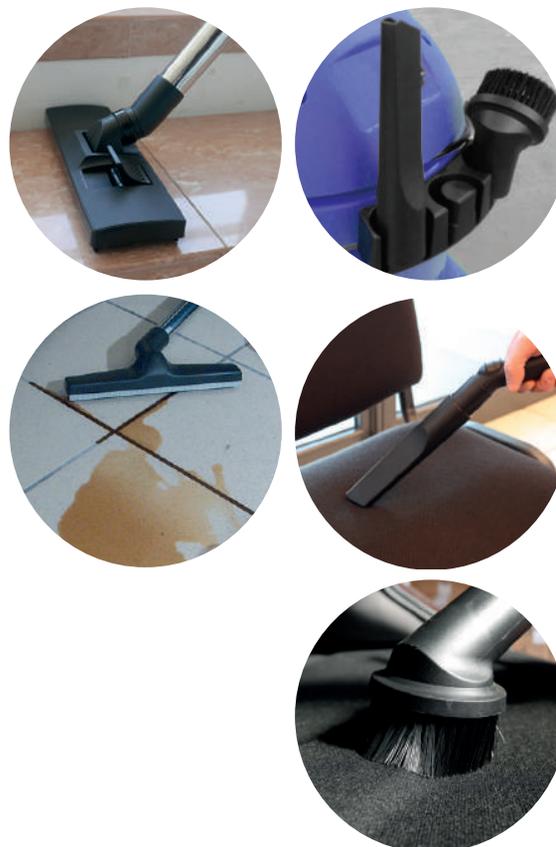

ASPIRATORI PROFESSIONALI



40 x 40 x 59 H cm



# GREEN LINE

“Green Line” ELSEA è una gamma di prodotti verdi dal punto di vista dei consumi. Linea di aspiratori in due versioni: Inox, con una capacità fusto da 13 e 23 litri, o Polipropilene, da 21 litri, “Green Line” ha un elevato rendimento in termini di prestazioni ed efficienza grazie ad un motore elettrico di nuova generazione che con appena 750W di potenza garantisce le stesse prestazioni di un motore di vecchia generazione da 1250W, con un risparmio energetico del 40%. I modelli “Green Line” GLI13, GLP21 e GLI23 sono silenziosi, robusti, compatti e dotati di accessori ergonomici, ruote antitraccia, porta accessori e parking.

Available with a 13/23 liters stainless steel capacity tank or with a 21 liters Polypropylene capacity tank, “GREEN LINE” delivers great performance in terms of efficiency and consumption, thanks to the use of a next generation 750W Pmax electric motor, which is able to grant the same performances of a 1250W motor, with less 40% of power consumption. The GLI13, GLP21 and GLI23 are silent, rugged and compact models equipped with ergonomic accessories, nonmarking wheels, accessories holder and parking.



Motore  
Motor

1



D Polvere  
D Dry



		GLI13G	LP21	GLI23
Motors number	Numero motori	1	1	1
Stage	Stadi motori	single	single	single
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	Thru flow	Thru flow	Thru flow
P max (W)	P max (W)	750	750	750
P (W)	Potenza (W)	700	700	700
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2150	2150	2150
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	190	190	190
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	54	54	54
Total tank capacity (lt)	Capacità tot. fusto (lt)	13	21	23
Weight (Kg)	Peso (Kg)	11	12	13
Tank	Fusto	Inox	PP	Inox



## Standard Accessories and Filters

Kit: KD036G [1-2-3-4-5-6-7]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Metal telescopic tube Ø36	ACTT036
5	Steel Combined Nozzle Ø36 with wheels	ACSP036RTH
6	Dusting brush Ø36	ACPE036
7	Accessories holder Ø36	CPPA003
8	Polyester filter with ring Ø34 H80,0mm	FA034PPH8
9	Paper bag 13lt	FI002C for GLI13
10	Paper bag 21lt	FI003C for GLI21 / 23

## Options

	DESCRIPTION	CODE
11	Rotating brush PP 0,15	ACRO015
12	Floor turbo TB275 Ø36 ABS black	ACFT275
13	Hand turbo TB 155 Ø36 EP black	ACHT155
14	Crevice tool Ø36 350mm	ACLP036/350
15	Mop holder	ACPI036RT
16	Mop	ACMO001MB



ASPIRATORI PROFESSIONALI



40 x 40 x 59 H cm



# X15

X15: ultimo nato in casa ELSEA. Aspirapolvere dal design innovativo e funzionale, per una macchina dalle alte prestazioni e dai ridotti consumi. Elevata forza aspirante, silenziosissimo, l'X15 garantisce performance di altissimo livello, nonostante la bassa potenza elettrica assorbita, che gli garantiscono la classificazione di CLASSE ENERGETICA A. Alta manovrabilità e facilità d'utilizzo grazie alle ridotte dimensioni e ad una presa ergonomica, che ne facilita lo spostamento. L'X15 è equipaggiato, inoltre, di un comodo sistema di start and stop a pedale, un regolatore di velocità motore e di un indicatore luminoso del sacco pieno.

X15: the last born in ELSEA. This vacuum cleaner combines an innovative and functional design with high performances and low consumption. Thanks to its powerful suction and to its really low noise level, the X15 guarantees very high performances. Moreover, the low electrical power absorption attests the X15 in A energy efficiency class. Handy and easy to use, this machine is provided with an ergonomic handle to facilitate the movement. The X15 is also equipped with a useful pedal start&stop system, with a motor speed regulator and with a light indicator when the dust-bag is full.


ASPIRATORI PROFESSIONALI



1 Motore  
Motor



D Polvere  
D Dry

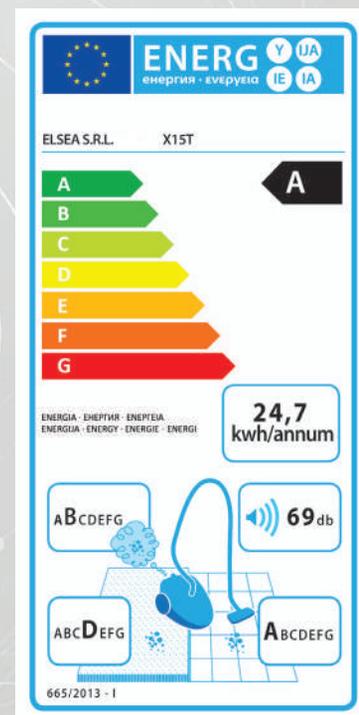

		X15	X15R	X15T
Motors number	Numero motori	1	1	1
Stage	Stadi motoris	Single	Single	Single
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	Thru flow	Thru flow	Thru flow
P max (W)	P max (W)	650	6506	50
P (W)	Potenza (W)	580	5805	80
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1900	1900	1900
Air flow (l/s)	Aria aspirata (l/s)	50	50	50
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	54	54	54
Total tank capacity (lt)	Capacità tot. fusto (lt)	11	11	11
Tank	Fusto	PP	PP	PP
Weight (Kg)	Peso (Kg)	7,7	7,7	7,7
Power cord length	Lunghezza Cavo	8,5mt	8,5mt	8,5mt
Potentiometer	Regolatore di potenza	NO/NO	SI/YES	SI/YES
Output plug	Presa accessoria	NO/NO	NO/NO	SI/YES



## Standard Accessories and Filters

Kit: KITX15 [1-2-3-4-5-6]

Kit: KITX15T [1-2-3-4-6-8]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,5 with handle ø36	ACTX036
2	Little nozzle ø36	ACB0036
3	Crevice tool ø36	ACLP036
4	Metal telescopic tube ø36	ACTT036
5	Steel combined nozzle ø36 with wheels	ACSPX036H for X15 and X15R
6	Dusting brush ø36	ACPE036
7	HEPA Bag filter	FIX15H
8	Combined nozzle ø36 TOP	ACSP010 for X15T

## Options

	DESCRIPTION	CODE
9	Bag filter - PAPER	FIX15
10	HEPA Cartridge filter	F128450H
11	Crevice tool Ø36 350mm	ACLP036/350
12	Mop holder	ACPI036RT
13	Mop	ACMO001MB



X15T  
X15R

ASPIRATORI PROFESSIONALI



52 x 40 x 47 H cm



# X15B

X15B: ultimo nato in casa ELSEA. Aspirapolvere con batteria a litio 36Vdc senza cavo, dal design innovativo e funzionale. Elevata forza aspirante, silenziosissimo, l'X15B garantisce performance di altissimo livello. Alta manovrabilità e facilità d'utilizzo grazie alle ridotte dimensioni e ad una presa ergonomica, che ne facilita lo spostamento. L'X15B è equipaggiato, inoltre, di un comodo sistema di start and stop a pedale.

X15B: the last born in ELSEA. This cordless vacuum cleaner with lithium battery 36Vdc combines an innovative and functional design. Thanks to its powerful suction and to its really low noise level, the X15B guarantees very high performances. Handy and easy to use, this machine is provided with an ergonomic handle to facilitate the movement. The X15B is also equipped with a useful pedal start&stop system.



1 Motore  
Motor



D Polvere  
D Dry



## X15B

Motors number	Numero motori	1
Stage	Stadi motori	single
Volt (V)	Volt (V)	36Vdc
Cooling	Tipo raffreddamento	Thru flow
P max (W)	P max (W)	300
P (W)	Potenza (W)	250
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1500
Air flow (l/s)	Aria aspirata (l/s)	30
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	52
Total tank capacity (lt)	Capacità tot. fusto (lt)	11
Tank	Fusto	PP
Recharge Time	Tempo di ricarica	2h
Working Autonomy	Autonomia	45'
Weight (Kg)	Peso (Kg)	8,7 whit battery



## Standard Accessories and Filters

Kit: KITX15 [1-2-3-4-5-6]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,5 with handle ø36	ACTX036
2	Little nozzle ø36	ACB0036
3	Crevice tool ø36	ACLP036
4	Metal telescopic tube ø36	ACTT036
5	Steel combined nozzle ø36 with wheels	ACSPX036H
6	Dusting brush ø36	ACPE036
7	HEPA bag filter	FIX15H
8	Li-ion battery 36 Vdc	CEBA036/29ELI-ION
9	Battery charger	CECC036/3ALI-ION

## Options

	DESCRIPTION	CODE
10	Bag filter - PAPER	FIX15
11	HEPA Cartridge filter	FI28450H
12	Crevice tool Ø36 350mm	ACLP036/350
13	Mop holder	ACPI036RT
14	Mop	ACM0001MB



ASPIRATORI PROFESSIONALI



52 x 40 x 47 H cm



# MINI BEAT

MINI BEAT: macchina compatta professionale POLVERE E LIQUIDI. Disponibile con motore bistadio e fusto plastica o inox da 21/23 lt. Con vibratore automatico ad azionamento manuale per la pulizia rapida ed efficace del filtro.

MINI BEAT compact and professional WET&DRY vacuum cleaner with a double stage motor and with stainless steel or polypropylene 21/23 litres tank. This machine is equipped with an automatic filter shaker manual device for an effective filter cleaning.

ASPIRATORI PROFESSIONALI



1 Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet



Filtro autopulente  
Intelligent cleaning  
filter



		VWP110 VWI110	VWP125 VWI125
Motors number	Numero motori	1	1
Stage	Stadi motori	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass
P max (W)	P max (W)	1250	1400
P (W)	Potenza (W)	1100	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	170	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	21 / 23	21 / 23
Weight (Kg)	Peso (Kg)	9,2 / 10,1	9,2 / 10,1



## Standard Accessories and Filters

Kit: KITW036N [1-2-3-4-5-6-7]

	DESCRIPTION	CODE
1	Flexible hose mt. 2,0 with handle Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome extension wand Ø36	ACTC036
5	Steel combined nozzle Ø36	ACSP036
6	Liquid nozzle Ø36	ACSM036
7	Dusting brush Ø36	ACPE036
8	Polyester filter with ring Ø34	FA034PP
9	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
10	Paper bag 20lt	FI003C
11	Polyester bag 20lt	FI003PN
12	Nylon filter Ø334	FINY334AT
13	Crevice tool Ø36 350mm	ACLP036/350



ASPIRATORI PROFESSIONALI



40 x 40 x 59 H cm



# ARES PLUS

Modello polvere e liquidi con capacità del fusto di 37 lt. Un solo motore bistadio e fusto polipropilene o inox.

Wet&Dry Vacuum Cleaner with a double stage motor. It is available with stainless steel or polypropylene 37 litres tank.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet

ASPIRATORI PROFESSIONALI



		AWP110P AWI110P	AWP125P AWI125P
Motors number	Numero motori	1	1
Stage	Stadi motori	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass
P max (W)	P max (W)	1250	1400
P (W)	Potenza (W)	1100	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	170	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37
Weight (Kg)	Peso (Kg)	12,6 / 13,7	12,6 / 13,7

ALSO AVAILABLE IN CLASS




## Standard Accessories and Filters

Kit: KITWIO40PLN [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-male Ø40	ACTC038C
5	Nozzle body A/P L300 Ø40	ACCS300A/P
6	Slide-on for liquids nozzle L300	ACIL300
7	Slide-on brush for floor nozzle L300	ACIP300
8	Dusting brush Ø36	ACPE040
9	Polyester filter with ring Ø34	FA034P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 36lt	FI004C
12	Polyester bag 36lt	FI004P
13	Cartridge filter Ø175 - H140 HEPA	FI175140HL /C
14	Nylon filter Ø334	FINY334AT
15	Power head L350	ACES350
16	Slide-on for carpet nozzle L300	ACIT300
17	Complete Handle Ø25 Black Tank 36lt	CMMA025/36C
18	Accessory basket L460	ACCE460
19	Power Socket	
20	Metal Crevice tool Ø38	ACLP038CR
21	Crevice tool car wash	ACLP040CW

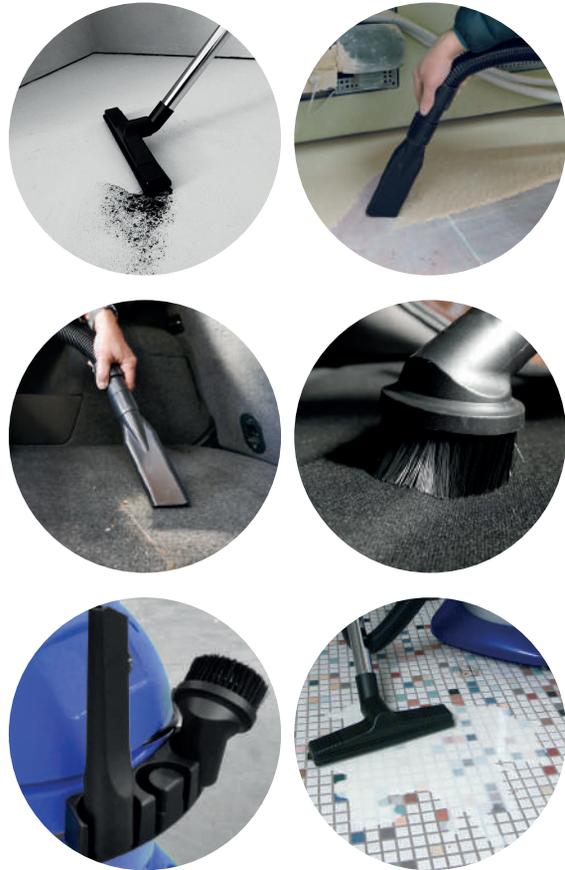

ASPIRATORI PROFESSIONALI



40 x 40 x 77 H cm



# ARES EXTRA

Modello polvere e liquidi con capacità del fusto di 50 lt. Un solo motore 1700W bistadio e fusto polipropilene o inox.

Wet&Dry Vacuum Cleaner with a double stage motor 1700W. It is available with stainless steel 50 litres tank.



1 Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet

ASPIRATORI PROFESSIONALI



## AFWI17550

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	1700
P (W)	Potenza (W)	1500
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2600
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	230
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	50
Weight (Kg)	Peso (Kg)	13,7

ALSO AVAILABLE IN CLASS



## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-male Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø36	ACPE040
9	Polyester filter with ring Ø37	FA037P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 36/50lt	FI006C
12	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C
13	Nylon filter Ø334	FINY334AT
14	Power head L350	ACES350
15	Slide-on for carpet nozzle L300	ACIT400
16	Metal Crevice tool Ø38	ACLP038CR



ASPIRATORI PROFESSIONALI



48 x 48 x 87 H cm



# CENERVAC

CENERVAC è la risposta professionale di ELSEA ad una specifica esigenza del settore della panificazione: la pulizia di forni dai residui/ceneri incombuste. Dotato di fusto INOX 37 lt e di un motore bistadio da 1400W ad elevata prestazione, CENERVAC è disponibile nella versione con SCUOTIFILTRO per una maggiore efficienza di lavoro.

CENERVAC is the ELSEA professional response to a specific market requirement of the baking sector: the cleaning of ovens/fireplaces from unburnt residues/ashes. Equipped with a 37 lt Stainless steel tanks and a 1400W double stage motor with high performance, CENERVAC is available with a FILTER SHAKER for a greater working efficiency.



Motore  
Motor

1



D Polvere  
D Dry



Filtro autopulente  
Intelligent cleaning  
filter



ASPIRATORI PROFESSIONALI

## ASDI125V

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	y pass
P max (W)	P max (W)	1400
P (W)	Potenza (W)	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37 lt
Weight (Kg)	Peso (Kg)	13,7



## Standard Filter

	DESCRIPTION	CODE
1	Conic HEPA cartridge filter Ø202 - H170	FI202170HL

## Options

Kit: KD036A

	DESCRIPTION	CODE
2	Flexible hose mt.2,0 with handle Ø36	ACTF036/2/CIN
3	Little nozzle Ø36	ACBO036
4	Crevice tool Ø36	ACLP036
5	Plastic extension wand Ø36	ACTP036
6	Steel combined nozzle Ø36	ACSP036
7	Dusting brush Ø36	ACPE036

## Options

Kit: KITV040N

	DESCRIPTION	CODE
8	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
9	Crevice tool Ø40	ACLP040
10	Chrome extension wand Ø40	ACTC038D
11	Chrome curved extension wand-male Ø40	ACTC038C
12	Nozzle body A/P L300 Ø40	ACCS300A/P
13	Slide-on brush for floor nozzle L300	ACIP300
14	Dusting brush Ø40	ACPE040

## Options

Kit: KIT038FSMCN

	DESCRIPTION	CODE
15	Flexible hose in steel and ceramic with couplings Ø36 2,5m	ACTF036OV
16	Straight aluminum wand with half protection L1,0 mt	ACTA038DSAN
17	Oven brush with teflon L400mm	ACCV400FMN

## Options

Kit: KIT038FA

	DESCRIPTION	CODE
18	Flexible hose in steel and ceramic with couplings Ø36 L1,0 mt	ACTF036M1N
19	Short metal hose Ø38	ACTR036



ASPIRATORI PROFESSIONALI



40 x 40 x 89 H cm



# ARES RECHARGE

ARES RECHARGE aspiratore polvere e liquidi dotato di un motore 24Volt e batterie per l'utilizzo senza cavo elettrico. La macchina ha una autonomia di lavoro che supera i 90 minuti con ottime prestazioni in aspirazione. Fusto 21 lt in acciaio inox, carrello principale robusto e maneggevole con cestello portaccessori e ruota anteriore girevole. L'aspiratore è dotato di vano porta batterie con ruote.

ARES RECHARGE is a BATTERY wet and dry vacuum cleaner equipped with a 24Volt motor with an operating time for up to 90 minutes, for great performances in terms of suction. 21 Lt Stainless steel tank with a robust and handy trolley equipped with front swivel wheels and accessories holder. The unit includes a compartment for batteries with wheels.



1 Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet

ASPIRATORI PROFESSIONALI



AWI50024

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	24Vdc
Frequency (Hz)	Frequenza (Hz)	c.c
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	550
P (W)	Potenza (W)	460
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	120
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	54
Total tank capacity (lt)	Capacità tot. fusto (lt)	23lt
Weight (Kg)	Peso (Kg)	34
Tank	Fusto	inox
Working Autonomy	Autonomia	1h30'
Recharge Time	Tempo di ricarica	6h



## Standard Accessories and Filters

Kit: KITW036N [1-2-3-4-5-6-7]

	DESCRIPTION	CODE
1	Flexible hose mt.3,0 with handle Ø36	ACTF036/3/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome extension wand Ø36	ACTC036
5	Steel combined nozzle Ø36	ACSP036RT
6	Liquid nozzle Ø36	ACSM036
7	Dusting brush Ø36	ACPE036
8	Polyester filter with ring Ø34	FA034PP
9	Sponge filter for liquids	ACCA165A
10	Gel Battery 35A/h 12V	CEBA012/35
11	Charger 24V 3A	CECC024/3A

## Options

	DESCRIPTION	CODE
12	Paper bag 20lt	FI003C
13	Polyester bag 20lt	FI003PN
14	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C



ASPIRATORI PROFESSIONALI



60 x 60 x 96 H cm



# EXEL

Aspirapolvere e liquidi. Disponibile con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76 lt di capacità. Ideale per la pulizia professionale.

Wet&Dry Vacuum Cleaner provided with one, two or three double stage motors, reaching 3600W maximum power. Ideal for professional cleaning. It is available with stainless steel or polypropylene 76 litres tank.

ALSO AVAILABLE IN CLASS



ASPIRATORI PROFESSIONALI



1 Motore  
Motor



2 Motori  
Motors



3 Motori  
Motors



D Polvere  
D Dry



W Acqua  
W Wet



		EXWP125 EXWI125	EXWP220 EXWI220	EXWP250 EXWI250	EXWP330 EXWI330	EXWP375 EXWI375
Motors number	Numero motori	1	2	2	3	3
Stage	Stadi motori	double	double	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass				
P max (W)	P max (W)	1400	2400	2600	3300	3600
P (W)	Potenza (W)	1200	2050	2300	2900	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2250	2400	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	340	430	510	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	65	67	67	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	19,0 / 21,0	21,2 / 23,0	21,2 / 23,0	23,0 / 25,0	23,0 / 25,0




## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 77lt Max 2mot	FI005C
12	Polyester bag 77lt Max 2mot	FI005P
13	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
14	Drainage kit Ø28	ACKI028
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Metal Crevice tool Ø38	ACLP038CR
18	Crevice tool car wash	ACLP040CW

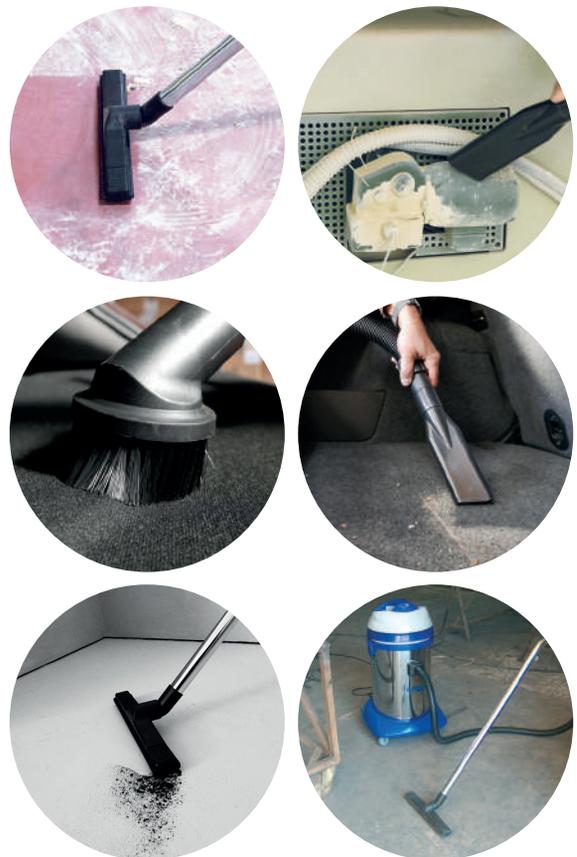

ASPIRATORI PROFESSIONALI



60 x 60 x 96 H cm




# EXEL M

Aspirapolvere e liquidi. Disponibile con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76 lt di capacità e manico per facilitare la manovrabilità. Ideale per la pulizia professionale.

Wet&Dry Vacuum Cleaner with one, two or three double stage motors, Reaching 3600W maximum power and provided with a practical handle. Available with stainless steel or polypropylene 76 litres tank, this model is ideal for professional cleaning.

ALSO AVAILABLE IN CLASS



1 Motore  
Motor



2 Motori  
Motors



3 Motori  
Motors



D Polvere  
Dry



W Acqua  
Wet

ASPIRATORI PROFESSIONALI



		EXWP125M EXWI125M	EXWP220M EXWI220M	EXWP250M EXWI250M	EXWP330M EXWI330M	EXWP375M EXWI375M
Motors number	Numero motori	1	2	2	3	3
Stage	Stadi motori	double	double	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass				
P max (W)	P max (W)	1400	2400	2600	3300	3600
P (W)	Potenza (W)	1200	2050	2300	2900	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2250	2400	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	340	430	510	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	65	67	67	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	20,0 / 22,0	22,2 / 24,0	22,4 / 24,0	24,0 / 25,0	24,0 / 25,0




## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 77lt Max 2mot	FI005C
12	Polyester bag 77lt Max 2mot	FI005P
13	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
14	Drainage kit Ø28	ACKI028
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Accessory basket L450 Exel - Bottom	ACCE450E
18	Accessory basket L450 Exel - Top	ACCE450ES
19	Metal Crevice tool Ø38	ACLPO38CR
20	Crevice tool car wash	ACLPO40CW

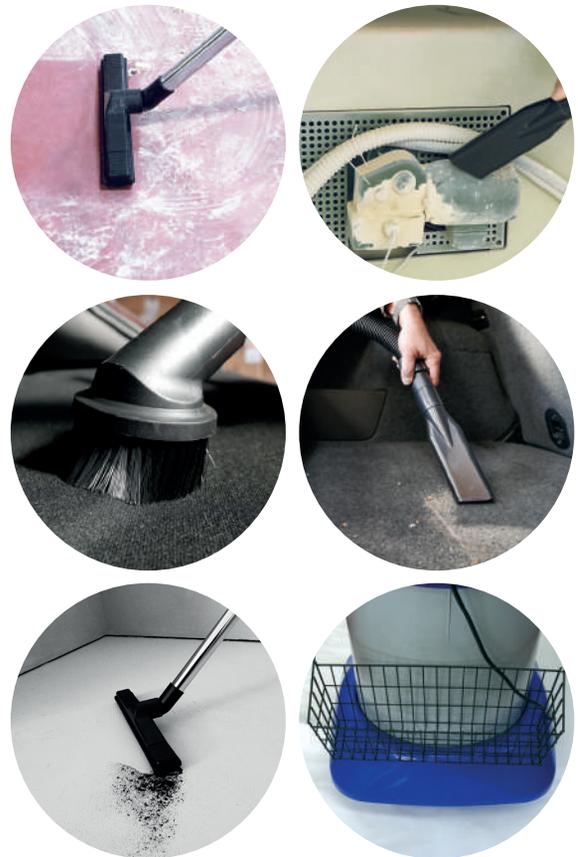

60 x 60 x 96 H cm



# EXEL M CART

Aspirapolvere e liquidi. Disponibile con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76 lt di capacità e manico per facilitare la manovrabilità. Ideale per la pulizia professionale.

Wet&Dry Vacuum Cleaner with one, two or three double stage motors, Reaching 3600W maximum power and provided with a practical handle. Available with stainless steel or polypropylene 76 litres tank, this model is ideal for professional cleaning.

ALSO AVAILABLE IN CLASS



ASPIRATORI PROFESSIONALI



1 Motore  
Motor



2 Motori  
Motors



3 Motori  
Motors



D Polvere  
D Dry



W Acqua  
W Wet



		EXWP125MC EXWI125MC	EXWP220MC EXWI220MC	EXWP250MC EXWI250MC	EXWP330MC EXWI330MC	EXWP375MC EXWI375MC
Motors number	Numero motori	1	2	2	3	3
Stage	Stadi motori	double	double	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass				
P max (W)	P max (W)	1400	2400	2600	3300	3600
P (W)	Potenza (W)	1200	2050	2300	2900	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2250	2400	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	340	430	510	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	65	67	67	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	20,0 / 22,0	22,2 / 24,0	22,4 / 24,0	24,0 / 25,0	24,0 / 25,0


## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 77lt Max 2mot	FI005C
12	Polyester bag 77lt Max 2mot	FI005P
13	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
14	Drainage kit Ø28	ACKI028
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Accessory basket L450 Exel - Bottom	ACCE450E
18	Accessory basket L450 Exel - Top	ACCE450ES
19	Metal Crevice tool Ø38	ACLP038CR
20	Crevice tool car wash	ACLP040CW

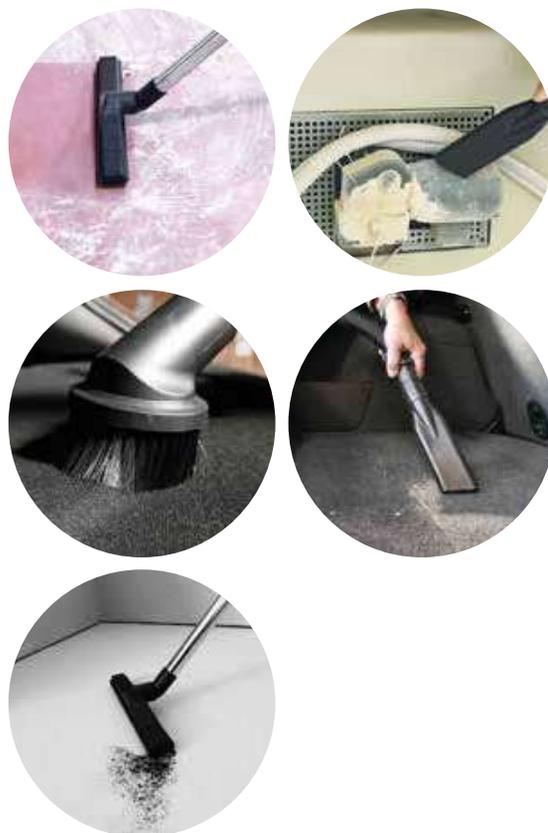

ASPIRATORI PROFESSIONALI



60 x 60 x 96 H cm



# VERSO

Aspirapolvere e liquidi con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76 lt di capacità. Ideale per la pulizia professionale, dotato del carrello basculante e del manico per facilitare lo svuotamento specie dei liquidi.

Wet&Dry Vacuum Cleaner with one, two or three double stage motors till reaching 3600W maximum power. Provided with tipping trolley for an easy emptying of dirty liquids this model is ideal for professional cleaning. Available with stainless steel or polypropilene 76 litres tank cleaning.

ASPIRATORI PROFESSIONALI



Motore  
Motor

1



Motori  
Motors

2



Motori  
Motors

3



D Polvere  
D Dry



W Acqua  
W Wet

ALSO AVAILABLE IN CLASS



		VEWP125 VEWI125	VEWP220 VEWI220	VEWP250 VEWI250	VEWP330 VEWI330	VEWP375 VEWI375
Motors number	Numero motori	1	2	2	3	3
Stage	Stadi motori	double	double	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass				
P max (W)	P max (W)	1400	2400	2600	3300	3600
P (W)	Potenza (W)	1200	2050	2300	2900	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2250	2400	2250	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	340	430	510	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	65	67	67	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	23,0 / 25,0	25,0 / 27,0	25,0 / 27,0	27,1 / 29,0	27,1 / 29,0



## Standard Accessories and Filters

Kit: KITW040N [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on for liquids nozzle L400	ACIL400
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Polyester filter with ring Ø44	FA044P
10	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
11	Paper bag 77lt Max 2mot	FI005C
12	Polyester bag 77lt Max 2mot	FI005P
13	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
14	Drainage kit Ø28	ACKI028
15	Nylon filter Ø440	FINY440AT
16	Slide-on for carpet nozzle L400	ACIT400
17	Accessory basket L460 Verso-Bottom	ACCE460
18	Accessory basket L450 Verso-Top	ACCE450VS
19	Complete squeegee tool with foot bracket	ACVF060P/CN
20	S/Steel Spacer with holes Ø440 250mm	CMDI4402F/C
21	Metal Crevice tool Ø38	ACLP038CR
22	Crevice tool car wash	ACLP040CW



60 x 60 x 106 H cm



ASPIRATORI PROFESSIONALI



# EJECT

Aspiraliquidi con due motori bistadio ed una pompa immersa integrata all'interno del fusto da 76 lt. Creato per esigenze di aspirazione di liquidi su ampie superfici ed espulsione a distanza. Ideale per risolvere pulizie di cantine, sanificazione fondi di cisterne e problemi di allagamenti in genere.

Wet Vacuum Cleaner provided with two double stage motors and a fully integrated submersible pump inside a 76 litres tank and tipping trolley. Studied for the suction of liquids and distance ejection, this model is fit for cellar cleaning, emptying of cisterns and drainage of any kind of flooding.



2  
Motori  
Motors



W Acqua  
W Wet

ASPIRATORI PROFESSIONALI

POMPA  
SOMMERSA



## EJWI220

Motors number	Numero motori	2
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	2400
P (W)	P (W)	2050
Portatata pompa (lt/min)	Capacity Pump (lt/min)	125
P pompa (W)	P pump (W)	300
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	340
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	76
Weight (Kg)	Peso (Kg)	29



## Standard Accessories and Filters

Kit: KITEJ040N [1-2-3-4-5]

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Chrome extension wand Ø40	ACTC038D
3	Chrome curved extension wand-male Ø40	ACTC038C
4	Nozzle body A/P L400 Ø40	ACCS400A/P
5	Slide-on for liquids nozzle L400	ACIL400
6	Accessory basket L460 Verso - Bottom	ACCE460
7	Sponge filter for liquids	ACCA165A

## Options

	DESCRIPTION	CODE
8	Crevice tool Ø40	ACLP040
9	Dustin brush Ø40	ACPE040
10	Slide-on brush for floor nozzle L400	ACIP400
11	Polyester filter with ring/with basket Ø44	FA044P/C
12	Paper bag 77lt Max 2mot	FI005C
13	Polyester bag 77lt Max 2mot	FI005P
14	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
15	Drainage kit Ø28	ACKI028
16	Nylon filter Ø440	FINY440AT
17	Slide-on for carpet nozzle L400	ACIT400
18	Complete squeegee tool with foot bracket	ACVF060P/CN
19	Dirty water basket for Eject - inox	CMCE077I



ASPIRATORI PROFESSIONALI



60 x 60 x 106 H cm



# MAXIMUS

MAXIMUS l'aspirazione di materiali particolari quali i trucioli di metallo, residui di legno e vetro, nonché oli, lubrificanti e scarti di produzione meccanica. Il filtro di aspirazione ad elevata superficie filtrante è protetto dall'urto diretto dei materiali per mezzo di una barriera che favorisce l'effetto ciclone.

MAXIMUS allows a comfortable suction of metal swarfs, wood tailings, debris, pieces of glass, exhausted oil, lubricants and any other kind of waste deriving from mechanical manufacturing. The cartridge filter has a high filtration capacity and efficiency. It is protected by a metal cone against direct impact of all kinds of debris creating the so called "cyclone effect".



**Motors**  
Motors



**D Polvere**  
**D Dry**



**W Acqua**  
**W Wet**



**Usò industriale**  
**Industrial use**

ASPIRATORI PROFESSIONALI

**ALSO AVAILABLE  
PP TANK**  
(VEWP375T - VEWP375TP)



		VEWI375T VEWI375TP	VEWP375T VEWP375TP
Motors number	Numero motori	3	3
Stage	Stadi motori	Double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass
P max (W)	P max (W)	3600	3600
P (W)	Potenza (W)	3150	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	76	76
Weight (Kg)	Peso (Kg)	29,8	30,2



## Standard Accessories and Filters for VEVI375T/ VEWP375T

Kit: KITVEVI375TN [1-2-3-4-5-6-7-8]

DESCRIPTION	CODE
1 Complete flexible hose mt.2,5 Ø50	ACTF50CN
2 Crevice tool Ø50	ACLP050
3 Chrome curved extension wand Ø50	ACTS050
4 Triangle Nozzle Ø50	ACBO050T
5 Nozzle body A/P LA00 Ø50	ACCS40050DAV
6 Slide-on for liquids nozzle L400	ACIL400DAV
7 Slide-on brush for floor nozzle L400	ACIP400DAV
8 Dusting brush Ø50	ACPE050
9 Polyester Cartridge filter Ø250 - H178	FI250178P
10 Sponge filter for liquids	ACCA165A
20 Cyclon Ø300	CMCI300N

## Standard Accessories and Filters for VEVI375TP/ VEWP375TP

Kit: KITVEVI375TPN [11-12-13-14-15-16]

DESCRIPTION	CODE
11 Antistatic flexible hose complete mt 2,5 Ø50	ACTF50PUCN
12 Antistatic conic crevice tool Ø50	ACLC050A
13 Antistatic corrugated squeegee Ø50	ACVO050A
14 Antistatic conic accessory Ø50	ACTC050A
15 Zinc plated crevice tool L500mm Ø50	ACLA050Z
16 Zinc plated coupling for accessories Ø50	ACMG050Z
9 Polyester Cartridge filter Ø250 - H178	FI250178P
10 Sponge filter for liquids	ACCA165A
20 Cyclon Ø300	CMCI300N

## Options

DESCRIPTION	CODE
17 Shavings/oil separator for Maximus	KITSE440N
18 Polyester filter with ring Ø44	FA044P
19 Accessory basket L460 Verso-Bottom	ACCE460
21 Complete squeegee tool with foot bracket	ACVF060P/C/MAXN
22 Complete industrial nozzle L450 Ø50 wet/dry	ACSC450IND



60 x 60 x 106 H cm



# ARES PLUS OVEN VERSO OVEN

Verso Oven due motori e Ares Plus Oven un motore sono i modelli tecnicamente studiati per l'aspirazione dei residui lasciati dagli alimenti sui ripiani dei forni elettrici. Il set forno opzionale, il filtro con tessuto per le alte temperature e la bocca di aspirazione in materiale termo-resistente ne consentono l'utilizzo per alcuni istanti in forni accesi. Non idonei all'aspirazione di braci ardenti.

The models VERSO OVEN (equipped with two motors) and ARES PLUS OVEN (equipped with one motor) are technically studied for suction of residues left by food on shelves of electric ovens. The optional oven set along with the filter with fabric for high temperatures and the heat-resistant suction inlet, allow the use of the machines in the oven on (only for some seconds). Not suitable for suction of burning embers.

ASPIRATORI PROFESSIONALI



Motore  
Motor

1



Motori  
Motors

2



D Polvere  
D Dry



Antistatico  
Antistatic



ADI125PMF



VEDI220F

		ADI125PMF	VEDI220F
Motors number	Numero motori	1	2
Stage	Stadi motori	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass
P max (W)	P max (W)	1400	2400
P (W)	Potenza (W)	1200	2050
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	340
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	76
Weight (Kg)	Peso (Kg)	13,7	27,0



## Standard Filters

	DESCRIPTION	CODE	NOTE
1	Filter with fabric for high temperatures with ring Ø44	FA044AT	VEDI220F
2	Filter with fabric for high temperatures with ring Ø34	FA034AT	ADI125PMF

## Options

Kit: KIT038OV [3-4-5-6-7]

	DESCRIPTION	CODE
3	Flexible hose in steel and ceramic with couplings Ø36 2,5m	ACTF036OV
4	Straight aluminum wand with protection L 1,0 mt	ACTA038DP
5	Straight aluminum wand with alf protection L 1,0 mt	ACTA038DSN
6	Straight aluminum wand L 1,0 mt	ACTA038DCMN
7	Oven brush with teflon L 400 mm	ACCV400FMN

## Options

Kit: KIT038FTG [7-8-9-10-11]

	DESCRIPTION	CODE
7	Oven brush with teflon L 400 mm	ACCV400FMN
8	High Temperature Flexible Hose Ø38	ACTG038C
9	Straight aluminum wand 0,95 mt	ACTA038/95
10	Straight aluminum wand L 1,0 mt	ACTA038D
11	Straight aluminum wand L 1,0 mt	ACTA038DCMN



# OVEN

ASPIRATORI PROFESSIONALI



ADI125PMF




40 x 40 x 77 Hcm

VEDI220F



60x60x 106H cm

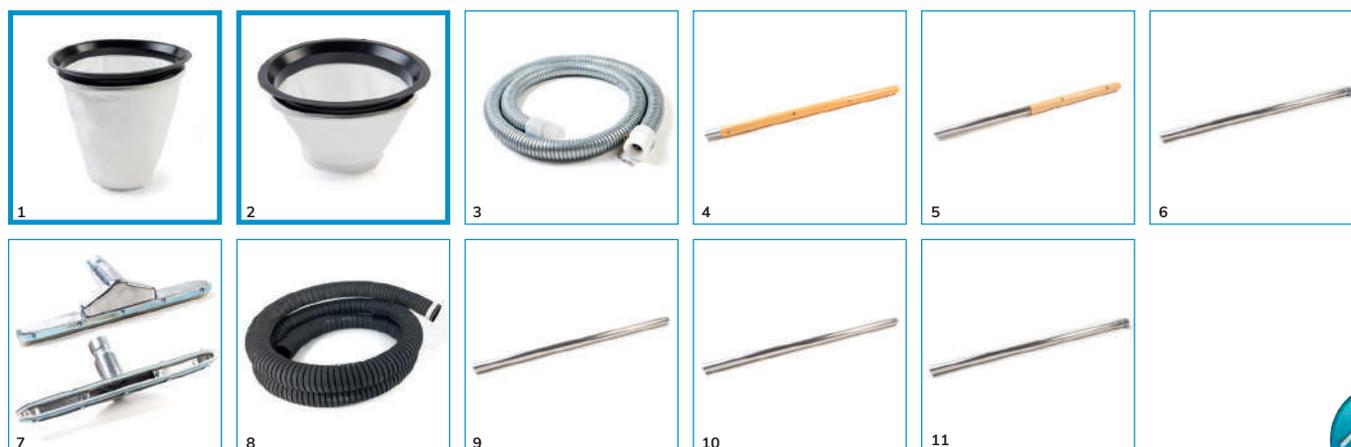

# ESTRO 110

Linea lavamoquette nella versione 21/23 lt, compatto, maneggevole, leggero con innovativo carrello/serbatoio. L'unico della gamma estrattori con il kit polvere di serie: consente di aspirare polveri, liquidi oltre che lavorare come lavamoquette, lavapoltrone, lavapavimenti, etc.

Extractor with 21/23 litres tank, compact, manageable and light with an innovative trolley/tank. The only one of our range of extractors with the dry kit standard. There are different possible uses: dry cleaning, wet cleaning, extractor, armchairwasher, floorwasher.

ASPIRATORI PROFESSIONALI



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet



Lavamoquette  
Clean carpet & floor  
**vacuum**



V Pompa estrattore  
vibrazione  
V Solenoid pump



EWPV11020MT  
EWIV11020MT

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	1250
P (W)	Potenza (W)	1100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	170
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	21 / 23
Capacity Pump (lt/min)	Portata pompa (lt/min)	0,8
Lift pump (bar)	Pressione pompa (bar)	2
Pump (W)	Pompa (W)	48
Detergent tank (lt)	Serbatoio detergente (lt)	8
Weight (kg)	Peso (kg)	16,8 / 17,9



## Standard Accessories and Filters

Kit: KITE036/20 [1-2-3-4-5-6-7-8]

	DESCRIPTION	CODE
1	Complete Hydrolitic flexible hose Ø36 MT	ACTF36C/IN
2	Extractor extension wand Ø37	ACTP037E
3	Armchair nozzle Ø37	ACBL095PO
4	Nozzle carpet tool Ø37 MT	ACBL225
5	Little nozzle Ø37	ACB0037
6	Dusting brush Ø37	ACPE037
7	Crevice tool Ø37	ACLPO37
8	Steel combined nozzle Ø37	ACSP037
9	Polyester filter with ring Ø34	FA034PP
10	Sponge filter for liquids	ACCA165A
11	Anti-Foam Device	CGDA060

## Options

	DESCRIPTION	CODE
12	Charging hose Ø18,5mm L 1,5m + funnel	ACTR185C
13	Paper bag	FI003C



ASPIRATORI PROFESSIONALI



40 x 40 x 77 H cm



# ESTRO 125

Linea di estrattori (tappeti, poltrone, pavimenti, ecc.), versione ad un motore con l'innovativo carrello/serbatoio 8 lt, con fusto da 36 lt in polipropilene o inox. L'utilizzo è sempre associato alla contemporanea erogazione ed aspirazione di detergente (acqua o miscela di acqua e detergente idoneo).

Extractor with a double stage motor it is indicated for the cleaning of carpets, armchairs, moquettes. This model is provided with the very innovative 8 litres detergent tank designed to be assimilated to the trolley and to be completely separated from residual liquids tank. It is available with stainless steel or polypropylene 36 litres tank.



Motore  
Motor

1



W Acqua  
W Wet



Lavamoquette  
Clean carpet & floor  
vacuum



V Pompa estrattore  
vibrazione  
V Solenoid pump

ASPIRATORI PROFESSIONALI



EWPV125  
EWIV125

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	1400
P (W)	Potenza (W)	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37
Capacity Pump (lt/min)	Portata pompa (lt/min)	0,8
Lift pump (bar)	Pressione pompa (bar)	2
Pump (W)	Pompa (W)	48
Detergent tank (lt)	Serbatoio detergente (lt)	8
Weight (kg)	Peso (kg)	17,6 / 18,7



## Standard Accessories and Filters

Kit: KITE040 [1-2]

	DESCRIPTION	CODE
1	Flexible hose+Hydrolitic tube complete mt.2,5 Ø40	ACTF038EN
2	Complete armchair nozzle	ACBL100PO/C
3	Sponge filter for liquids	ACCA165A
4	Anti-Foam Device	CGDA060

## Options

	DESCRIPTION	CODE
5	Polyester filter with ring Ø34	FA034P
6	Paper bag 36lt	FI004C
7	Polyester bag 36lt	FI004P
8	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C
9	Nylon filter Ø334	FINY334AT
10	Complete Handle Ø25 Black Tank 36lt	CMMA025/36C
11	Complete carpet tool 1 jet	ACLA230/C
12	Accessory basket L460-Bottom	ACCE460
13	Bag wet/Dry 37lt	FI5035TNT
14	Charging hose Ø18,5mm L 1,5m + funnel	ACTR185C



ASPIRATORI PROFESSIONALI



40 x 40 x 81 H cm



# ESTRO HOTWAVE 125

HOT WAVE: Macchina a caldo per iniezione ed estrazione, 1 motore, serbatoio detergente 8 lt, fusto 37 lt polipropilene o inox. Maneggevole, pratica e compatta per settore HO.RE.CA e CAR WASH, ideale per una efficace pulizia ad alta temperatura regolata da un termostato fino a 90°

Hot water extractor is equipped with 1 double stage motor, 8 l detergent tank and 37 l polypropylene or stainless steel tank. Being handy, practical and compact, it is advised both for the HORECA and CAR WASH applications. This machine guarantees efficient high-temperature cleaning, regulated by a thermostat up to 90°.



Motore  
Motor

1



W Acqua  
W Wet



Lavamoquette  
Clean carpet & floor  
**vacuum**



V Pompa estraotore  
vibrazione  
V Solenoid pump

ASPIRATORI PROFESSIONALI



EWPV125H  
EWIV125H

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	y pass
P max (W)	P max (W)	2200
P vacuum(W)	Potenza aspiratore (W)	1400
Boiler power (W)	Potenza caldaia (W)	800
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	37
Capacity Pump (lt/min)	Portata pompa (lt/min)	0,8
Lift pump (bar)	Pressione pompa (bar)	2
Pump (W)	Pompa (W)	48
T max detergent (°C)	T max detergente (°C)	90
Detergent tank (lt)	Serbatoio detergente (lt)	8
Weight (kg)	Peso (kg)	18,0

**HOT WAVE**  
**37L**



## Standard Accessories and Filters

Kit: KITE040 [1-2]

	DESCRIPTION	CODE
1	Flexible hose+Hydrolitic tube complete mt.2,5 Ø40	ACTF038EHN
2	Complete armchair nozzle	ACBL100POHC
3	Sponge filter for liquids	ACCA165A
4	Anti-Foam Device	CGDA060

## Options

	DESCRIPTION	CODE
5	Polyester filter with ring Ø34	FA034P
6	Paper bag 37lt	FI004C
7	Polyester bag 37lt	FI004P
8	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C
9	Nylon filter Ø34	FINY334AT
10	Complete carpet tool 1 jet	ACLA230/C
11	Drainage kit Ø28	ACKI028
12	Charging hose Ø18,5mm L 1,5m + funnel	ACTR185C



ASPIRATORI PROFESSIONALI



40 x 40 x 81 H cm



# ESTRO 250-330

Linea di estrattori per tappeti, poltrone, pavimenti, ecc.), versione a due o tre motori con serbatoio 20 lt e fusto basculante in polipropilene o inox. L'utilizzo è sempre associato alla contemporanea erogazione ed aspirazione di detergente (acqua o miscela di acqua e detergente idoneo).

Extractor with two or three double stage motors. It is indicated for the cleaning of carpet, armchair, moquette. This model is provided with the 20 litres detergent tank designed to be completely separated from residual liquids tank. It is available with stainless steel or polypropylene 76 litres tank and tipping trolley.



2 Motori  
Motors



3 Motori  
Motors



W Acqua  
W Wet



Lavamoquette  
Clean carpet  
& floor  
**vacuum**



V Pompa  
estrattore  
vibrazione  
V Solenoid  
pump



R Pompa  
estrattore  
rotativa  
R Peripheral  
electrical pump



		EWPV250 EWIV250	EWPR250 EWIR250	EWPV330 EWIV330
Motors number	Numero motori	2	2	3
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	y passb	y passb	y pass
P max (W)	P max (W)	2600	2600	3300
P (W)	Potenza (W)	2300	2300	2900
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	430	510
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76
Capacity Pump (lt/min)	Portata pompa (lt/min)	0,8	1,8	0,8
Lift pump (bar)	Pressione pompa (bar)	262		
Pump (W)	Pompa (W)	48	90	48
Detergent tank (lt)	Serbatoio detergente (lt)	20	20	20
Weight (kg)	Peso (kg)	25,5 / 27,5	25,5 / 27,7	25,9 / 27,9



## Standard Accessories and Filters

Kit: KITE040 [1-2]

	DESCRIPTION	CODE
1	Flexible hose+Hydrolitic tube complete mt.2,5 Ø40	ACTF038EN
2	Complete armchair nozzle	ACBL100PO/C
2bis	Complete armchair nozzle Estro R	ACBL100POER for EWPR250 and EWIR250
3	Sponge filter for liquids	ACCA165A
4	Anti-Foam Device	CGDA060

## Options


	DESCRIPTION	CODE
5	Polyester filter with ring Ø44	FA044P
6	Paper bag 77lt	FI005C
7	Polyester bag 77lt	FI005P
8	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
9	Nylon filter Ø440	FINY440AT
10	Complete carpet tool 1 jet	ACLA230/C
11	Accessory basket L450-Top	ACCE450VS
12	Drainage kit Ø28	ACKI028
13	Bag wet/Dry 77lt	FI7050TNT
14	Charging hose Ø18,5mm L 1,5m + funnel	ACTR185C



ASPIRATORI PROFESSIONALI



60 x 60 x 106 H cm



# ESTRO HOTWAVE 250

HOT WAVE: Macchina a caldo per iniezione ed estrazione, due motori, serbatoio detergente 20 lt, fusto 77 lt basculante polipropilene o inox. Ideale per una efficace pulizia ad alta temperatura, regolata da un termostato fino a 90°C.

HOT WAVE Extractor with hot water equipped with 2 double stage motors, 77 lt polypropylene or inox tank with tipping trolley, 20 lt detergent tank. This machine is indicated for an efficient high temperature cleaning, thanks to its 90°C thermostat.



2  
Motori  
Motors



W Acqua  
W Wet



Lavamoquette  
Clean carpet & floor  
**vacuum**



Acqua calda  
Hot water



V Pompa  
estrattore  
vibrazione  
V Solenoid  
pump



EWPV250H  
EWIV250H

Motors number	Numero motori	2
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	y pass
P max (W)	P max (W)	3600
P (W)	Potenza (W)	3300
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76
Capacity Pump (lt/min)	Portata pompa (lt/min)	0,8
Lift pump (bar)	Pressione pompa (bar)	2
Pump (W)	Pompa (W)	48
T max detergent (°C)	T maxo detergente (°C)	90
Detergent tank (lt)	Serbatoio detergente (lt)	20
Weight (kg)	Peso (kg)	26,5 / 28,5

**HOT WAVE**




## Standard Accessories and Filters

Kit: KITE040 [1-2]

	DESCRIPTION	CODE
1	Flexible hose+Hydrolitic tube complete mt.2,5 Ø40	ACTF038EHN
2	Complete armchair nozzle	ACBL100POHC
3	Sponge filter for liquids	ACCA165A
4	Anti-Foam Device	CGDA060

## Options

	DESCRIPTION	CODE
5	Polyester filter with ring Ø44	FA044P
6	Paper bag 77lt Max 2mot	FI005C
7	Polyester bag 77lt Max 2mot	FI005P
8	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
9	Nylon filter Ø440	FINY440AT
10	Complete carpet tool 1 jet	ACLA230/C
11	Accessory basket L450-Top	ACCE450VS
12	Drainage kit Ø28	ACKI028
13	Charging hose Ø18,5mm L 1,5m + funnel	ACTR185C

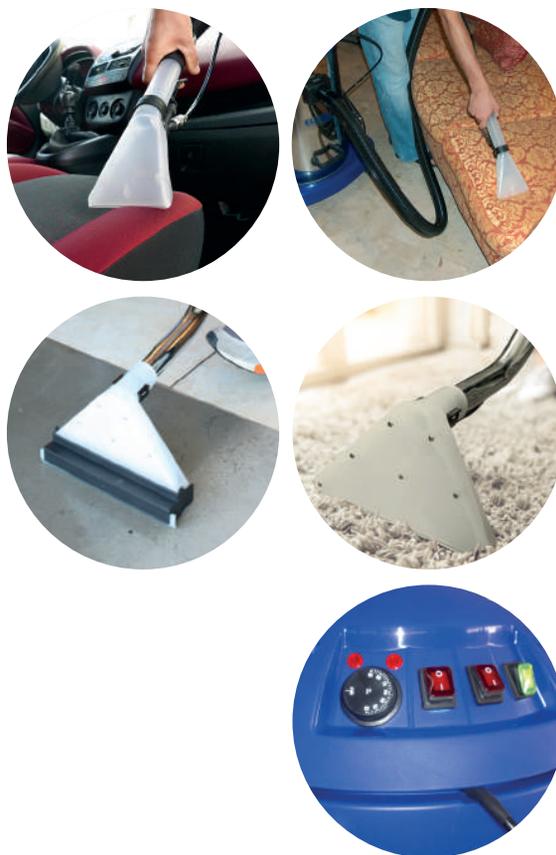

ASPIRATORI PROFESSIONALI



60 x 60 x 106 H cm



# ELECT 125

Ideale per l'utilizzo professionale nella raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspirapolvere.

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on.

ASPIRATORI PROFESSIONALI



1 Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool

AUTOMATIC  
STARTER



		ELWP125A ELWI125AE	ELWP125E LWI125E	ELWP125EA ELWI125EA
Motors number	Numero motori	11		1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by passb	y pass	by pass
P max vacuum(W)	P max aspirazione(W)	1400	1400	1400
P (W)	Potenza (W)	-	2000	2000
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	215	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37	37
Weight (Kg)	Peso (Kg)	12,7 / 13,8	12,8 / 13,9	13,0 / 14,1



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Polyester filter with ring Ø34	FA034P
3	Nylon filter Ø334	FINY334AT
4	Sponge filter for liquids	ACCA165A

### Options

Kit: KITWIO40PL [5-6-7-8-9-10-11-12]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLP040
6	Chrome extension wand Ø40	ACTC038D
7	Chrome extension wand-male Ø40	ACTC038C
8	Nozzle body A/P L300 Ø40	ACCS300A/P
9	Slide-on for liquid nozzle L300	ACIL300
10	Slide-on brush for floor nozzle L300	ACIP300
11	Dusting brush Ø36	ACPE040
12	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
13	Paper bag 36lt - reinforced	FI006C
14	Polyester bag 36lt	FI004P
15	Cartridge filter Ø175 - H140 HEPA	FI175140HL/C
16	Power head L350	ACES350
17	Slide-on for carpet steam nozzle L300	ACIT300
18	Accessory basket L460 - Bottom	ACCE460
19	Accessory basket L350 - Top	ACCE350/SUP
20	Complete Handle Ø25 Black Tank 36lt	CMMA025/36C
21	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5CN
22	Y Coupling inlet	ACMD048/C



40 x 40 x 77 H cm



ASPIRATORI PROFESSIONALI



# ELECT 125 Mclass

Ideale per l'utilizzo professionale nella raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspiratore. Adatto all'aspirazione di polveri secche, polveri di legno e comunque polveri pericolose con valori MAK 0,1 mg/m<sup>3</sup> (categoria polvere M).

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on. This model is suitable to pick up dry sawdust and hazardous dusts with maximum room concentration values MAK 0,1 mg/m<sup>3</sup> (dust class M).



Motore  
Motor

1



D Polvere  
D Dry



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool

ASPIRATORI PROFESSIONALI

AUTOMATIC  
STARTER



		EMDP125AE EMDI125AE	MDP125E MDI125E	EMDP125EA EMDI125EA
Motors number	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass	by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400	1400
P (W)	Potenza (W)	-	2000	2000
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	215	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37	37
Weight (Kg)	Peso (Kg)	12,7 / 13,8	12,8 / 13,9	13,0 / 14,1



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Polyester bag 37lt	FI004P
3	Hepa cartridge filter Ø202 - H170	FI202170HL


### Options

Kit: KITV040N [4-5-6-7-8-9-10]

	DESCRIPTION	CODE
4	Crevice tool Ø40	ACLP040
5	Chrome extension wand Ø40	ACTC038D
6	Chrome extension wand-male Ø40	ACTC038C
7	Nozzle body A/P L300 Ø40	ACCS300A/P
8	Slide-on brush for floor nozzle L300	ACIP300
9	Dusting brush Ø40	ACPE040
10	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
11	Accessory basket L460 - Bottom	ACCE460
12	Accessory basket L350 - Top	ACCE350/SUP
13	Complete Handle Ø25 Black Tank 36it	CMMA025/36C
14	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5CN
15	Y Coupling inlet	ACMD048/C



ASPIRATORI PROFESSIONALI

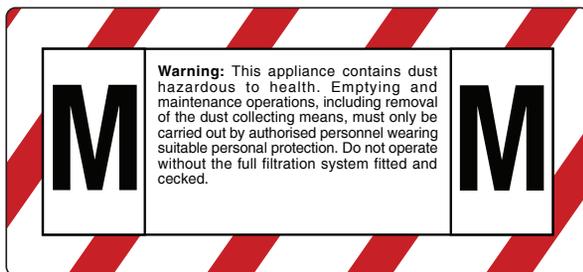

40 x 40 x 77 H cm



# ELECT 125 Hclass

Ideale per l'utilizzo professionale nella raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspiratore. Adatto all'aspirazione di tutte le piccole particelle di polvere, incluse quelle cancerogene e patogeni (categoria polvere H).

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on. This model is suitable to pick up all small dust particles including carcinogens and pathogens (dust class H).



Motore  
Motor

1



D Polvere  
D Dry



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool

ASPIRATORI PROFESSIONALI

AUTOMATIC  
STARTER



		EHDP125A EHDI125A	EHDP125E EHDI125E	EHDP125EA EHDI125EA
Motors number	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	y passb	y passb	y pass
P max vacuum (W)	P max aspirazione (W)	1400	14001	400
P (W)	Potenza (W)	1200	12001	200
P max tool (W)	P max utensile (W)	-	20002	000
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	2152	15	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37	37
Weight (Kg)	Peso (Kg)	12,7 / 13,8	12,8 / 13,9	13,0 / 14,1



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Polyester bag 37lt	FI004P
3	Conic hepa cartridge filter Ø202 - H170	FI202170HL
4	Polyester filter with ring Ø34	FA034P


## Options

Kit: KITV040N [5-6-7-8-9-10-11]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLP040
6	Chrome extension wand Ø40	ACTC038D
7	Chrome extension wand-male Ø40	ACTC038C
8	Nozzle body A/P L300 Ø40	ACCS300A/P
9	Slide-on brush for floor nozzle L300	ACIP300
10	Dusting brush Ø40	ACPE040
11	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/C
12	Accessory basket L350-Bottom	ACCE350
13	Accessory basket L350 - Top	ACCE350/SUP
14	Complete Handle Ø25 Black Tank 36lt	CMMA025/36C
15	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5C
16	Y Coupling inlet	ACMD048/C



ASPIRATORI PROFESSIONALI

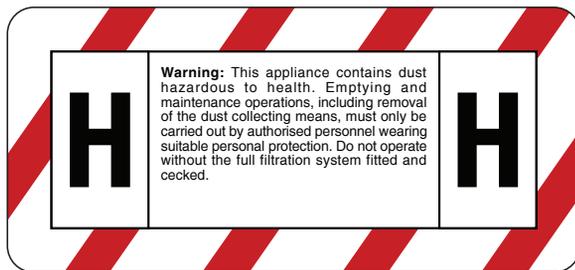

40 x 40 x 77 H cm



# ELECT 250 N

Ideale per l'utilizzo professionale della raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspirapolvere.

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on.



2  
Motori  
Motors



D Polvere  
D Dry



W Acqua  
W Wet



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool

ASPIRATORI PROFESSIONALI

## AUTOMATIC STARTER



		ELWPN250A ELWIN250A	ELWPN250E ELWIN250E	ELWPN250EA ELWIN250EA
Motors number	Numero motori	2	2	2
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	by pass	by pass	by pass
P max vacuum (W)	P max aspirazione (W)	2600	2600	2600
P (W)	Potenza (W)	2300	2300	2300
P max tool (W)	P max utensile (W)	-	1200	1200
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	430	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	21,3 / 23,1	21,5 / 23,3	21,7 / 23,5



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Polyester filter with ring Ø44	FA044P
3	Nylon filter Ø440	FINY440AT
4	Sponge filter for liquids	ACCA165A

## Options

Kit: KITW040N [5-6-7-8-9-10-11-12]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLPO40
6	Chrome extension wand Ø40	ACTC038D
7	Chrome extension wand-male Ø40	ACTC038C
8	Nozzle body A/P L400 Ø40	ACCS400A/P
9	Slide-on for liquids nozzle L400	ACIL400
10	Slide-on brush for floor nozzle L400	ACIP400
11	Dusting brush Ø40	ACPE040
12	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
13	Paper bag 77lt Max 2mot	FI005C
14	Polyester bag 77lt Max 2mot	FI005P
15	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
16	Slide-on for carpet nozzle L400	ACIT400
17	Accessory basket L450 Exel-Bottom	ACCE450E
18	Accessory basket L450 - Top	ACCE450ES
19	Exel black handle Ø25 - Complete	CMMA025EX/C
20	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5CN
21	Y Coupling inlet Ø48	ACMD048/C



60 x 60 x 96 H cm



ASPIRATORI PROFESSIONALI



# ELECT 250 B

Ideale per l'utilizzo professionale per la raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspirapolvere. Versione con carrello e fusto basculante.

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on. Provided with tipping trolley.



**2** Motori  
Motors



**D** Polvere  
**D** Dry



**W** Acqua  
**W** Wet



**EA** per utensile elettricoe pneumatico  
**EA** for electric tool and pneumatic tool

ASPIRATORI PROFESSIONALI

## AUTOMATIC STARTER



		ELWPB250A ELWIB250A	ELWPB250E ELWIB250E	ELWPB250EA ELWIB250EA
Motors number	Numero motori	2	2	2
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamentob	y pass	by pass	by pass
P max vacuum (W)	P max aspirazione (W)	2600	2600	2600
P (W)	Potenza (W)	2300	2300	2300
P max tool (W)	P max utensile (W)	-	1200	1200
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	430	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	25,5 / 27,5	25,7 / 27,7	25,9 / 27,9



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Polyester filter with ring Ø44	FA044P
3	Nylon filter Ø440	FINY440AT
4	Sponge filter for liquids	ACCA165A

## Options

Kit: KITW040 [5-6-7-8-9-10-11-12]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLP040
6	Chrome extension wand Ø40	ACTC038D
7	Chrome curved extension wand-male Ø40	ACTC038C
8	Nozzle body A/P L400 Ø40	ACCS400A/P
9	Slide-on for liquids nozzle L400	ACIL400
10	Slide-on brush for floor nozzle L400	ACIP400
11	Dusting brush Ø40	ACPE040
12	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
13	Paper bag 77lt Max 2mot	FI005C
14	Polyester bag 77lt Max 2mot	FI005P
15	Cartridge filter Ø250 - H178 HEPA	FI250178HL/C
16	Slide-on for carpet nozzle L400	ACIT400
17	Accessory basket L450 Verso-Bottom	ACCE460
18	Accessory basket L450 Verso - Top	ACCE450VS
19	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5CN
20	Y Coupling inlet Ø48	ACMD048/C



60 x 60 x 106 H cm



ASPIRATORI PROFESSIONALI



# VIBRA 125

Il modello VIBRA è adatto per essere utilizzato insieme a uno strumento elettrico o pneumatico per un'aspirazione professionale degli sterili. Questo modello è stato dotato di un microprocessore che consente l'avvio e l'arresto automatici dell'aspirazione attraverso un utensile. Grazie al filtro di pulizia intelligente, questo modello consente una pulizia automatica del filtro. Un paio di vibratori elettromeccanici si attivano ogni volta che si spegne l'utensile.

The VIBRA model is fit to be used together with an electric or pneumatic tool for a professional suction of tailings. This model has been endowed with an microprocessor that allows the automatic start and stop of the suction through a power tool. Thanks to the Intelligent cleaning filter, this model grants an automatic cleaning of the filter. A couple of electromechanical vibrators starts up everytime that the power tool is turned off.



Motore  
Motor

1



D Polvere  
D Dry



Filtro autopulente  
Intelligent cleaning filter



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool



## AUTOMATIC STARTER



		VIDP125AUV VIDI125AUV	IDP125EU IDI125EUV	VIDP125EAU IDI125EAU
Motors number	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamentob	y pass	by pass	by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400	1400
P (W)	Potenza (W)	1200	1200	1200
P max tool (W)	P max utensile (W)	-	2000	2000
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	215	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37	37
Weight (Kg)	Peso (Kg)	12,7 / 13,8	12,8 / 13,9	13,0 / 14,1



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Hepa washable cartridge filter H14	FI202170HL
3	Anti-Foam Device	CGDA060

## Options

Kit: KITV040N [4-5-6-7-8-9-10]

	DESCRIPTION	CODE
4	Crevice tool Ø40	ACLP040
5	Chrome extension wand Ø40	ACTC038D
6	Chrome curved extension wand-male Ø40	ACTC038C
7	Nozzle body A/P L300 Ø40	ACCS300A/P
8	Slide-on brush for floor nozzle L300	ACIP300
9	Dusting brush Ø40	ACPE040
10	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
11	Polyester filter with ring Ø34	FA034P
12	Nylon filter Ø334	FINY334AT
13	Slide-on for carpet nozzle L300	ACIT300
14	Accessory basket L460 Bottom	ACCE460
15	Accessory basket L350 Top	ACCE350/SUP
16	Complete Handle Ø25 - Black Tank 36lt	CMMA025/36C
17	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5CN
18	Y Coupling inlet Ø48	ACMD048/C



ASPIRATORI PROFESSIONALI



40 x 40 x 77 H cm



# VIBRA 125 Mclass

Il modello Vibra è adatto per essere utilizzato insieme ad un elettro utensile elettrico o pneumatico per l'aspirazione professionale degli sterili. Questo modello è stato dotato di un microprocessore che consente l'avvio e l'arresto automatici dell'aspirazione attraverso un utensile. Grazie al filtro di pulizia intelligente, Vibra garantisce una pulizia automatica del filtro. Un paio di vibratori elettromeccanici si attivano ogni volta che si spegne l'utensile. Questo modello è adatto per raccogliere segatura secca e polveri pericolose con i valori massimi di concentrazione ambiente MAK 0,1 mg / m<sup>3</sup> (classe di polveri M).

The Vibra M model is fit to be used together with an electric or pneumatic power tool for professional suction of tailings. This model has been endowed with a microprocessor that allows the automatic start and stop of the suction through a power tool. Thanks to the intelligent cleaning filter, Vibra grants an automatic cleaning of the filter. A couple of electromechanical vibrators starts up everytime that the power tool is turned off. This model is suitable to pick up dry sawdust and hazardous dusts with maximum room concentration values MAK 0,1mg/m<sup>3</sup> (dust class M).

ASPIRATORI PROFESSIONALI



Motore  
Motor

1



D Polvere  
D Dry



Filtro autopulente  
Intelligent cleaning filter



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool



## AUTOMATIC STARTER



		VMDP125A VMDI125A	VMDP125E VMDI125E	VMDP125EA VMDI125EA
Motors number	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	y pass	by pass	by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400	400
P (W)	Potenza (W)	1200	1200	1200
P max tool (W)	P max utensile (W)	-	2000	2000
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	215	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37	37
Weight (Kg)	Peso (Kg)	12,7 / 13,8	12,8 / 13,9	13,0 / 14,1




## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	Hepa washable cartridge filter H14	FI202170HL
3	Polyester bag 37lt	FI004P

### Options

Kit: KITV040N [4-5-6-7-8-9-10]

	DESCRIPTION	CODE
4	Crevice tool Ø40	ACLP040
5	Chrome extension wand Ø40	ACTC038D
6	Chrome curved extension wand-male Ø40	ACTC038C
7	Nozzle body A/P L300 Ø40	ACCS300A/P
8	Slide-on brush for floor nozzle L300	ACIP300
9	Dusting brush Ø40	ACPE040
10	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/C
11	Accessory basket L460 Bottom	ACCE460
12	Accessory basket L350 Top	ACCE350/SUP
13	Complete Handle Ø25 - Black Tank 36lt	CMMA025/36C
14	Flexible with pneumatic hose Ø28 4,5 mt	ACTF028P4,5CN
15	Y Coupling inlet Ø48	ACMD048/C

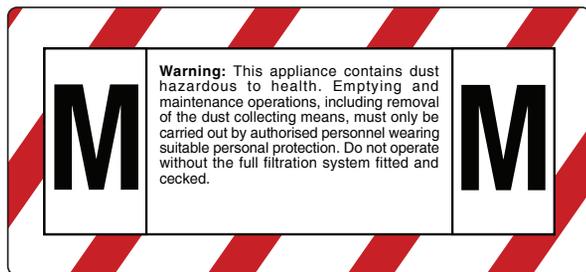

40 x 40 x 77 H cm



# BIG VIBRA 250 B

Il modello BIG VIBRA è adatto ad essere utilizzato insieme ad un utensile elettrico o pneumatico per l'aspirazione professionale degli sterili. Questo modello è stato dotato di un microprocessore che consente l'avvio e l'arresto automatici dell'aspirazione attraverso un utensile. Grazie al filtro di pulizia intelligente questo modello garantisce una pulizia automatica del filtro. Una coppia di vibratori elettromeccanici si avvia ogni volta che si spegne l'utensile.

The BIG VIBRA model is fit to be used together with an electric or pneumatic tool for a professional suction of tailings. This model has been endowed with a microprocessor that allows the automatic start and stop of the suction through a power tool. Thanks to the Intelligent cleaning filter this model grants an automatic cleaning of the filter. A couple of electromechanical vibrators starts up everytime that the power tool is turned off.

ASPIRATORI PROFESSIONALI



2 Motori  
2 Motors



D Polvere  
D Dry



Filtro autopulente  
Intelligent cleaning filter



EA per utensile elettrico  
EA for electric tool and pneumatic tool



**AUTOMATIC STARTER**



		VIDP250AU VIDI250AU	VIDP250EU VIDI250EU	VIDP250EAU VIDI250EAU
Motors number	Numero motori	2	2	2
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	y pass	by pass	by pass
P max (W)	P max (W)	2600	2600	600
P (W)	Potenza (W)	2300	2300	2300
P max tool (W)	P max utensile (W)	-	1200	1200
Pressure min - max (bar)	Pressione mini - max (bar)	4 - 15	-	4 - 15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	430	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77 / 76	77 / 76	77 / 76
Weight (Kg)	Peso (Kg)	25,5 / 27,5	25,7 / 27,7	25,9 / 27,9



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN
2	HEPA Cartridge filter Ø250 - H178	FI250178HL

### Options

Kit: KITW040B [3-4-5-6-7-8-9]

	DESCRIPTION	CODE
3	Crevice tool Ø40	ACLP040
4	Chrome extension wand Ø40	ACTC038D
5	Chrome curved extension wand-male Ø40	ACTC038C
6	Nozzle body A/P L400 Ø40	ACCS400A/P
7	Slide-on brush for floor nozzle L400	ACIP400
8	Dusting brush Ø40	ACPE040
9	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
10	Polyester filter with ring Ø44	FA044P
11	Polyester bag 77lt Max 2mot	FI005P
12	Flexible with pneumatic hose Ø28 4,5mt.	ACTF028P4,5CN
13	Y Coupling inlet Ø48	ACMD048/C
14	Slide-on for carpet nozzle L400	ACIT400
15	Accessory basket L450 Verso-Bottom	ACCE460
16	Accessory basket L450 Verso-Top	ACCE450VS



60 x 60 x 106 H cm

ASPIRATORI PROFESSIONALI





# ASPIRATORI INDUSTRIALI



ASPIRATORI INDUSTRIALI



# XTOOL TOP

L' XTOOL è l'aspiratore professionale per cantieri, officine, carrozzerie e per l'artigianato in genere. La macchina è dotata di una ampia superficie filtrante ed ha una autonomia di lavoro eccellente anche con polveri fini e umide. I filtri HEPA quando intasati vengono ripuliti automaticamente senza soste.

L' elettronica garantisce: il soft start per l'avvio del motore di aspirazione; lo spegnimento automatico a riempimento liquidi; l'AUTOMATIC STARTER in simbiosi con l'utensile elettrico e/o pneumatico collegato.

The XTOOL is our professional vacuum cleaner designed for construction sites, workshops, car body shops and all craftsmen activities. The vacuum cleaner is equipped with a large filtering surface and has an excellent working autonomy with all kind of fine and humid dust. When the HEPA filters are clogged, it is possible to clean them automatically without interruptions. The electronic system guarantees a soft start mode for starting the suction motor and the automatic switch-off when the tank is full of liquids, in addition to the AUTOMATIC STARTER used with the electric and/or pneumatic tool.



Motore  
Motor



D Polvere  
D Dry



W Acqua  
W Wet



Filtro autopulente  
Intelligent cleaning filter



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool



ASPIRATORI INDUSTRIALI



ALSO AVAILABLE



		XT14EH XT14E	XT14AH XT14A	XT14EAH XT14EA
Motors number	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	HI-speed by pass	HI-speed by pass	HI-speed by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400	1400
P max tool (W)	P max utensile (W)	2000	NO	2000
Pressure min - max (bar)	Pressione mini - max (bar)	NO	4-12	4 -12
Waterlift (mbar)	Depressione (mbar)	245	245	245
Air flow (l/s)	Aria aspirata (l/s)	56	56	56
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	35	35	35
Powercord lenght (m)	Lunghezza cavo (m)	8,5	8,5	8,5
Powercord type	Tipo di cavo	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5
Weight (Kg)	Peso (Kg)	17,5	17,5	18,5
Machine dimension (PxLxH)	Dimensioni macchina (PxLxH)	57x39x58,5	57x39x58,5	57x39x58,5
Box dimension (PxLxH)	Dimensioni scatola (PxLxH)	58x40x65	58x40x65	58x40x65



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACX028 for XT14E
2	Flexible with pneumatic hose 4,5mt Ø28	ACX028P for XT14EA
3	Hepa filter PTFE XTOOL (2pcs)	FI1890XT
4	Hepa bag XTOOL	FIHXT

## Options

Kit: KITW040XT [5-6-7-8-9-10-11]

	DESCRIPTION	CODE
5	Complete flexible hose Ø40	ACTX038
6	Crevice tool Ø40	ACLP040
7	Chrome extension wand Ø40	ACTC038CF
8	Chrome curved extension wand-male Ø40	ACTC038C
9	Dry floor nozzle L400mm	ACCS400F
10	Wet floor nozzle L400mm	ACCV400F
11	Dusting brush Ø40	ACPE040



60 x 60 x 96 H cm

ASPIRATORI INDUSTRIALI



# XTOOL SHAKE

La XTOOL V è l'aspiratore professionale per cantieri, officine, carrozzerie e per l'artigianato in genere. La macchina è dotata di una ampia superficie filtrante ed ha una autonomia di lavoro eccellente anche con polveri fini e umide. I filtri HEPA quando intasati vengono ripuliti automaticamente a fine lavoro. La elettronica garantisce la funzione AUTOMATI CSTARTER, ovvero l'avvio e lo spegnimento del motore di aspirazione in simbiosi con l'utensile elettrico e/o pneumatico collegato.

The XTOOL is our professional vacuum cleaner designed for construction sites, workshops, car body shops and all craftsmen activities. The vacuum cleaner is equipped with a large filtering surface and has an excellent working autonomy with all kind of fine and humid dust. When the HEPA filters are clogged, it is possible to clean them automatically at the end of work. The electronic system guarantees the automatic switch-off of the vacuum motor during the use of the electric and/or pneumatic tool, AUTOMATI CSTARTER function.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet



Filtro autopulente  
Intelligent cleaning filter



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool



ASPIRATORI INDUSTRIALI

## ALSO AVAILABLE



XT14EVM  
XT14AVM  
XT14EAVM

## WET&DRY

		XT14EVM XT14EV	XT14AVM XT14AV	XT14EAVM XT14EAV	XT14EVMW	XT14AVW	XT14EAVW
Motors number	Numero motori	1	1	1	1	1	1
Stage	Stadi motori	double	double	double	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	HI-speed by pass	HI-speed by pass	HI-speed by pass	HI-speed by pass	HI-speed by pass	HI-speed by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400	1400	1400	1400	1400
P max tool (W)	P max utensile (W)	2000	NO	2000	2000	NO	2000
Pressure min - max (bar)	Pressione mini - max (bar)	NO	4-12	4-12	NO	4-12	4-12
Waterlift (mbar)	Depressione (mbar)	245	245	245	245	245	245
Air flow (l /s)	Aria aspirata (l /s)	56	56	56	56	56	56
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	67	67	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	35	35	35	35	35	35
Power cord lenght (m)	Lunghezza cavo (m)	8,5	8,5	8,5	8,5	8,5	8,5
Power cord type	Tipo di cavo	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5
Weight (Kg)	Peso (Kg)	17,5	17,5	18,5	17,5	17,5	18,5
Machine dimension (PxLxH)	Dimensioni macchina (PxLxH)	57x39x58,5	57x39x58,5	57x39x58,5	57x39x58,5	57x39x58,5	57x39x58,5
Box dimension (PxLxH)	Dimensioni scatola (PxLxH)	58x40x65	58x40x65	58x40x65	58x40x65	58x40x65	58x40x65



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACX028 for XT14E
2	Flexible with pneumatic hose 4,5mt Ø28	ACX028P for XT14EA
3	Hepa filter PTFE XTOOL (2pcs)	FI1890XT
4	Hepa bag XTOOL	FIHXT

## Options

Kit: KITW040XTV [5-6-7-8-9-10]

	DESCRIPTION	CODE
5	Complete flexible hose Ø40	ACTX038
6	Crevice tool Ø40	ACLP040
7	Chrome extension wand Ø40	ACTC038CF
8	Chrome curved extension wand-male Ø40	ACTC038C
9	Dry floor nozzle L400mm	ACCS400F
10	Dusting brush Ø40	ACPE040

XT14EV  
XT14AV  
XT14EAV

XT14EVM  
XT14AVM  
XT14EAVM



Kit: KITW040XT [5-6-7-8-9-10-11]

	DESCRIPTION	CODE
5	Complete flexible hose Ø40	ACTX038
6	Crevice tool Ø40	ACLP040
7	Chrome extension wand Ø40	ACTC038CF
8	Chrome curved extension wand-male Ø40	ACTC038C
9	Dry floor nozzle L400mm	ACCS400F
10	Dusting brush Ø40	ACPE040
11	Wet floor nozzle L400mm	ACCV400F

WET&DRY

XT14EVM  
XT14AVM  
XT14EAVM



ASPIRATORI INDUSTRIALI



60 x 60 x 96 H cm



# XTOOL EL

La XTOOL L è l'aspiratore professionale per cantieri, officine, carrozzerie e per l'artigianato in genere. La macchina è dotata di una ampia superficie filtrante ed ha una autonomia di lavoro eccellente anche con polveri fini e umide. La elettronica garantisce la funzione AUTOMATI CSTARTER, ovvero l'avvio e lo spegnimento del motore di aspirazione in simbiosi con l'utensile elettrico e/o pneumatico collegato. Nelle versioni WET&DRY la macchina è equipaggiata con elettronica blocco liquidi automatica.

The XTOOL is our professional vacuum cleaner designed for construction sites, workshops, car body shops and all craftsmen activities. The vacuum cleaner is equipped with a large filtering surface and has an excellent working autonomy with all kind of fine and humid dust. The electronic system guarantees the automatic switch-off of the vacuum motor during the use of the electric and/or pneumatic tool, AUTOMATI C STARTER function. WET&DRY versions the machine is equipped with automatic liquid blocking electronics.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet



EA per utensile  
elettrico e pneumatico  
EA for electric tool  
and pneumatic tool



## ALSO AVAILABLE



XT14ELM  
XT14ALM  
XT14EALM

ASPIRATORI INDUSTRIALI

## WET&DRY

		XT14ELM XT14EL	XT14ALM XT14AL	XT14EALM XT14EAL	XT14ELW	XT14ALW	XT14EALW
Motors number	Numero motori	1	1	1	1	1	1
Stage	Stadi motori	double	double	double	double	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
Cooling	Tipo raffreddamento	HI-speed by pass	HI-speed by pass	HI-speed by pass	HI-speed by pass	HI-speed by pass	HI-speed by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400	1400	1400	1400	1400
P max tool (W)	P max utensile (W)	2000	NO	2000	2000	NO	2000
Pressure min - max (bar)	Pressione mini - max (bar)	NO	4-12	4-12	NO	4-12	4-12
Waterlift (mbar)	Depressione (mbar)	245	245	245	245	245	245
Air flow (l/s)	Aria aspirata (l/s)	56	56	56	56	56	56
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67	67	67	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	35	35	35	35	35	35
Power cord lenght (m)	Lunghezza cavo (m)	8,5	8,5	8,5	8,5	8,5	8,5
Power cord type	Tipo cavo	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5	H07rn-f 3x1,5
Weight (Kg)	Peso (Kg)	17,5	17,5	18,5	17,5	17,5	18,5
Machine dimension (PxLxH)	Dimensioni macchina (PxLxH)	57x39x58,5	57x39x58,5	57x39x58,5	57x39x58,5	57x39x58,5	57x39x58,5
Box dimension (PxLxH)	Dimensioni scatola (PxLxH)	58x40x65	58x40x65	58x40x65	58x40x65	58x40x65	58x40x65



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACX028 for XT14E
2	Flexible with pneumatic hose 4,5mt Ø28	ACX028P for XT14EA
3	Hepa filter PTFE XTOOL (2pcs)	FI1890XT
4	Hepa bag XTOOL	FIHXT



## Options

Kit: KITW040XTV [5-6-7-8-9-10]

	DESCRIPTION	CODE
5	Complete flexible hose Ø40	ACTX038
6	Crevice tool Ø40	ACLP040
7	Chrome extension wand Ø40	ACTC038CF
8	Chrome curved extension wand-male Ø40	ACTC038C
9	Dry floor nozzle L400mm	ACCS400F
10	Dusting brush Ø40	ACPE040

XT14EL  
XT14AL  
XT14EAL

XT14ELM  
XT14ALM  
XT14EALM



Kit: KITW040XT [5-6-7-8-9-10-11]

	DESCRIPTION	CODE
5	Complete flexible hose Ø40	ACTX038
6	Crevice tool Ø40	ACLP040
7	Chrome extension wand Ø40	ACTC038CF
8	Chrome curved extension wand-male Ø40	ACTC038C
9	Dry floor nozzle L400mm	ACCS400F
10	Dusting brush Ø40	ACPE040
11	Wet floor nozzle L400mm	ACCV400F

WET&DRY

XT14ELW  
XT14ALW  
XT14EALW



ASPIRATORI INDUSTRIALI



60 x 60 x 96 H cm



# XTOOL EASY

La XTOOL L è l'aspiratore professionale per cantieri, officine, carrozzerie e per l'artigianato in genere. La macchina è dotata di una ampia superficie filtrante ed ha una autonomia di lavoro eccellente anche con polveri fini e umide.

The XTOOL is our professional vacuum cleaner designed for construction sites, workshops, car body shops and all craftsmen activities. The vacuum cleaner is equipped with a large filtering surface and has an excellent working autonomy with all kind of fine and humid dust.



Motore  
Motor

1



D Polvere  
D Dry



W Acqua  
W Wet



ASPIRATORI INDUSTRIALI

## WET&DRY

		XT14	XT14W
Motors number	Numero motori	1	1
Stage	Stadi motori	double	double
Volt (V)	Volt (V)	220 - 240	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Cooling	Tipo raffreddamento	HI-speed by pass	HI-speed by pass
P max vacuum (W)	P max aspirazione (W)	1400	1400
Waterlift (mbar)	Depressione (mbar)	245	245
Air flow (l/s)	Aria aspirata (l/s)	56	56
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	35	35
Powercordlength (m)	Lunghezza cavo (m)	8,5	8,5
Power cord type	Tipoci cavo	H07rn-f 3x1,5	H07rn-f 3x1,5
Weight (Kg)	Peso (Kg)	15,5	15,5
Machine dimension (PxLxH)	Dimensioni macchina (PxLxH)	57x39x58,5	57x39x58,5
Box dimension (PxLxH)	Dimensioni scatola (PxLxH)	58x40x65	58x40x65



## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Hepa filter PTFE XTOOL (2pcs)	FI1890XT
2	Hepa bag XTOOL	FIHXT
3	Complete flexible hose Ø40	ACTX038
4	Crevice tool Ø40	ACLP040
5	Chrome extension wand Ø40	ACTC038CF
6	Chrome curved extension wand-male Ø40	ACTC038C
7	Dry floor nozzle L400mm	ACCS400F
8	Dusting brush Ø40	ACPE040
9	Wet floor nozzle L400mm	ACCV400F (only for XT14W)



60 x 60 x 96 H cm

ASPIRATORI INDUSTRIALI



# ALTAI

ALTAI è un pratico e maneggevole aspirapolvere studiato per l'utilizzo in concomitanza con un utensile elettrico o pneumatico. È fornito di avviamento automatico e scuotifiltro automatico. ALTAI può anche essere utilizzato come un normale aspirapolvere, selezionando la modalità manuale.

Altai: is a small vac studied to be used with an electric tool. It is provided with automatic starter and automatic filter shaker. ALTAI can even be used as a standard vacuum cleaner, just selecting the manual mode.



Motore  
Motor



Polvere  
Dry



ASPIRATORI INDUSTRIALI



		◆ BL110ES	◆ BL110AS	◆ BL110EAS
Number motors	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60	50/60
Cooling	Tipo raffreddamento	By pass	By pass	By pass
P max (W)	P max (W)	1250	1250	1250
P max Tool (W)	Potenza max utensile(W)	2000	-	2000
Pressure min-max (bar)	Pressione min-max (bar)	-	4-15	4-15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250	2250	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	170	170	170
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	23	23	23
Weight (Kg)	Peso (Kg)	11,8	11,8	11,8



- ◆ E for electric tool
- ◆ A for pneumatic tool
- ◆ EA for electric and pneumatic tool


### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN for BL110E
2	Flexible whit pneumatic hose Ø28 - 4,5mt	ACTF028P4,5CN for BL110A-BL110EA
3	Conic cartridge H14 filter Ø202 - H170	FI202170HL
4	Polyester bag 23lt	FI003P

### Options

KITV040 [ 5 - 11 ]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLP040
6	Chrome curved extension wand-male Ø40	ACTC038C
7	Chrome extension wand Ø40	ACTC038D
8	Dusting brush Ø40	ACPE040
9	Nozzle body A/P L300 Ø40	ACCS300A/P
10	Slide-on brush for floor nozzle L300	ACIP300
11	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
12	Tool tray 40x50cm	CMPU4050
13	Polyester filter with ring Ø340	FA034P
14	Nylon filter	FINY334AT

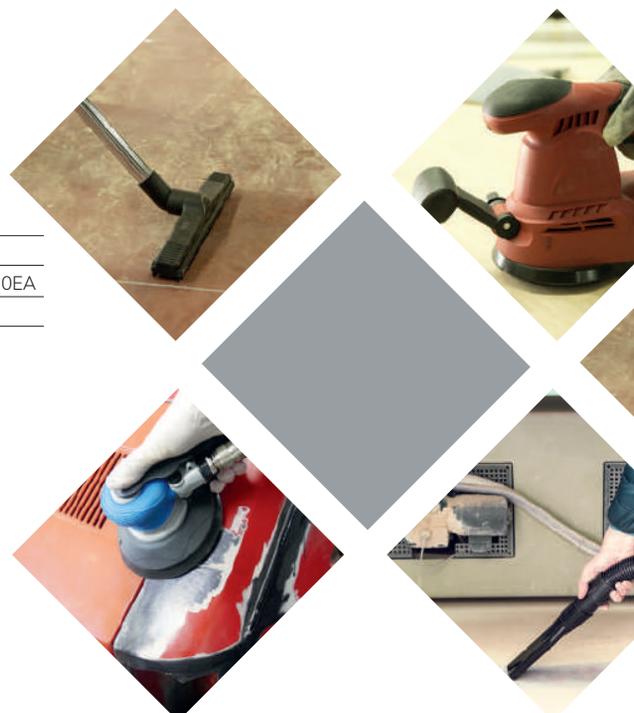

ASPIRATORI INDUSTRIALI



# AURA

AURA è un aspirapolvere da 37l creato per l'utilizzo professionale e industriale in concomitanza con utensili. È fornito di un motore da 1400W. L'avvio automatico e lo scuotifiltro automatico sono comandati direttamente dall'utensile collegato all'aspirapolvere.

AURA is a 37lt-vac created for industrial and professional use with tools. It is provided with a 1400W motor. The automatic start and automatic filter shaker are controlled by the connected tool.



ASPIRATORI INDUSTRIALI



		◆ BL125ES	◆ BL125AS	◆ BL125EAS
Number motors	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60	50/60
Cooling	Tipo raffreddamento	By pass	By pass	By pass
P max (W)	P max (W)	1400	1400	1400
P max Tool (W)	Potenza max utensile(W)	2000	-	2000
Pressure min-max (bar)	Pressione min-max (bar)	-	4-15	4-15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215	215	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37	37
Weight (Kg)	Peso (Kg)	12,8	12,8	12,8



40 x 40 x 77 H cm

- ◆ E for electric tool
- ◆ A for pneumatic tool
- ◆ EA for electric and pneumatic tool


### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN for BL125E
2	Flexible whit pneumatic hose Ø28 - 4,5mt	ACTF028P4,5CN for BL125A-BL125EA
3	Conic cartridge H14 filter Ø202 - H170	FI202170HL
4	Reinforced paper bag 37lt	FI006C

### Options

KITV040N [ 5 - 11 ]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLP040
6	Chrome curved extension wand-male Ø40	ACTC038C
7	Chrome extension wand Ø40	ACTC038D
8	Dusting brush Ø40	ACPE040
9	Nozzle body A/P L300 Ø40	ACCS300A/P
10	Slide-on brush for floor nozzle L300	ACIP300
11	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
12	Tool tray 40x50cm	CMPU4050
13	Polyester filter with ring Ø340	FA034P
14	Nylon filter	FINY334AT
15	Y coupling inlet Ø48	ACMD048/C
16	Polyester bag	FI004P

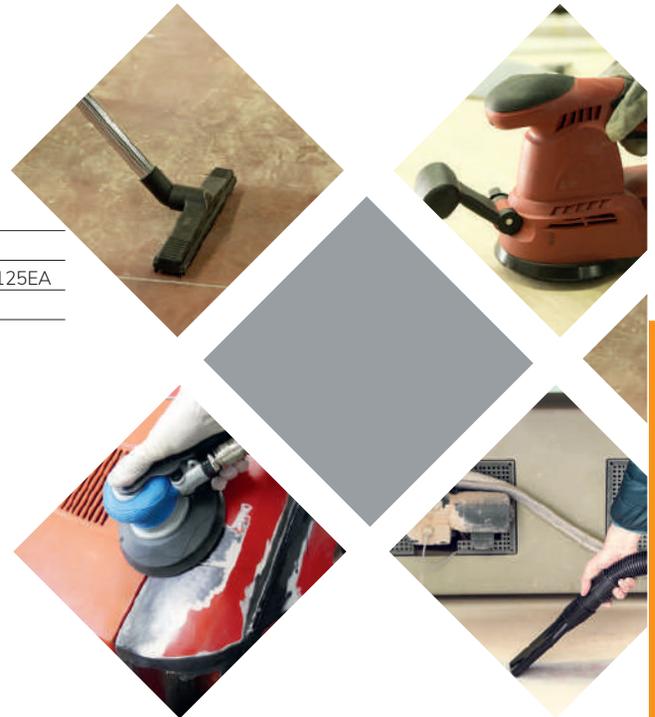

ASPIRATORI INDUSTRIALI



# HEKA

HEKA è stato creato per un uso professionale e industriale, dove c'è bisogno della massima filtrazione. Infatti, queste macchine sono adatte ad aspirare e filtrare tutte le microparticelle di polvere, incluse polveri tossiche e cancerogene (ad esempio, le polveri di amianto). L'avvio e l'arresto automatici sono controllati tramite l'utensile collegato.

HEKA are studied for industrial and professional use where the maximum filtration is needed. In fact, these machines are suitable to pick up and filter all small dust particles including hazardous and pathogenic dusts. The automatic start and stop system is controlled by the connected tool.



Motore  
Motor



Polvere  
Dry

## FILTRATION



ASPIRATORI INDUSTRIALI



- ◆ BL125EHS
- ◆ BL125EAHS

Number motors	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	1400
P max Tool (W)	Potenza max utensile(W)	2000
Pressure min-max (bar)	Pressione min-max (bar)	4-15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	215
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37
Weight (Kg)	Peso (Kg)	12,8



40 x 40 x 59 H cm  
40 x 40 x 77 H cm

- ◆ E for electric tool
- ◆ EA for electric and pneumatic tool


### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN for BL110EH - BL125EH
2	Flexible whit pneumatic hose Ø28 - 4,5mt	ACTF028P4,5CN for BL110EAH - BL125EAH
3	Conic cartridge H14 filter Ø202 - H170	FI202170HL
4	Polyester filter with ring Ø340	FA034P
5	Polyester bag	FI003P (only for BL110EHS - BL110EAHS)
6	Reinforced paper bag 37lt	FI006C (only for BL125EHS - BL125EAHS)

### Options

KIT040N [ 7 - 8 - 9 - 10 - 11 - 12 - 13 ]

	DESCRIPTION	CODE
7	Crevice tool Ø40	ACLP040
8	Chrome curved extension wand-male Ø40	ACTC038C
9	Chrome extension wand Ø40	ACTC038D
10	Dusting brush Ø40	ACPE040
11	Nozzle body A/P L300 Ø40	ACCS300A/P
12	Slide-on brush for floor nozzle L300	ACIP300
13	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
14	Tool tray 40x50cm	CMPU4050
15	Nylon filter	FINY334AT
16	Y coupling inlet Ø48	ACMD048/C

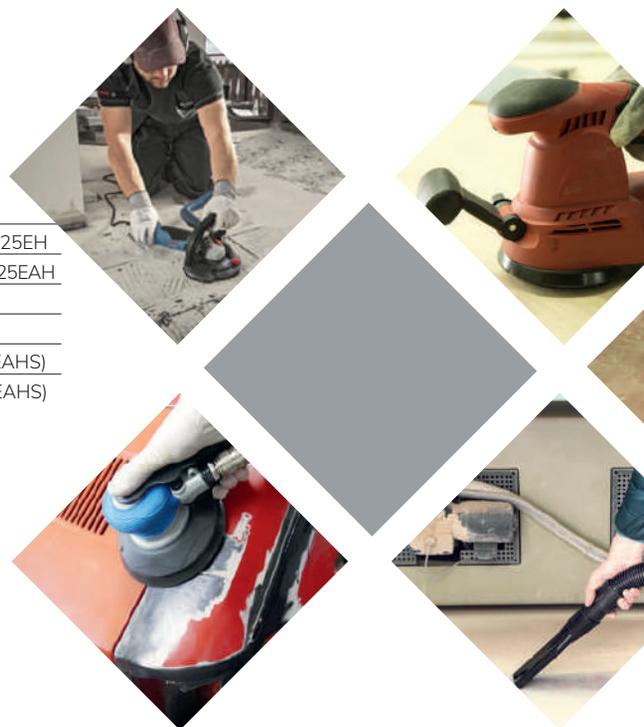

ASPIRATORI INDUSTRIALI



# MIZAR

MIZAR è l'aspirapolvere monofase industriale dal design innovativo e compatto. È fornito di fusto a distacco rapido, veloce da rimuovere e maneggevole, grazie alle solide ruote pivotanti. La solida struttura industriale comprende uno spazioso vano porta accessori, mentre sulla testata è montato un pratico vassoio. L'avvio automatico e lo scuotifiltro sono comandati direttamente dall'utensile collegato all'aspirapolvere. Grazie al potente motore bistadio da 1700W, MIZAR garantisce performance ottimali.

MIZAR is a compact single-phase industrial vacuum cleaner provided with a mobile dust tank, easy to remove and easy to handle thanks to its wheels. The tough structure includes a spacious accessory case, while a tool tray is mounted on the head. The automatic filter shaker are controlled by the connected power tool. Thanks to the 1700W-double stage motor, MIZAR grants optimal performances.



Motore  
Motor



Polvere  
Dry



ASPIRATORI INDUSTRIALI



		◆ BL175ES	◆ BL175AS	◆ BL175EAS
Number motors	Numero motori	1	1	1
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60	50/60
Cooling	Tipo raffreddamento	By pass	By pass	By pass
P max (W)	P max (W)	1700	1700	1700
P max Tool (W)	Potenza max utensile(W)	2000	-	2000
Pressure min-max (bar)	Pressione min-max (bar)	-	4-15	4-15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2600	2600	2600
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	230	230	230
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60	60	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	35	35	35
Weight (Kg)	Peso (Kg)	40,0	41,0	41,0



60 x 60 x 106 H cm

◆ E for electric tool

◆ A for pneumatic tool

◆ EA for electric and pneumatic tool


## Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN for BL175ES
2	Flexible whit pneumatic hose Ø28 - 4,5mt	ACTF028P4,5CN for BL175AS-BL175EAS
3	Conic cartridge H14 filter Ø202 - H170	FI202170HL
4	Tool tray 40x50cm	CMPU4050

## Options

KITV040 [ 5 - 11 ]

	DESCRIPTION	CODE
5	Crevice tool Ø40	ACLP040
6	Chrome curved extension wand-male Ø40	ACTC038C
7	Chrome extension wand Ø40	ACTC038D
8	Dusting brush Ø40	ACPE040
9	Nozzle body A/P L300 Ø40	ACCS300A/P
10	Slide-on brush for floor nozzle L300	ACIP300
11	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
12	Polyester filter with ring Ø340	FA034P
13	Nylon filter	FINY334AT
14	Y coupling inlet Ø48	ACMD048/C

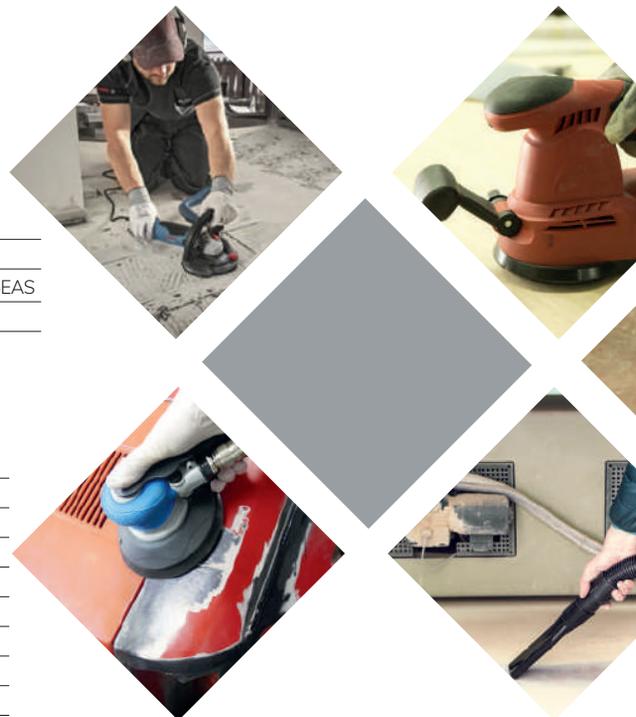

ASPIRATORI INDUSTRIALI



# TRANTOR

TRANTOR è un potente aspirapolvere a 2 motori, ideale per un utilizzo industriale e professionale in concomitanza con un utensile elettrico e/o pneumatico. Lo scuotifiltro automatico pulisce il filtro ogniqualvolta l'utensile collegato viene spento.

TRANTOR is a powerful and tough 2-motor vacuum cleaner for industrial and professional use with power tools. Its automatic filter shaker cleans the filter every time the tool is switched off.



ASPIRATORI INDUSTRIALI



		◆ BL250E	◆ BL250A	◆ BL250EA
Number motors	Numero motori	2	2	2
Stage	Stadi motori	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60	50/60
Cooling	Tipo raffreddamento	By pass	By pass	By pass
P max (W)	P max (W)	2600	2600	2600
P max Tool (W)	Potenza max utensile (W)	1200	-	1200
Pressure min-max (bar)	Pressione min-max (bar)	-	4-15	4-15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	430	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	76	76	76
Weight (Kg)	Peso (Kg)	27,5	27,5	27,5



60 x 60 x 106 H cm

- ◆ E for electric tool
- ◆ A for pneumatic tool
- ◆ EA for electric and pneumatic tool


### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 3,3mt Ø28 complete	ACTF028/3,3/CN for BL250E
2	Flexible whit pneumatic hose Ø28 - 4,5mt	ACTF028P4,5CN for BL250A - BL250EA
3	Cartridge HEPA filter Ø250 - H178	FI250178HL

### Options

KITW040B [ 4 - 10 ]

	DESCRIPTION	CODE
4	Crevice tool Ø40	ACLP040
5	Chrome curved extension wand-male Ø40	ACTC038C
6	Chrome extension wand Ø40	ACTC038D
7	Dusting brush Ø40	ACPE040
8	Nozzle body A/P L400 Ø40	ACCS400A/P
9	Slide-on brush for floor nozzle L400	ACIP400
10	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
11	Tool tray 48x60cm	CMPU4860
12	Polyester filter with ring Ø440	FA044P
13	Nylon filter	FINY440AT
14	Y coupling inlet Ø48	ACMD048/C
15	Double pneumatic output	CMKP014
16	Accessory basket L460 - Botton	ACCE460

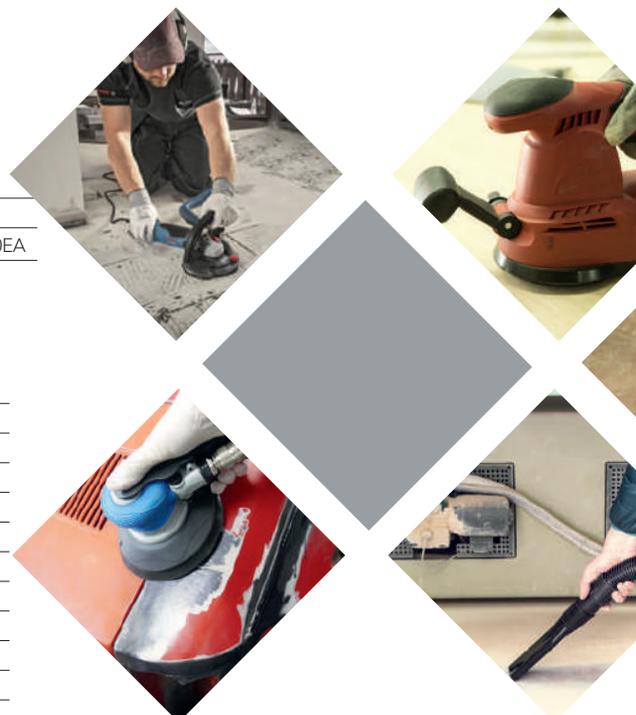

ASPIRATORI INDUSTRIALI



# CHRONO

CHRONO è la nostra nuova sanding station fornita di 2 motori d'aspirazione, con o senza scuotifiltro e con avviamento automatico all'utensile. Può anche essere utilizzata con due utensili differenti in simultanea, creando due postazioni di lavoro separate e contemporanee.

CHRONO is our new mobile sanding station provided with a 2 motors vacuum cleaner, with or without filter shaker and with automatic start. It can be used with 2 different tools at the same time.



2  
Motori  
Motors



Polvere  
Dry



Acqua  
Wet



ASPIRATORI INDUSTRIALI



		BL250SS	BL250SSV
Number motors	Numero motori	2	2
Stage	Stadi motori	double	double
Volt (V)	Volt (V)	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60
Cooling	Tipo raffreddamento	By pass	By pass
P max (W)	P max (W)	2600	2600
P max Tool (W)	Potenza max utensile(W)	1200	1200
Pressure min-max (bar)	Pressione min-max (bar)	4-15	4-15
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	430
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77	77
Filter shaker	Scuotifiltro	NO	YES
Weight (Kg)	Peso (Kg)	48 kg	49 kg



60 x 60 x 106 H cm

◆ EA for electric and pneumatic tool


### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose 5,0mt Ø28 complete	ACTF028/5/CN
2	Flexible whit pneumatic hose Ø28 - 5,0mt	ACTF028P5CN
3	Y Coupling inlet Ø48	ACMD048/C
4	Polyester filter with ring Ø440	FA044P for BL250SS
5	Polyester bag 77 lt Max 2 mot	FI005PT for BL250SS - BL250SSV
6	Cartridge HEPA filter Ø250 - H178	FI250178HL for BL250SSV
7	Nylon filter Ø440	FINY440AT for BL250SS
8	Sponge filter for liquids	ACCA165A for BL250SS

### Options

KITW040B [ 9 - 15 ]

	DESCRIPTION	CODE
9	Crevice tool Ø40	ACLPO40
10	Chrome curved extension wand-male Ø40	ACTC038C
11	Chrome extension wand Ø40	ACTC038D
12	Dusting brush Ø40	ACPE040
13	Nozzle body A/P L400 Ø40	ACCS400A/P
14	Slide-on brush for floor nozzle L400	ACIP400
15	Complete flexible hose mt. 2,5 Ø40	ACTF38/2,5/CN
16	Spring rod	CMAS008

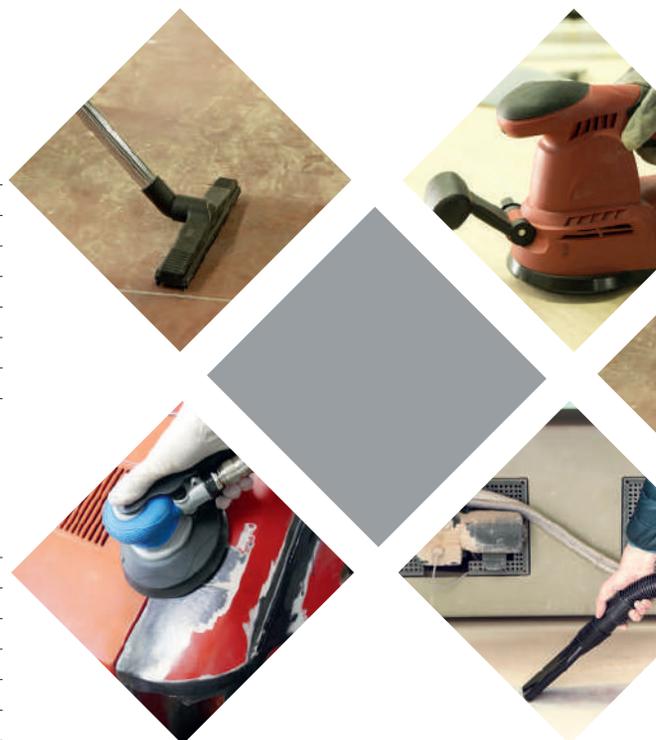

ASPIRATORI INDUSTRIALI



# HAMIANTUS 20

HAMIANTUS 20 LT ha un potente motore da 1150W e un serbatoio di recupero resistente agli impatti da 21 litri. La potente aspirazione dell'Hamiantus insieme alle caratteristiche che rispettano la normativa europea per le apparecchiature in CLASSE H offrono la massima rimozione dello sporco e al contempo salvano vite dalle malattie fatali provocate dalla polvere.

Grazie ai 4 livelli di filtrazione, ai cappucci di sicurezza e all'allarme sonoro e visivo, tutti i lavoratori saranno sempre al sicuro da eventuali perdite di polvere.

HAMIANTUS 20 LT has a powerful 1150W motor, a 21 Litre IMPACT resistant collection tank. The powerful suction of the E2H100P along with the features that respect the European regulation for H CLASS equipment, give you maximum dirt removal whilst saving lives from fatal dust inflicted diseases. Thanks to the 4 filtration levels, to the safety caps and to the sonorous & visual alarm, all workers will always be safe from any possible dust leak.

Finally, this vacuum cleaner could be equipped with an useful blower, allowing further applications (optional).



Motore  
Motor



Polvere  
Dry



ASPIRATORI INDUSTRIALI



		E2H100S	E2H100P
Number motors	Numero motori	1	1
Stage	Stadi motori	single	single
Volt (V)	Volt (V)	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60
Cooling	Tipo raffreddamento	Thru flow	Thru flow
P max (W)	P max (W)	1150	1150
P max Tool (W)	Potenza max utensile(W)	1000	1000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1350	1350
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	220	220
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	58	58
Total tank capacity (lt)	Capacità tot. fusto (lt)	21	21
Weight (Kg)	Peso (Kg)	9,3	9,3



40 x 40 x 59 H cm

### Standard Accessories and Filters

KD036W [ 1 - 2 - 3 - 4 - 5 - 6 ]

	DESCRIPTION	CODE
1	Flexible hose 2,0mt Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome extension wand Ø36	ACTC036
5	Steel combined nozzle Ø36	ACSP036
6	Dusting brush Ø36	ACPE036
7	Polyester filter with ring Ø34	FA034P
8	Polyester bag	FI003PN
9	ULPA Cartridge Filter Ø190 H155	FI190155U15

### Options

	DESCRIPTION	CODE
10	Soft brush L 120mm Ø36	ACSP120/36



ASPIRATORI INDUSTRIALI



# HAMIANTUS 37

HAMIANTUS 37 LT ha un potente motore da 1150W e un serbatoio di recupero resistente agli impatti da 37 litri. La potente aspirazione dell'Hamiantus insieme alle caratteristiche che rispettano la normativa europea per le apparecchiature in CLASSE H offrono la massima rimozione dello sporco e al contempo salvano vite dalle malattie fatali provocate dalla polvere.

Grazie ai 4 livelli di filtrazione, ai cappucci di sicurezza e all'allarme sonoro e visivo, tutti i lavoratori saranno sempre al sicuro da eventuali perdite di polvere.

HAMIANTUS 37 LT has a powerful 1150W motor, a 37 Litre IMPACT resistant collection tank. The powerful suction of the E2H100P37 along with the features that respect the European regulation for H CLASS equipment, give you maximum dirt removal whilst saving lives from fatal dust inflicted diseases. Thanks to the 4 filtration levels, to the safety caps and to the sonorous & visual alarm, all workers will always be safe from any possible dust leak.

Finally, this vacuum cleaner could be equipped with an useful blower, allowing further applications (optional).



Motore  
Motor

1



Polvere  
Dry



ASPIRATORI INDUSTRIALI



		<b>E2H100P37</b>	<b>E2H100S37</b>
Number motors	Numero motori	1	1
Stage	Stadi motori	single	single
Volt (V)	Volt (V)	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60
Cooling	Tipo raffreddamento	Thru flow	Thru flow
P max (W)	P max (W)	1150	1150
P max Tool (W)	Potenza max utensile(W)	1000	1000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1350	1350
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	220	220
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	58	58
Total tank capacity (lt)	Capacità tot. fusto (lt)	37	37
Weight (Kg)	Peso (Kg)	12	12



40 x 40 x 77 H cm

### Standard Accessories and Filters

KD036W [ 1 - 2 - 3 - 4 - 5 - 6 ]

	<b>DESCRIPTION</b>	<b>CODE</b>
1	Flexible hose 2,0mt Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLPO36
4	Chrome extension wand Ø36	ACTC036
5	Steel combined nozzle Ø36	ACSP036
6	Dusting brush Ø36	ACPE036
7	Polyester filter with ring Ø36	FA034P
8	Polyester bag 37lt	FI004P
9	ULPA Cartridge Filter Ø190 H155	FI190155U15

### Options

	<b>DESCRIPTION</b>	<b>CODE</b>
10	Soft brush L 120mm Ø36	ACSP120/36



ASPIRATORI INDUSTRIALI



# HAMIANTUS 50

HAMIANTUS 50 LT ha un potente motore da 1150W e un serbatoio di recupero resistente agli impatti da 50 litri. La potente aspirazione dell'Hamiantus insieme alle caratteristiche che rispettano la normativa europea per le apparecchiature in CLASSE H offrono la massima rimozione dello sporco e al contempo salvano vite dalle malattie fatali provocate dalla polvere.

Grazie ai 4 livelli di filtrazione, ai cappucci di sicurezza e all'allarme sonoro e visivo, tutti i lavoratori saranno sempre al sicuro da eventuali perdite di polvere.

HAMIANTUS 50 LT has a powerful 1150W motor, a 50 Litre IMPACT resistant collection tank. The powerful suction of the E2H100S50 along with the features that respect the European regulation for H CLASS equipment, give you maximum dirt removal whilst saving lives from fatal dust inflicted diseases. Thanks to the 4 filtration levels, to the safety caps and to the sonorous & visual alarm, all workers will always be safe from any possible dust leak.

Finally, this vacuum cleaner could be equipped with an useful blower, allowing further applications (optional).



Motore  
Motor

1



Polvere  
Dry



E2H100S50		
Number motors	Numero motori	1
Stage	Stadi motori	single
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	Thru flow
P max (W)	P max (W)	1150
P max Tool (W)	Potenza max utensile(W)	1000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	1350
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	220
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	58
Total tank capacity (lt)	Capacità tot. fusto (lt)	50
Weight (Kg)	Peso (Kg)	14,0



47 x 47 x 85 H cm

### Standard Accessories and Filters

KD036W [ 1 - 2 - 3 - 4 - 5 - 6 ]

	DESCRIPTION	CODE
1	Flexible hose 2,0mt Ø36	ACTF036/2/CIN
2	Little nozzle Ø36	ACBO036
3	Crevice tool Ø36	ACLP036
4	Chrome extension wand Ø36	ACTC036
5	Steel combined nozzle Ø36	ACSP036
6	Dusting brush Ø36	ACPE036
7	Polyester filter with ring Ø37	FA037P
8	Polyester bag	FI005P
9	ULPA Cartridge Filter Ø190 H155	FI190155U15

### Options

	DESCRIPTION	CODE
10	Soft brush L 120mm Ø36	ACSP120/36



ASPIRATORI INDUSTRIALI



# HAMIANTUS 77

HAMIANTUS 77 LT ha due potenti motori bistadio e un serbatoio di recupero resistente agli impatti da 77 litri. La potente aspirazione dell'Hamiantus insieme alle caratteristiche che rispettano la normativa europea per le apparecchiature in CLASSE H offrono la massima rimozione dello sporco e al contempo salvano vite dalle malattie fatali provocate dalla polvere. Grazie ai molteplici livelli di filtrazione e all'allarme sonoro e visivo, tutti i lavoratori saranno sempre al sicuro da eventuali perdite di polvere.

HAMIANTUS 77 LT has a two powerful double stage motors, a 77 Litre IMPACT resistant collection tank. The powerful suction of this model along with the features that respect the European regulation for H CLASS equipment, give you maximum dirt removal whilst saving lives from fatal dust inflicted diseases. Thanks to the more filtration levels, to the safety caps and to the sonorous & visual alarm, all workers will always be safe from any possible dust leak. Finally, this vacuum cleaner could be equipped with an useful blower, allowing further applications (optional).



Motori  
Motors



Polvere  
Dry



ASPIRATORI INDUSTRIALI



**E2H220MP  
E2H220MS**

Motors number	Numero motori	2
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	2400
P (W)	Potenza (W)	2050
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2250
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	340
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	76/77
Weight (Kg)	Peso (Kg)	23,0/24,0



47 x 47 x 85 H cm

**Standard Accessories and Filters**

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-made Ø40	ACTC038C
5	Nozzle body A/P L400 Ø40	ACCS400A/P
6	Slide-on brush for floor nozzle L400	ACIP400
7	Dusting brush Ø40	ACPE040
8	ULPA cartridge filter Ø250 H178	FI250178U15
9	Polyester filter with ring Ø44	FA044P
10	Polyester bag	FI005P



ASPIRATORI INDUSTRIALI



# TITANUS P37

TITANUS P37 fornito di un potente motore bistadio da 1400W, permette di aspirare agevolmente detriti voluminosi e scarti di lavorazione industriale. Il sistema filtrante è protetto da un flusso ciclonico grazie anche al bocchettone tangenziale in Ø50mm. Il filtro è al riparo dall'urto dei materiali aspirati.

TITANUS P37, provided with 1 powerful motor 1400W, allows a comfortable suction of a ll voluminous waste deriving from industrial manufacturing. The filter is protected by a cyclone flow and, thanks to the side inlet, the filter will not be damaged by the shavings.



Motore  
Motor



Polvere  
Dry



Acqua  
Wet



Usò industriale  
Industrial use



ASPIRATORI INDUSTRIALI



**E2125PPT**

Motors number	Numero motori	1
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	1400
P (W)	Potenza (W)	1200
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2500
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	220
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	60
Total tank capacity (lt)	Capacità tot. fusto (lt)	37
Weight (kg)	Peso (kg)	13,7

**Standard Accessories and Filters**

	DESCRIPTION	CODE
1	Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
2	Crevice tool Ø40	ACLP040
3	Chrome extension wand Ø40	ACTC038D
4	Chrome curved extension wand-male Ø40	ACTC038C
5	Nozzle body A/P L300 Ø40	ACCS300A/P
6	Slide-on for liquids nozzle L300	ACIL300
7	Slide-on brush for floor nozzle L300	ACIP300
8	Dusting brush Ø40	ACPE040
9	Cartridge filter Ø175 - H140 polyester	FI175140P
10	Sponge filter for liquids	ACCA165A

**Options**

	DESCRIPTION	CODE
11	Slide-on for carpet nozzle L300	ACIT300
12	Metal Crevice tool Ø38	ACLP038CR
13	Complete flexible hose mt.2,5 Ø50	ACTF50CT
14	Crevice tool Ø50	ACLP050
15	Chrome curved extension wand Ø50	ACTS050
16	Triangle Nozzle Ø50	ACBO050T
17	Nozzle body A/P L300 Ø50	ACCS40050DAV
18	Slide-on for liquids nozzle L400	ACIL400DAV
19	Slide-on brush for floor nozzle L400	ACIP400DAV
20	Dusting brush Ø50	ACPE050



# TITANUS P77

TITANUS P77 fornito di due potenti motori bistadio da 1400W, permette di aspirare agevolmente detriti voluminosi e scarti di lavorazione industriale. Il sistema filtrante è protetto da un flusso ciclonico grazie anche al bocchettone tangenziale in Ø50mm. Il filtro è al riparo dall'urto dei materiali aspirati.

TITANUS P77, provided with 2 powerful motors of 1400W each, allows a comfortable suction of all voluminous waste deriving from industrial manufacturing. The filter is protected by a cyclone flow and, thanks to the side inlet, the filter will not be damaged by the shavings.



Motori  
Motors



Polvere  
Dry



Acqua  
Wet



Usò industriale  
Industrial use

ASPIRATORI INDUSTRIALI



### E2250MPT

Motors number	Numero motori	2
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	by pass
P max (W)	P max (W)	2600
P (W)	Potenza (W)	2300
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2500
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	450
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	77
Weight (kg)	Peso (kg)	24,0



### Standard Accessories and Filters

DESCRIPTION	CODE
1 Complete flexible hose mt.2,5 Ø50	ACTF50CT
2 Crevice tool Ø50	ACLP050
3 Chrome curved extension wand Ø50	ACTS050
4 Triangle Nozzle Ø50	ACBO050T
5 Nozzle body A/P L300 Ø50	ACCS40050DAV
6 Slide-on for liquids nozzle L400	ACIL400DAV
7 Slide-on brush for floor nozzle L400	ACIP400DAV
8 Dusting brush Ø50	ACPE050
9 Cartridge filter Ø250 - H178 polyester	FI250178P
10 Sponge filter for liquids	ACCA165A

### Options

DESCRIPTION	CODE
11 Complete flexible hose mt.2,5 Ø40	ACTF38/2,5/CN
12 Crevice tool Ø40	ACLP040
13 Chrome extension wand Ø40	ACTC038D
14 Chrome curved extension wand-male Ø40	ACTC038C
15 Nozzle body A/P L400 Ø40	ACCS400A/P
16 Slide-on for liquids nozzle L400	ACIL400
17 Slide-on brush for floor nozzle L400	ACIP400
18 Dusting brush Ø40	ACPE040
19 Slide-on for carpet nozzle L400	ACIT400
20 Metal Crevice tool Ø38	ACLP038CR



# TITANUS

TITANUS fornito di 3 potenti motori, permette di aspirare agevolmente oli esausti, vetro, trucioli di legno o metallo e qualsiasi scarto di lavorazione industriale. Il sistema filtrante è protetto da un ciclone metallico e, grazie anche al bocchettone tangenziale, il filtro è al riparo dall'urto con i trucioli aspirati. Infine, il separatore (opzionale) permette di aumentare il volume della macchina e di separare i liquidi aspirati dai trucioli.

TITANUS, provided with 3 powerful motors, allows a comfortable suction of oil, shavings and all kinds of waste deriving from industrial manufacturing. The filter is protected by a metal cyclone and, thanks to the side inlet, the filter will not be damaged by the shavings.



Motori  
Motors



Polvere  
Dry



Acqua  
Wet



Uso industriale  
Industrial use

ASPIRATORI INDUSTRIALI



BL375T		
Number motors	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	3600
P (W)	Potenza (W)	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	76
Weight (Kg)	Peso (Kg)	29,8



60 x 60 x 106 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Cartridge filter Ø250 - H178 HEPA	FI250178HL
2	Sponge filter for liquids	ACCA165A
3	Metal Cyclone Ø300	CMCI300N

### Options


KITVEWI375TN [ 4 - 11 ]

	DESCRIPTION	CODE
4	Complete flexible hose mt. 2,5 Ø50	ACTF50CN
5	Crevice tool Ø50	ACLP050
6	Chrome extension wand Ø50	ACTS050
7	Triangle nozzle Ø50	ACBO050T
8	Nozzle body A/P L400 Ø50	ACCS40050DAV
9	Slide-on for liquids nozzle L400	ACIL400DAV
10	Slide-on brush for floor nozzle L400	ACIP400DAV
11	Dusting brush Ø50	ACPE050

### Options

KITVEWI375TPN [ 12- 17 ]

	DESCRIPTION	CODE
12	Antistatic flexible hose complete mt 2,5 - Ø50	ACTF50PUCN
13	Antistatic conic crevice tool Ø50	ACLC050A
14	Antistatic corrugated squeegee Ø50	ACVO050A
15	Antistatic conic accessory Ø50	ACTCO50A
16	Zinc plated crevice tool L500mm Ø50	ACLA050Z
17	Zinc plated coupling for accessories Ø50	ACMG050Z
18	Complete squeegee tool	ACVF060PCM/CMA XN
19	Accessory basket L460 botton	ACCE460

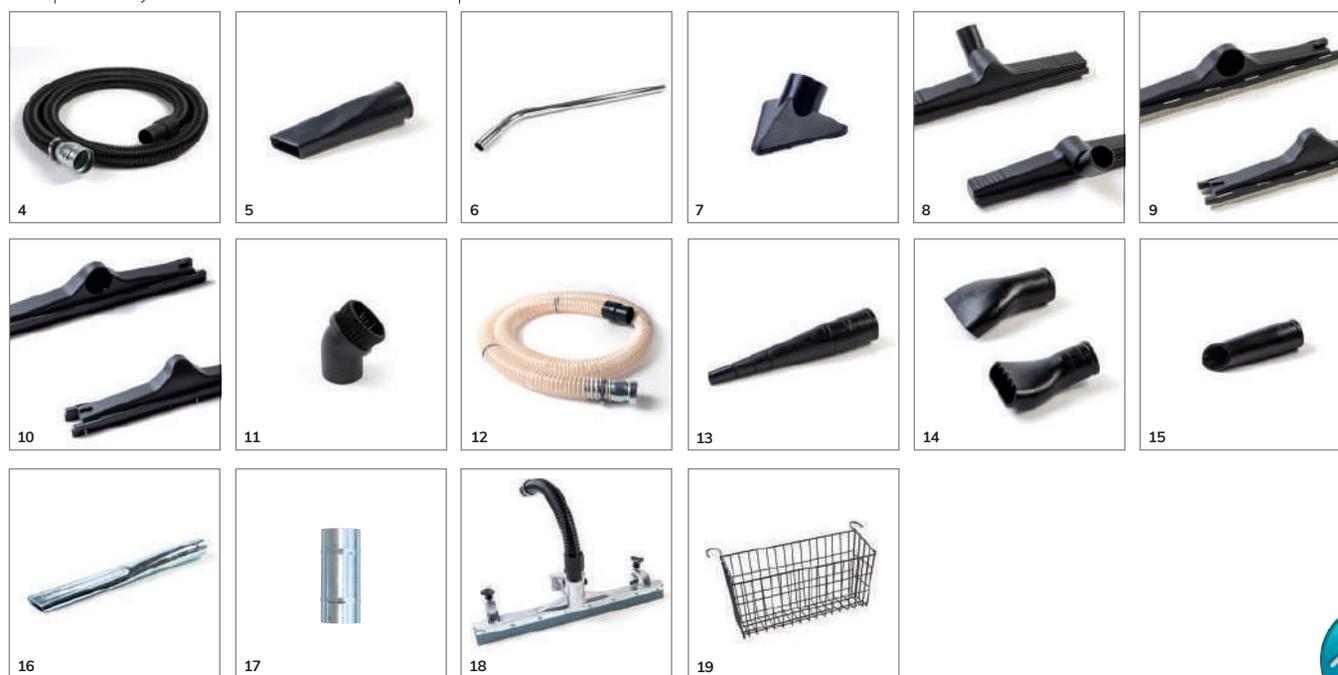

ASPIRATORI INDUSTRIALI



# ANTARES

ANTARES dotato di 3 potenti motori, permette di aspirare comodamente olio, trucioli e qualsiasi tipo di rifiuto derivante dalla lavorazione industriale. Il filtro è protetto da un ciclone metallico e, grazie al bocchettone tangenziale, il filtro non verrà danneggiato dai trucioli. Inoltre, il separatore permette di tenere separati trucioli e oli e aumenta la capacità della macchina.

ANTARES, provided with 3 powerful motors, allows a comfortable suction of oil, shavings and all kinds of waste deriving from industrial manufacturing. The filter is protected by a metal cyclone and, thanks to the side inlet, the filter will not be damaged by the shavings. Moreover, the separator allows to keep the shavings away from the oils and increases the capacity of the machine.



Motori  
Motors



Polvere  
Dry



Acqua  
Wet



Uso industriale  
Industrial use

ASPIRATORI INDUSTRIALI



BL375K		
Number motors	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	3600
P (W)	Potenza (W)	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	95
Weight (Kg)	Peso (Kg)	34,5



60 x 60 x 135 H cm

### Standard Accessories and Filters

DESCRIPTION	CODE
1 Cartridge filter Ø250 - H178 HEPA	FI250178HL
2 Sponge filter for liquids	ACCA165A
3 Metal Cyclone Ø300	CMCI300N

### Options

KITVEWI375TN [ 4 - 11 ]

DESCRIPTION	CODE
4 Complete flexible hose mt. 2,5 Ø50	ACTF50CN
5 Crevice tool Ø50	ACLP050
6 Chrome extension wand Ø50	ACTS050
7 Triangle nozzle Ø50	ACBO050T
8 Nozzle body A/P L400 Ø50	ACCS40050DAV
9 Slide-on for liquids nozzle L400	ACIL400DAV
10 Slide-on brush for floor nozzle L400	ACIP400DAV
11 Dusting brush Ø50	ACPE050


### Options

KITVEWI375TPN [ 12- 17 ]

DESCRIPTION	CODE
12 Antistatic flexible hose complete mt 2,5 - Ø50	ACTF50PUCN
13 Antistatic conic crevice tool Ø50	ACLC050A
14 Antistatic corrugated squeegee Ø50	ACVO050A
15 Antistatic conic accessory Ø50	ACTCO50A
16 Zinc plated crevice tool L500mm Ø50	ACLA050Z
17 Zinc plated coupling for accessories Ø50	ACMG050Z
18 Complete squeegee tool	ACVF060PCM/CMA XN
19 Accessory basket L460 botton	ACCE460



ASPIRATORI INDUSTRIALI

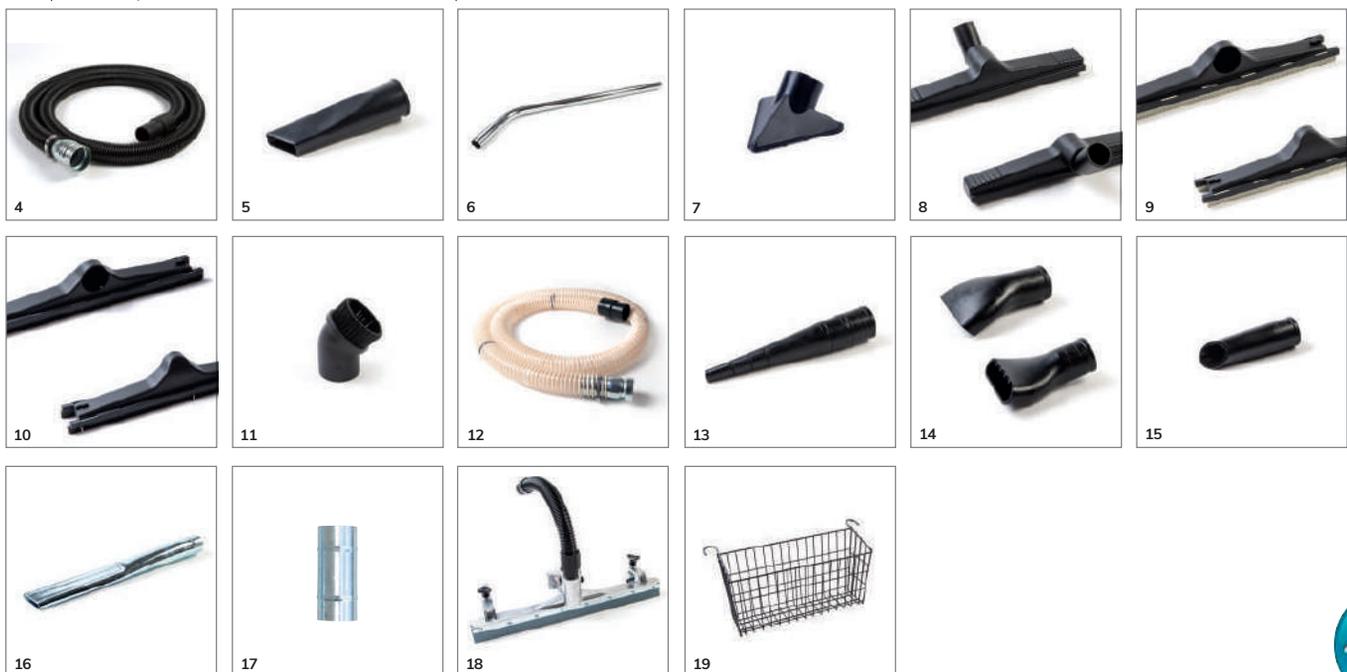

# POWER LEAF

POWER LEAF è un aspiratore polvere e liquidi con tre motori bistadio e P max 3600W. La macchina è dotata di un kit di aspirazione di Ø90mm per detriti voluminosi come foglie o frammenti/scarti di tessuti. Il serbatoio in inox 304 da 100lt è completato da un carrello in metallo da cantiere.

Vacuum cleaner with three double stage motors that reach 3600W maximum power. The machine is equipped with a Ø100mm suction kit for voluminous debris such as leaves and material shreds, with a stainless steel recovery tank of 100lt capacity and with a metal trolley with tipping tank for an easy emptying of the debris.

Power  
Leaf 



ASPIRATORI INDUSTRIALI



BL375PL		
Number motors	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	3600
P (W)	Potenza (W)	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	100
Weight (Kg)	Peso (Kg)	36



60 x 60 x 130 H cm

### Standard Accessories and Filters

KIT [ 1 - 2 - 3 ]

	DESCRIPTION	CODE
1	Flexible hose 4mt Ø90mm	ACTF5090C
2	Main hose with handle Ø90mm	ACTR090CI
3	Terminal hose Ø90mm L70mm	ACTR9045
4	Polyester Cartridge filter Ø250 - H178	FI250178P

### Options

KITVEWI375TN [ 4 - 11 ]

	DESCRIPTION	CODE
5	Complete flexible hose mt. 2,5 Ø50	ACTF50CN
6	Crevice tool Ø50	ACLPO50
7	Chrome extension wand Ø50	ACTS050
8	Triangle nozzle Ø50	ACBO050T
9	Nozzle body A/P L400 Ø50	ACCS40050DAV
10	Slide-on for liquids nozzle L400	ACIL400DAV
11	Slide-on brush for floor nozzle L400	ACIP400DAV
12	Dusting brush Ø50	ACPE050
13	Accessory basket L460 botton	ACCE460



ASPIRATORI INDUSTRIALI



# ERCULES

ERCULES dotato di 3 potenti motori b i stadio con P max 3600W, permette l'aspirazione di g randi q uantità d i polveri e/o liquidi. Il contenitore d i raccolta è u n classico f usto da 200lt da cantiere o da officina meccanica, dotato di tubo per visualizzare il livello liquidi e di un rubinetto per lo scarico. E' possibile fornire solo la parte aspirante con coperchio e relativi accessori per chi possiede già il contenitore. La struttura con ruote dotate di freno consente anche il basculamento per lo scarico dei materiali aspirati.

ERCULES i s a vacuum cleaner equipped w ith 3 p owerful double stage motors that reach 3600W maximum power and allow the suction of huge quantities of dusts and/or liquids. The machine comes with a 200lt tank and it is provided with a tube to check the liquids level and with a draining tap. For those who already have the tank, it is possible to supply only the suction part with the cover and the respective accessories. The structure provided with wheels and brake allows the tipping of the tank for an easy emptying of the waste.



ASPIRATORI INDUSTRIALI



**ERE2375**

Number motors	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	3600
P (W)	Potenza (W)	3150
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	200
Weight (Kg)	Peso (Kg)	58



73 x 65 x 140 H cm

**Standard Accessories and Filters**

	DESCRIPTION	CODE
1	Polyester Cartridge filter Ø250 - H178	FI250178P
2	Sponge filter for liquids	ACCA165A

**Options**

	DESCRIPTION	CODE
3	Complete flexible hose mt.2,5 Ø50	ACTF50ERC
4	Crevice tool Ø50	ACLP050
5	Chrome curved extension wand Ø50	ACTS050
6	Triangle Nozzle Ø50	ACBO050T
7	Nozzle body A/P LA00 Ø50	ACCS40050DAV
8	Slide-on for liquids nozzle L400	ACIL400DAV
9	Slide-on brush for floor nozzle L400	ACIP400DAV
10	Dusting brush Ø50	ACPE050
11	Antistatic flexible hose complete mt 2,5 Ø50	ACTF50PUERC
12	Antistatic conic accessory Ø50	ACLC050A
13	Antistatic corrugated squeegee Ø50	ACVO050A
14	Antistatic conic accessory Ø50	ACTC050A
15	Zinc plated coupling for accessories Ø50	ACLA050Z
16	Zinc plated coupling for accessories Ø50	ACMG050Z



ASPIRATORI INDUSTRIALI



# VEGA

VEGA è il nostro robusto aspiratore monofase fornito di fusto a distacco rapido, veloce da rimuovere e maneggevole, grazie alle sue ruote pivotanti. La solida struttura industriale comprende uno spazioso vano porta accessori. È fornito di 2 o 3 motori, con o senza scuotifiltro. Grazie all'estesa superficie filtrante e allo scuotifiltro, VEGA garantisce performance elevate. Il vacuometro posto sulla testata mostra quando il filtro è sporco.

VEGA is a solid single-phase industrial vacuum cleaner provided with a mobile dust tank, easy to remove and easy to handle thanks to its wheels. The tough structure includes a spacious accessory case. It is provided with 2 or 3 motors, with or without filter shaker. Thanks to the extended filtering surface and to its filter shaker, it grants very high performances. The vacuum gauge on the head shows when the filter is dirty.



2  
Motori  
Motors



3  
Motori  
Motors



Polvere  
Dry



Uso  
industriale  
Industrial use

ASPIRATORI INDUSTRIALI



		BL250	BL375	BL250V	BL375V
Number motors	Numero motori	2	3	2	3
Stage	Stadi motori	double	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240
Frequency (Hz)	Frequenza (Hz)	50/60	50/60	50/60	50/60
Cooling	Tipo raffreddamento	By pass	By pass	By pass	By pass
P max (W)	P max (W)	2600	3600	2600	3600
P (W)	Potenza (W)	2300	3150	2300	3150
Filter shaker	Scuotifiltro	NO	NO	<b>YES</b>	<b>YES</b>
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400	2400	2400	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	430	645	430	645
Total filtering surface (cm <sup>2</sup> )	Superficie filtrante (cm <sup>2</sup> )	13000	13000	13000	13000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68	68	68	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	80	80	80	80
Weight (Kg)	Peso (Kg)	45	47	46	48



60 x 90 x 140 H cm

### Standard Accessories and Filters

DESCRIPTION	CODE
1 Cartridge filter H14 Ø250 - H260 washable	FI250260HL

### Options

KIT40FOVN [ 2-8 ]

DESCRIPTION	CODE
2 Complete flexible hose mt. 5 Ø40	ACTF385VN
3 Crevice tool Ø40	ACLP040
4 Dusting brush Ø40	ACPE040
5 Nozzle body A/P L400 Ø40	ACCS400A/P
6 Slide-on for floor nozzle L400	ACIP400
7 Chrome extension wand Ø40	ACTC038D
8 Chrome curved extension wand male Ø40	ACTC038C

### Options

KIT50FOVN [ 9-15 ]

DESCRIPTION	CODE
9 Complete flexible hose Ø50	ACTF50C5VN
10 Crevice tool Ø50	ACLP050
11 Chrome curved extension wand male Ø50	ACTS050
12 Triangle nozzle Ø50	ACBO050T
13 Nozzle body A/P L400 Ø50	ACCS40050DAV
14 Slide-on for floor nozzle L400	ACIP400DAV
15 Dusting brush Ø50	ACPE050



ASPIRATORI INDUSTRIALI



# LUXOR

LUXOR: Aspiratore Industriale VERTICALE trifase da 3kW dotato di scuotifiltro manuale nella versione TU e scuotifiltro automatico nella versione TUV. LUXOR TUV è inoltre provvisto di un sistema filtrante con filtro a cartuccia primario di ultima generazione ad alta superficie filtrante con laminazione PTFE (ed elevata capacità di rilascio residui) e filtro supplementare HEPA - H14. LUXOR è la macchina ideale per l'aspirazione di polveri fini e umide.

LUXOR: Three phase Industrial vertical vacuum cleaner fitted out with a manual filter shaker in the TU version and an automatic filter shaker in the TUV version. LUXOR TUV is supplied with a filtration system with a state-of-the-art main cartridge filter with PTFE treatment and an extra HEPA - H14 cartridge filter which grant high filtering surface and high ability to release waste. LUXOR is fit to vacuum any fine and humid dust without any loss of performance.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



BL375TU



BL375TUV



ASPIRATORI INDUSTRIALI



		BL375TU	BL375TUV
Number motors	Numero motori	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz
Stage	Stadi motori	single	single
P max (kW)	P max (kW)	3,0 threephase	3,0 threephase
IP Protection	Protezione IP	54	54
Tank material	Materiale ccontentitore	inox 304	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	100	100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	330
Total filtering surface (cm <sup>2</sup> )	Superficie filtrante (cm <sup>2</sup> )	12000	2000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69
<b>Filter shaker</b>	<b>Scuotifiltro</b>	<b>manual</b>	<b>automatic</b>



90 x 65 x 170 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Polyester filter Ø460	FA046P6 per BL375TU
2	Cartridge filter H14 Ø370 - H305 washable	FI370305 per BL375UV

### Options

KIT40FOVN [ 2-8 ]

	DESCRIPTION	CODE
3	Complete flexible hose 5mt. Ø40	ACTF385VN
4	Crevice tool Ø40	ACLP040
5	Dusting brush Ø40	ACPE040
6	Nozzle body A/P L400 Ø40	ACCS400A/P
7	Slide-on for floor nozzle L400	ACIP400
8	Chrome extension wand Ø40	ACTC038D
9	Chrome curved extension wand male Ø40	ACTC038C

### Options

KIT50FOVN [ 9-15 ]

	DESCRIPTION	CODE
10	Complete flexible hose 5mt. Ø50	ACTF50C5VN
11	Crevice tool Ø50	ACLP050
12	Chrome curved extension wand male Ø50	ACTS050
13	Triangle nozzle Ø50	ACBO050T
14	Nozzle body A/P L400 Ø50	ACCS40050DAV
15	Slide-on for floor nozzle L400	ACIP400DAV
16	Dusting brush Ø50	ACPE050



ASPIRATORI INDUSTRIALI



# LUXOR ATEX

LUXOR ATEX è il nostro aspiratore trifase verticale industriale adatto per la zona ATEX EX 2-22. E' fornito di fusto di raccolta a distacco rapido, veloce da rimuovere e maneggevole grazie alle sue ruote pivotanti conduttive. La solida struttura industriale comprende un ampio spazio vano porta accessori. E' dotata di scuotifiltro manuale. Il Vacuometro ATEX posto sulla testata indica il livello di intasamento del filtro.

LUXOR ATEX is our vertical industrial three-phase vacuum cleaner for ATEX EX 2-22 zones. It is provided with a mobile dust tank easy to remove and easy to handle because of its conductive castor wheels. The tough structure includes a spacious accessory case. It is provided with a manual filter shaker. The ATEX vacuum gauge on the head shows when the filter is dirty.

 II 3G Ex nA IIC T4 Gc

 II 3D Ex tc IIIC 135°C Dc



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



ASPIRATORI INDUSTRIALI



		BL375TUATEX	BL220TUATEX
Number motors	Numero motori	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 230V-50Hz
Stage	Stadi motori	single	single
P max (kW)	P max (kW)	3,0 threephase	3,0 monophase
IP Protection	Protezione IP	54	54
Tank material	Materiale ccontentitore	inox 304	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	100	100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	330
Total filtering surface ( cm <sup>2</sup> )	Superficie filtrante ( cm <sup>2</sup> )	12000	12000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69
Filter shaker	Scuotifiltro	manual	manual



90 x 65 x 170 H cm

**Tutti gli accessori sono conduttivi**  
All accessories a conductive

### Standard Accessories and Filters

KITLA038CONN

	DESCRIPTION	CODE
1	Antistatic Polyester Filter Ø460	FA046P6A

### Options

KITLA038CONN [ 2 - 7 ]

	DESCRIPTION	CODE
2	Complete flexible hose 5mt Ø40 conductive	ACTF385VCONN
3	Metal crevice tool Ø40	ACLPO38CR
4	Conductive dusting Brush Ø40	ACPE040C
5	Industrial floor brush L 400 Ø38	ACSI400C38
6	Chrome curved extension wand male Ø38	ACTC038C
7	Chrome curved extension wand female Ø38	ACTC038CF


### Options

KITLA050CONN [ 8 - 13 ]

	DESCRIPTION	CODE
8	Complete flexible hose 5mt Ø50	ACTF505VCONN
9	Metal Crevice tool L 500 Ø50	ACLA050Z
10	Chrome "S" curved extension Ø50	ACTS050C
11	Dusting Brush Ø50	ACPE050C
12	Industrial floor brush L 400 Ø50	ACSI400C50



ASPIRATORI INDUSTRIALI

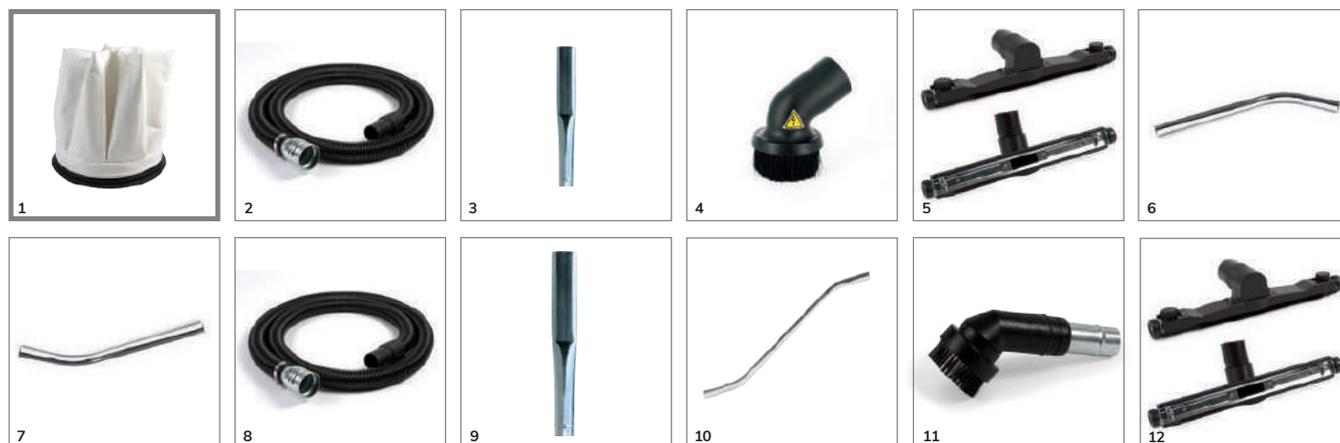

# ARGO SLIM

ARGO SLIM è il trifase compatto della nostra nuova gamma ALL BLACK. Può essere fornito di turbina da 3 o da 4kW a vista. La solida struttura industriale lascia la turbina a vista per una facilità di manutenzione e pulizia e per ridurre gli ingombri.

ARGO SLIM is the compact three-phase vacuum cleaner of our new ALL BLACK range. It can be provided with a 3kW or a 4kW turbine. The tough structure with visible turbine allows easy cleaning and maintenance and reduces the overall dimensions of the machine.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



		BL3100S	BL4100S	BL55100S
Number motors	Numero motori	1	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz	turbine 400V-50Hz
Stage	Stadi motori	single	double	double
P max (kW)	P max (kW)	3,0	4,0	5,5
IP Protection	Protezione IP	54	54	54
Tank material	Materiale contenitore	inox 304	inox 304	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	70	70	76
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	510	520
Total filtering surface (cm <sup>2</sup> )	Superficie filtrante (cm <sup>2</sup> )	10000	10000	10000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69	69
Filter shaker	Scuotifiltro	manual	manual	manual



60 x 100 x 100 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Complete flexible hose mt. 5 Ø40	ACTF385FN
2	Crevice tool Ø40	ACLP040
3	Dusting brush Ø40	ACPE040
4	Polyester filter Ø420	FA042P6

### Options

Accessories Ø40

	DESCRIPTION	CODE
5	Slide-on for floor nozzle L400	ACIP400
6	Slide-on for liquids nozzle L400	ACIL400
7	Chrome extension wand Ø40	ACTC038D
8	Chrome curved extension wand male Ø40	ACTC038C
9	Nozzle body A/P L400	ACCS400A/P



ASPIRATORI INDUSTRIALI



# ARGO VERTICAL

ARGO VERTICAL è il trifase compatto della nostra nuova gamma ALL BLACK. Può essere fornito di turbina da 3 o da 4Kw. La solida struttura industriale comprende un maniglione posteriore e le ruote anteriori con freno.

ARGO is the compact three-phase vacuum cleaner of our new ALL BLACK range. It can be provided with a 3kW or a 4kW Turbine. The tough structure includes a strong handle for moving and two front wheels with brake.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



		BL3077	BL4077
Number motors	Numero motori	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz
Stage	Stadi motori	single	single
P max (kW)	P max (kW)	3,0	4,0
IP Protection	Protezione IP	54	54
Tank material	Materiale contenitore	inox 430	inox 430
Total tank capacity (lt)	Capacità tot. fusto (lt)	77	77
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	410
Total filtering surface ( cm <sup>2</sup> )	Superficie filtrante ( cm <sup>2</sup> )	7000	7000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69
Filter shaker	Scuotifiltro	manual	manual



55 x 55 x 140 H cm

### Standard Accessories and Filters

DESCRIPTION	CODE
1 Complete flexible hose mt. 5 Ø40	ACTF385FN
2 Crevice tool Ø40	ACLP040
3 Dusting brush Ø40	ACPE040
4 Polyester bag with ring Ø44	FA044P

### Options

Accessories Ø40

DESCRIPTION	CODE
5 Slide-on for floor nozzle L400	ACIP400
6 Slide-on for liquids nozzle L400	ACIL400
7 Chrome extension wand Ø40	ACTC038D
8 Chrome curved extension wand male Ø40	ACTC038C
9 Nozzle body A/P L400	ACCS400A/P
10 Cartridge filter Ø250 H178	FI250178HL/C
11 Metal crevice tool Ø38	ACLP038CR
12 Crevice tool car wash	ACLP040CW



ASPIRATORI INDUSTRIALI



# ARGO

ARGO è il trifase compatto della nostra nuova gamma ALL BLACK. Può essere fornito di turbina da 3 o da 4kW, con scuotifiltro manuale. La solida struttura industriale comprende uno spazioso vano porta accessori.

ARGO is the compact three-phase vacuum cleaner of our new ALL BLACK range. It can be provided with a 3kW or a 4kW turbine and with manual filter shaker. The tough structure includes a spacious accessory case.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



ASPIRATORI INDUSTRIALI



		BL3100	BL4100
Number motors	Numero motori	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz
Stage	Stadi motori	single	single
P max (kW)	P max (kW)	3,0	4,0
IP Protection	Protezione IP	54	54
Tank material	Materiale contenitore	inox 304	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	100	100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	410
Total filtering surface ( cm <sup>2</sup> )	Superficie filtrante ( cm <sup>2</sup> )	10000	10000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69
Filter shaker	Scuotifiltro	manual	manual



60 x 100 x 100 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Complete flexible hose mt. 5 Ø40	ACTF385FN
2	Crevice tool Ø40	ACLP040
3	Dusting brush Ø40	ACPE040
4	Polyester filter Ø420	FA042P6

### Options

Accessories Ø40

	DESCRIPTION	CODE
5	Slide-on for floor nozzle L400	ACIP400
6	Slide-on for liquids nozzle L400	ACIL400
7	Chrome extension wand Ø40	ACTC038D
8	Chrome curved extension wand male Ø40	ACTC038C
9	Nozzle body A/P L400	ACCS400A/P

### Options

Accessories Ø50

	DESCRIPTION	CODE
10	Complete flexible hose mt. 5 Ø50	ACTF50CN
11	Crevice tool Ø50	ACLP050
12	Chrome curved extension wand male Ø50	ACTS050
13	Triangle nozzle Ø50	ACBO050T
14	Nozzle body A/P L400 Ø50	ACCS40050DAV
15	Slide-on for liquids nozzle L400	ACIL400DAV
16	Slide-on for floor nozzle L400	ACIP400DAV
17	Dusting brush Ø50	ACPE050
18	Automatic stopping liquids	CEKF001L



ASPIRATORI INDUSTRIALI



# ARGO MAXIMUS

ARGO è il trifase compatto della nostra nuova gamma ALL BLACK. Può essere fornito di turbina da 3 o da 4kW, con scuotifiltro manuale. La solida struttura industriale comprende uno spazioso vano porta accessori.

ARGO is the compact three-phase vacuum cleaner of our new ALL BLACK range. It can be provided with a 3kW or a 4kW turbine and with manual filter shaker. The tough structure includes a spacious accessory case.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use

ASPIRATORI INDUSTRIALI



		BL3100T	BL4100T
Number motors	Numero motori	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz
Stage	Stadi motori	single	single
P max (kW)	P max (kW)	3,0	4,0
IP Protection	Protezione IP	54	54
Tank material	Materiale contenitore	inox 304	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	100	100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	330
Total filtering surface (cm <sup>2</sup> )	Superficie filtrante (cm <sup>2</sup> )	10000	10000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69
Filter shaker	Scuotifiltro	manual	manual



120 x 80 x 120 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Cartridge filter Ø250 - H178 HEPA	FI250178H
2	Sponge filter for liquids	ACCA165A
3	Metal Cyclone Ø300	CMCI300N

### Options

KITVEWI375T [ 4 - 11 ]

	DESCRIPTION	CODE
4	Complete flexible hose mt. 2,5 - Ø50	ACTF50C
5	Crevice tool Ø50	ACLP050
6	Chrome extension wand Ø50	ACTS050
7	Triangle nozzle Ø50	ACBO050T
8	Nozzle body A/P L400 Ø50	ACCS40050DAV
9	Slide-on for liquids nozzle L400	ACIL400DAV
10	Slide-on brush for floor nozzle L400	ACIP400DAV
11	Dusting brush Ø50	ACPE050

### Options

KITVEWI375TP [ 12- 17 ]

	DESCRIPTION	CODE
12	Antistatic flexible hose complete mt. 2,5 - Ø50	ACTF50PUC
13	Antistatic conic crevice tool Ø50	ACLCO50A
14	Antistatic corrugated squeegee Ø50	ACVO050A
15	Antistatic conic accessory Ø50	ACTCO50A
16	Zinc plated crevice tool L500mm Ø50	ACLA050Z
17	Zinc plated coupling for accessories Ø50	ACMGO50Z
18	Shavings/oil separator for Maximus	ACSC450IND



ASPIRATORI INDUSTRIALI



# ADONE

ADONE è il più potente trifase della nostra nuova linea ALL BLACK. Può essere fornito di turbina da 3, da 4, da 5,5 o da 7,5kW. Grazie alla sua potente aspirazione e allo scuotifiltro manuale, ADONE garantisce le migliori performance e tempi di manutenzione minimi. Il fusto a distacco rapido frontale risulta molto maneggevole e, grazie alle solide ruote industriali, può sostenere pesi notevoli. ADONE è idoneo a un utilizzo intenso e continuativo, sia come sistema d'aspirazione centralizzato che come unità mobile.

ADONE is the most powerful of our ALL BLACK three-phase range. It can be provided with 3, 4, 5.5 or 7.5kW turbine. Thanks to its strong suction and to the manual filter shaker, ADONE grants the best performances with a really low maintenance. Its frontal removable dust tank is very easy to handle as it is provided with solid industrial wheels that can bear big weights. It is suitable for heavy duty and continuous applications, both in centralized vacuum systems and in mobile service.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



		<b>BL3075</b>	<b>BL4075</b>	<b>BL55100</b>	<b>BL75100</b>
Number motors	Numero motori	1	1	1	1
Stage	Stadi motori	single	single	single	single
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz	turbine 400V-50Hz	turbine 400V-50Hz
Tank material	Materiale contenitore	inox 304	inox 304	inox 304	inox 304
P max (kW)	P max (kW)	3,0	4,0	5,5	7,5
Total filtering surface ( cm <sup>2</sup> )	Superficie filtrante ( cm <sup>2</sup> )	12000	12000	20000	20000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800	3000	3000
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	410	540	700
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69	72	74
Total tank capacity (lt)	Capacità tot. fusto (lt)	100	100	100	100
IP Protection	Protezione IP	54	54	54	54
Filter shaker	Scuotifiltro	YES	YES	YES	YES



120 x 80 x 150 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Polyester filter Ø460	<b>FA046P6</b> for BL3075 - BL4075
2	Polyester filter Ø460	<b>FA046P12</b> for BL55100 - BL75100

### Options

KIT50FOV [ 10 - 16 ] per **BL3075, BL4075**

	DESCRIPTION	CODE
10	Complete flexible hose Ø50	<b>ACMA67507</b>
11	Crevice tool Ø50	<b>ACLP050</b>
12	Chrome curved extension wand male Ø50	<b>ACTS050</b>
13	Triangle nozzle Ø50	<b>ACBO050T</b>
14	Nozzle body A/P L400 Ø50	<b>ACCS40050DAV</b>
15	Slide-on for floor nozzle L400	<b>ACIP400DAV</b>
16	Dusting brush Ø50	<b>ACPE050</b>

### Options

KIT5080 [ 3 - 9 ] per **BL55100, BL75100**

	DESCRIPTION	CODE
3	Complete flexible hose mt. 5 Ø50	<b>ACMA80507</b>
4	Crevice tool Ø50	<b>ACLP050</b>
5	Chrome curved extension wand male Ø50	<b>ACTS050</b>
6	Triangle nozzle Ø50	<b>ACBO050T</b>
7	Nozzle body A/P L400 Ø50	<b>ACCS40050DAV</b>
8	Slide-on for floor nozzle L400	<b>ACIP400DAV</b>
9	Dusting brush Ø50	<b>ACPE050</b>



ASPIRATORI INDUSTRIALI



# ADONE MAX4 KW

ADONE MAX 4kW è il cassonato trifase con grande capacità di raccolta polveri fino a 120lt. La bocca aspirazione in Ø80mm e la superficie filtrante maggiorata consentono una lunga autonomia di lavoro. E' fornito di fusto di raccolta a distacco rapido, veloce da rimuovere e maneggevole grazie alle sue ruote pivotanti. E' dotata di scuotifiltro manuale dall'alto. Il Vacuometro posto sulla testata indica quando il livello di intasamento del filtro.

ADONE MAX 4kW is our compact three-phase vacuum cleaner with a huge dust collection capacity up to 120lt. A great working autonomy is granted by the Ø80mm suction coupling and by the increased filtering surface. It is provided with a mobile dust tank easy to remove and easy to handle because of its castor wheels. It comes with a manual filter shaker. The vacuum gauge on the head shows when the filter is dirty.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



ASPIRATORI INDUSTRIALI




**BL4075MAX**

Number motors	Numero motori	1
Stage	Stadi motori	single
Motor type	Tipo di motore	turbine 400V-50Hz
Tank material	Materiale contenitore	HIGH RESISTANCE PAINTED METAL
P max (kW)	P max (kW)	4,0
Total filtering surface ( cm <sup>2</sup> )	Superficie Filtrante ( cm <sup>2</sup> )	30000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	410
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69
Total tank capacity (lt)	Capacità tot. fusto (lt)	120
IP Protection	Protezione IP	54
Filter shaker	Scuotifiltro	YES



140 x 80 x 180 H cm

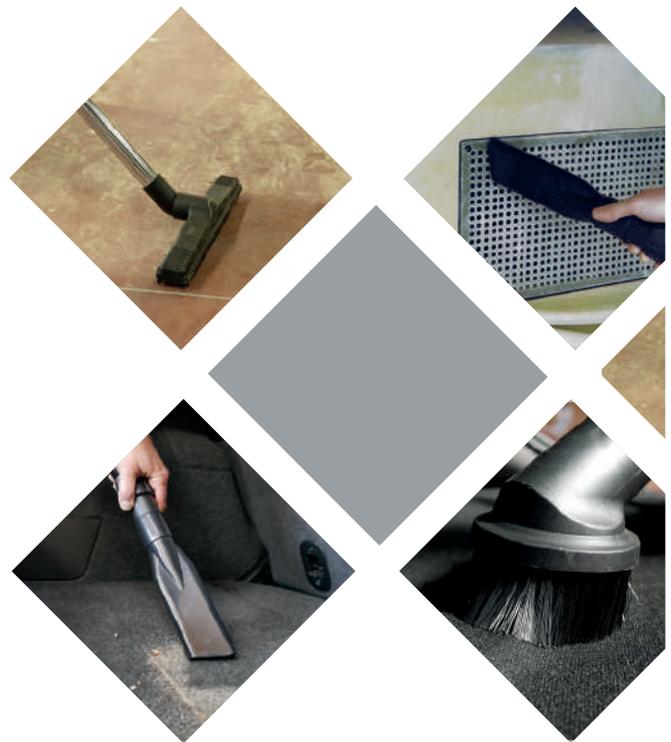**Standard Accessories and Filters**

	DESCRIPTION	CODE
1	Polyester filter Ø460 H580	FA046P12H580

**Options**

KIT5080 [ 2 - 8 ]

	DESCRIPTION	CODE
2	Complete flexible hose 5mt. Ø50	ACTF50805/C
3	Crevice tool Ø50	ACL P050
4	Chrome curved extension wand male Ø50	ACTS050
5	Triangle nozzle Ø50	ACBO050T
6	Nozzle body A/P L400 Ø50	ACCS40050DAV
7	Slide-on for floor nozzle L400	ACIP400DAV
8	Dusting brush Ø50	ACPE050

ASPIRATORI INDUSTRIALI



# ADONE MAX12 KW

ADONE MAX 12kW è il cassonato trifase 12kW più potente e di più grande capacità della gamma ALL BLACK. Grazie alla sua potente aspirazione e alla dotazione accessori adone max 12kW garantisce le migliori performance e tempi di manutenzione minimi. E' fornito di fusto di raccolta a distacco rapido, veloce da rimuovere e maneggevole grazie alle sue ruote pivotanti. La macchina consente un utilizzo intenso e continuativo sia come sistema di aspirazione mobile che come sistema di aspirazione centralizzato.

ADONE MAX 12kW is the most powerful of our ALL BLACK three-phase range. It is provided with a 12kW turbine and it grants the best performances with a really low maintenance. The machine comes with a mobile dust tank easy to remove and easy to handle thanks to its castor wheels. It is suitable for heavy duty and continuous applications, both in centralized vacuum systems and in mobile service.



Motore Trifase  
Threephase Motor



Polvere  
Dry



Uso industriale  
Industrial use



ASPIRATORI INDUSTRIALI



**BL12150MAX**

Number motors	Numero motori	1
Stage	Stadi motori	single
Motor type	Tipo di motore	turbine 400V-50Hz
Tank material	Materiale contenitore	HIGH RESISTANCE PAINTED METAL
P max (kW)	P max (kW)	12
Total filtering surface (cm <sup>2</sup> )	Superficie filtrante (cm <sup>2</sup> )	30000
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	4000
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	700
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	74
Total tank capacity (lt)	Capacità tot. fusto (lt)	150
IP Protection	Protezione IP	54
Filter shaker	Scuotifiltro	YES



140 x 80 x 180 H cm

**Standard Accessories and Filters**

Kit: KD036A

	DESCRIPTION	CODE
1	Polyester filter Ø460 H580	FA046P12H580

**Options**

Kit: 5080 [ 3 - 9 ]

	DESCRIPTION	CODE
2	Complete flexible hose 5mt. Ø50	ACTF50805/C
3	Crevice tool Ø50	ACLP050
4	Chrome curved extension wand male Ø50	ACTS050
5	Triangle nozzle Ø50	ACBO050T
6	Nozzle body A/P L400 Ø50	ACCS40050DAV
7	Slide-on for floor nozzle L400	ACIP400DAV
8	Dusting brush Ø50	ACPE050



ASPIRATORI INDUSTRIALI



# HOT POSEIDON

Estrattore ad acqua calda 3 motori, dotato di un caldaia in ACCIAIOI NOXd a2 litri, che può garantire una temperatura d'acqua fino a 90 gradi in esercizio continuo. La pompa rotativa da 90W che fornisce una pressione di 8 bar, i serbatoi acqua da 30 litri e gli utensili industriali in ACCIAIOI NOX, rendono HOT POSEIDON il partner ideale per impieghi professionali intensivi.

It is a 3 motors carpet cleaner, equipped with a STAINLESS STEEL BOILER with 2 litres of capacity, placed in a dedicated case at the bottom of the machine, that can grant a water temperature up to 90 degrees in continuous operation. A 90W rotary Pump supplies a 8bar injection power. The 30 liters water tank capacity and the industrial upholstery tools INOX STAINLESS STEEL, make this machine the ideal partner for intensive professional uses.



3  
Motori  
Motors



W Acqua  
W Wet



Acqua calda  
Hot water



R Pompa  
estrattore  
rotativa  
R Peripheral  
electrical  
pump



Lavamoquette  
Clean carpet &  
floor **vacuum**


ASPIRATORI INDUSTRIALI



BLHPO375		
Motors number	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max motors (W)	P max motori(W)	3600
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645
P boiler (W)	P caldaia (W)	1800
Pump (W)	Pompa (W)	90
Capacity pump (it/min)	Portata pompa (it/min)	2
Lift pump (bar)	Pressione pompa (bar)	8
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	60
Detergent tank (lt)	Serbatoio detergente (lt)	30
Weight (kg)	Peso (kg)	41,0



60 x 60 x 130 H cm

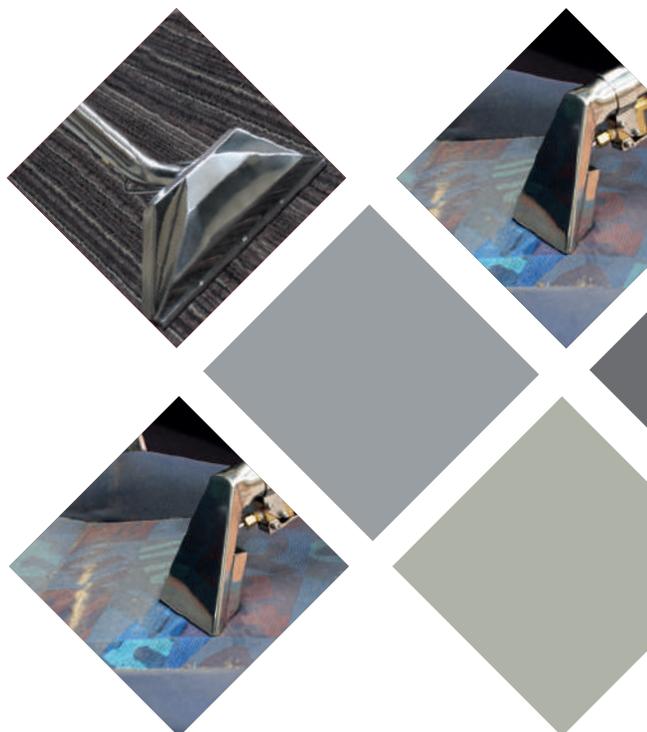

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose+ complete Hydrolitic tube mt.5,0 Ø40	ACTF038EHPN
2	Complete armchair nozzle stainless steel 4" - 100mm	ACBL004PO/C
3	Sponge filter for liquids	ACCA165A
4	Anti-Foam Device	CGDA060
5	Drainage kit	ZLC460143

### Options

	DESCRIPTION	CODE
6	Complete moquette nozzle INOX 12" - 300mm	ACBL012PO/C
7	Complete armchair nozzle PP 4" - 100mm	ACBL100POFC



ASPIRATORI INDUSTRIALI



# HOT FOAM POSEIDON

HOT FOAM POSEIDON macchina iniezione-estrazione SCHIUMA ed acqua calda con struttura industriale interamente in acciaio verniciato. Il gruppo iniezione composto da compressore da 5 lt, pompa da 8bar e boiler da 1500W, produce un'efficace miscela di schiuma ed acqua calda che agisce profondamente sui tessuti senza penetrarne eccessivamente le fibre. L'azione combinata di un potente aspiratore da 3600W consente la massima rimozione di sporco ed una rapida asciugatura delle superfici trattate.

HOT FOAM POSEIDON is an injection-extraction machine mounted on an industrial chassis in painted steel. The injection system is made by a 5 lt compressor, 8 bar pump and a 1500W boiler. It produces an effective mixture of foam and hot water which acts deeply on the fabrics without soaking their fibers. The combined action of a powerful 3600W vacuum cleaner allows the maximum dirt removal and a rapid drying of the treated surfaces.



Motori  
Motors



W Acqua  
W Wet



Schiuma/Acqua calda  
Foam/Hot water



V Pompa estrattore  
vibrazione  
V Solenoid pump



Lavamoquette Clean  
carpet &  
floor **vacuum**

ASPIRATORI INDUSTRIALI



BLFPO375		
Motors number	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max motors (W)	P max motori(W)	3600
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2400
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	645
P boiler (W)	P caldaia (W)	1500
Pump (W)	Pompa (W)	70
Capacity pump (it/min)	Portata pompa (it/min)	1.4
Lift pump (bar)	Pressione pompa (bar)	8
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	60
Detergent tank (lt)	Serbatoio detergente (lt)	30
Weight (kg)	Peso (kg)	51,0




60 x 60 x 130 H cm

### Standard Accessories and Filters

DESCRIPTION	CODE
1 Flexible hose mt.5,0 Ø40	ACTF0385CN
2 Hydrolitic tube	ACTF145HP
3 Complete armchair nozzle stainless steel 4" - 100mm	ACBL004POF/C
4 Armchair Foam Tool with Brush	ACLA310F
5 Foam Manual Brush 120mm	ACSP120F
6 Armchair nozzle PP - 100mm	ACBL100PO
7 Sponge filter for liquids	ACCA165A
8 Anti-Foam Device	CGDA060
9 Drainage kit	ZLC460143

### Options

DESCRIPTION	CODE
10 Nebulizer Accessory 750mm	ACNE750F
11 Complete moquette nozzle INOX 12" - 300mm	ACBL012PO/C

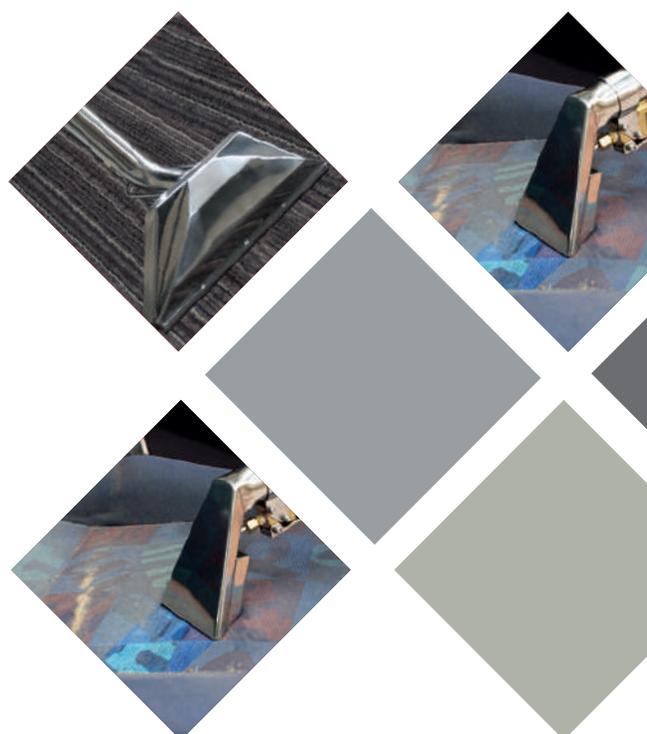

ASPIRATORI INDUSTRIALI



# AQUARIUS

AQUARIUS è il lavamoquette a iniezione/estrazione della linea ALL BLACK. Può essere fornito di turbina da 3 o da 4kW ed è provvisto di sistema automatico di arresto liquidi e di una potente pompa da 90W per l'iniezione di acqua e detergente. Grazie ai 5m di tubo, AQUARIUS è la soluzione perfetta per la pulizia di treni, bus, ecc.

AQUARIUS is the ALL BLACK three-phase carpet cleaner. It can be provided with a 3kW or a 4kW turbine and it comes with the automatic liquid-stop system and with a powerful 90W pump to inject water and detergent. Thanks to its 5m hose, AQUARIUS is the perfect solution to clean trains, buses, etc.



Motore Trifase  
Threephase Motor



W Acqua  
W Wet



R Pompa estraattore rotativa  
R Peripheral electrical pump




Lavamoquette  
Clean carpet & floor  
**vacuum**



		BL3100E	BL4100E
Number motors	Numero motori	1	1
Motor type	Tipo di motore	turbine 400V-50Hz	turbine 400V-50Hz
Stage	Stadi motori	single	single
P max (kW)	P max (kW)	3,0	4,0
IP Protection	Protezione IP	54	54
Tank material	Materiale contenitore	inox 304	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	100	100
Waterlift (mm H <sub>2</sub> O)	Depressione (mmH <sub>2</sub> O)	2800	2800
Air flow (m <sup>3</sup> /h)	Aria aspirata (m <sup>3</sup> /h)	330	410
Total filtering surface (cm <sup>2</sup> )	Superficie filtrante (cm <sup>2</sup> )	10000	10000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69	69
Capacity Pump (lt/min)	Portata pompa (lt/min)	1,8	1,8
Lift pump (bar)	Pressione pompa (bar)	3,5	3,5
Pump (W)	Pompa (W)	90	90
Detergent tank (lt)	Serbatoio detergente (lt)	10	10



120 x 80 x 120 H cm



**La macchina è dotata di blocco automatico liquidi**  
The machine is complete with automatic liquid stop system



ASPIRATORI INDUSTRIALI

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose + hydrolytic tube mt 5,0	ACTF038E5FN
2	Complete armchair nozzle	ACBL100P0ER
3	Drainage kit	ACKI028
4	Automatic stopping liquids	CEKF001L

### Options

	DESCRIPTION	CODE
5	Polyester filter Ø420	FA042P6
6	Complete carpet tool 1 jet	ACLA230/C



# CAR SEATS DRYER

DRYCAR è un asciugatore professionale per interni di autoveicoli. Grazie a due potenti getti d'aria calda, a sciuga sedili e tappetini dell'automobile in brevissimo tempo, velocizzando notevolmente i tempi di attesa.

DRYCAR is a professional dryer for vehicle interiors. Thanks to the two powerful jets of hot air, it dries car seats and rugs very quickly.



Motore  
Motor



Aria calda  
Hot air



Resistenze  
Resistors

ASPIRATORI INDUSTRIALI



BLD3100		
Motors number	Numero motore ventilazione	1
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
P max (W)	P max (W)	3120
P max blower (W)	P max ventilazione (W)	320
P heater (W)	P resistenze (W)	2 x 1400
Tmax (C°)	Tmax (C°)	70
Dimensioni (L x L x H)	Dimensioni (L x L x H)	57 x 57 x 80
Weight (kg)	Peso (kg)	21,5



60 x 60 x 96 H cm

### Standard Accessories

	DESCRIPTION	CODE
1	Tubo calore mt.3 Ø50 2pz.	ACTF050SC
2	Kit sacche asciugatore 3pz	KIT003A
3	Asta reggi tubo	CMS014403




ASPIRATORI INDUSTRIALI



1



2

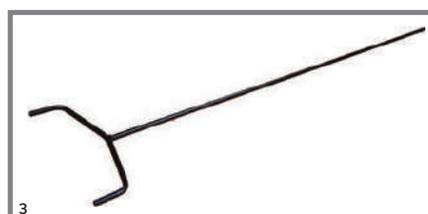

3



# SELF SERVICE singlephase

SELF SERVICE MONOFASE è la proposta di aspirazione automatizzata ELSEA. L'affidabilità certificata della migliore componentistica, associata ad una cabina automatizzata, garantisce piena autonomia di lavoro con costi di manutenzione e sorveglianza pressoché nulli.

SELF SERVICES INGLEPHASE is the ELSEA automated vacuuming proposal. The certified reliability of the top components, associated with an automated control panel, guarantees full-time working autonomy with minimum maintenance/surveillance costs.

 2  
Motori  
Motors


 3  
Motori  
Motors

 D Polvere  
D Dry

 Bluetooth®  
Remote Control

 WI-FI

ASPIRATORI INDUSTRIALI

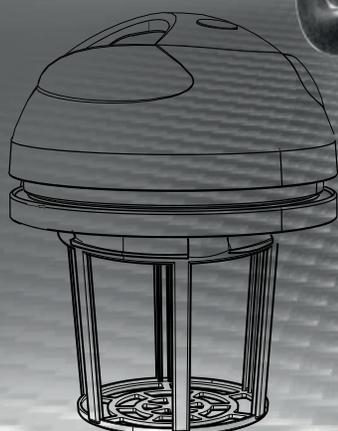

		SS22M	SS33M
Power (W)	Potenza (W)	2200	3300
Volt (V)	Volt (V)	230	230
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60
Air flow m3h	Aria aspirata m3h	340	510
Waterlift mmh20	Depressione mmh20	2250	2250
Total tank capacity (L)	Capacità tot. fusto (L)	77	77



60 x 75 x 160 H cm



### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose mt .5 Ø40	ACTF385CSSN
2	Crevice tool Ø40	ACLP040
3	Polyester filter with ring Ø 44	FA044P

### Options

	DESCRIPTION	CODE
4	Dusting brush Ø40	ACPE040
5	Crevice tool stainless steel Ø40	ACLP038CR
6	Crevice tool car wash	ACLP040CW



# SELF SERVICE threephase

SELF SERVICE TRIFASE è la proposta di aspirazione automatizzata ELSEA. L'affidabilità certificata della migliore componentistica, associata ad una cabina automatizzata, garantisce piena autonomia di lavoro con costi di manutenzione e sorveglianza pressoché nulli.

SELF SERVICE THREEPHASE is the ELSEA automated vacuuming proposal. The certified reliability of the top components, associated with an automated control panel, guarantees full-time working autonomy with minimum maintenance/surveillance costs.



**D** Polvere  
**D** Dry



Scuotifiltro interno  
Inside system  
cleaning filter




**Bluetooth**  
Remote  
Control



WI-FI

ASPIRATORI INDUSTRIALI

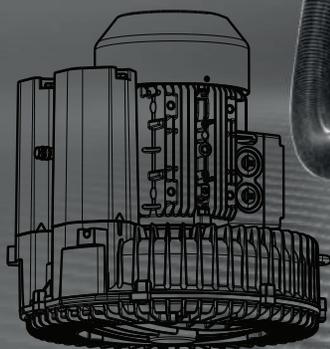

		SS22T	SS22TV	SS22T230
Power (kW)	Potenza (kW)	2,2	2,2	2,2
Volt (V)	Volt (V)	400	400	230
Frequency (Hz)	Frequenza (Hz)	50 / 60	50 / 60	50 / 60
Air flow m <sup>3</sup> h	Aria aspirata m <sup>3</sup> h	320	320	320
Waterlift mmH <sub>2</sub> O	Depressione mmH <sub>2</sub> O	2800	2800	2800
Total tank capacity (L)	Capacità tot. fusto (L)	70	70	70
Sistem cleaning filter	Scuotifiltro	manuale	automatico	manuale



60 x 75 x 160 H cm

### Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose mt .5 Ø40	ACTF385CSS
2	Crevice tool Ø40	ACLP040
3	Cartridge filter Ø370 H250	FI370250

### Options

	DESCRIPTION	CODE
4	Dusting brush Ø40	ACPE040
5	Crevice tool stainless steel Ø40	ACLP038CR
6	Crevice tool car wash	ACLP040CW



ASPIRATORI INDUSTRIALI





# LINEA VAPORE



LINEA VAPORE



# Nanosteam

**compatta ● maneggevole ●  
semplicità d'uso ● rapidità  
pronto vapore**

**compact ● handy ●  
easy-to-use ● quickly ready  
steam**

**Nanosteam** è dotato di una caldaia in acciaio inox da 2lt con resistenza esterna a piastra piana da 2000W. Le quattro ruote antitraccia e pivotanti e la maniglia superiore ergonomica consentono una semplicità di movimentazione ed una estrema maneggevolezza.

**Nanosteam** has a 2 l stainless steel boiler with external 2000 W flat plate heating element. Four non-marking, castors and an ergonomic top handle make it easy to move and very handy.



## SN0051

<b>Alimentazione / Power</b>	220 - 240V -50/60Hz
<b>Capacità caldaia / Boiler capacity</b>	2,0 lt
<b>Potenza caldaia / Boiler power</b>	2000 W
<b>Tempo di riscaldamento / Heating time</b>	12 min
<b>Pressione di esercizio / Working pressure</b>	5 BAR
<b>Produzione vapore kg/h / Steam production kg/h</b>	3,5 kg/h
<b>Temperatura vapore in caldaia / Steam temperature in the boiler</b>	155°
<b>Ricarica caldaia / Charging Boiler</b>	Manuale/Manual
<b>Materiale struttura / Case Material</b>	Acciaio Inox / Inox 304 scotch brite
<b>Peso (kg) / Weight (kg)</b>	7,9 kg
<b>Lunghezza cavo / Cable lenght</b>	8,5 m
<b>Dimensioni (PxLxH) / Dimensioni (PxLxH)</b>	264x410x265 mm



## Standard Accessories



**ACTV029V3**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose

## Options



**ACPV049**  
Steam pipe extension 490mm



**ACST029C**  
Triangle steam brush



**ACSV270C**  
Steam brush



**ACTV230V**  
Manual steam squeegee



**ACSP500S**  
Steam brush for cleaning seats and dress



**KIT029CG**  
Kit for chewing gum removal



**ACPV200UO**  
Terminal steam hose brass



**ACNE150V**  
Detergent nebulizer



**ACMO029**  
Triangle MOP



**ACMO270**  
Steam brush MOP



# Virosteam

**robusta • lunga autonomia di lavoro senza pause • compatta • maneggevole • design ricercato**

**robust • long continuous uptime • compact • handy • sophisticated design**

**Virosteam** è dotato di una caldaia in acciaio inox 3lt con resistenza integrata da 2000W nella versione a 8bar e da 3200W nella versione a 10bar. La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata senza pause. La plancia comandi è completata da un rubinetto di regolazione del vapore e da un indicatore di pressione. Le quattro ruote antitraccia e pivotanti consentono una semplicità di movimentazione. Possibilità di dotazione di un maniglione e cestello porta accessori (optional).

**Virosteam** has a 3 l stainless steel boiler with built-in heating element for a power of up to 2000 W in the 8 bar version and 3200 W in the 10 bar version. Automatic water charging in the boiler gives it an extended continuous uptime. The control panel includes a steam adjustment cock and a pressure gauge. Four non-marking castors make it easy to handle. It can be equipped with a large handle and accessory basket (optional).



	<b>SV008 / SV008S*</b>	<b>SV010 / SV010S*</b>
<b>Alimentazione / Power</b>	220 - 240V -50/60Hz	220 - 240V -50/60Hz
<b>Capacità caldaia / Boiler capacity</b>	3,0 lt	3,0 lt
<b>Potenza caldaia / Boiler power</b>	2200 W	2000 W + 1200W
<b>Tempo di riscaldamento / Heating time</b>	15 min	10 min
<b>Pressione di esercizio / Working pressure</b>	8 BAR	10 BAR
<b>Produzione vapore kg/h / Steam production kg/h</b>	5,2 kg/h	6,0 kg/h
<b>Regolazione vapore / Steam Regulator</b>	si / yes	si / yes
<b>Temperatura vapore in caldaia / Steam temperature in the boiler</b>	175°	185°
<b>Ricarica caldaia / Charging Boiler</b>	Automatica / Automatic	Automatica / Automatic
<b>Capacità serbatoio acqua / Water tank capacity</b>	2 lt	2 lt
<b>Materiale struttura / Case Material</b>	acciaio verniciato / painted steel *acciaio inox 304 / stainless steel 304	acciaio verniciato / painted steel *acciaio inox 304 / stainless steel 304
<b>Peso (kg) / Weight (kg)</b>	11,0 kg	11,2 kg
<b>Lunghezza cavo / Cable lenght</b>	8,5 m	8,5 m
<b>Dimensioni (PxLxH) / Dimension (PxLxH)</b>	355x410x355 mm	355x410x355 mm



## Standard Accessories



**ACTV029V3**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACPV200UO**  
Terminal steam hose brass

## Options



**ACPE010VVOT**  
Steam brush -  
Brass bristles



**ACPE010VVIN**  
Steam brush -  
Stainless Steel Bristles



**ACPV049**  
Steam pipe  
extension 490mm



**ACST029C**  
Triangle steam brush



**ACSV270C**  
Steam brush



**ACTV230V**  
Manual steam squeegee



**ACSP500S**  
Steam brush for cleaning  
seats and dress



**KIT029CG**  
Kit for chewing gum  
removal



**ACNE150V**  
Detergent nebulizer



**ACMO029**  
Triangle MOP



**ACMO270**  
Steam brush MOP



**CMMA007/C**  
Complete Trolley with  
Accessories Basket



# Virodec

**design ricercato ●  
multifunzione ● lunga  
autonomia di lavoro senza  
pause ● compatta ● versatile**

**Virodec** è dotato di una caldaia in acciaio inox 3lt con resistenza integrata con potenza fino a 2000W.

La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata e costante.

2 distinti serbatoi da 5lt per ACQUA (ricarica caldaia) e detergente.

Plancia comandi completata da 2 manopole dedicate alla regolazione indipendente di Vapore e detergente a da un visualizzatore di pressione vapore, oltre che di un alloggiamento per TUBO VAPORE e pozzetto di scarico per condensa di primo vapore.

Cestello porta accessori e ruote ricercate dotate di parafile antisporco e freno di stazionamento ne completano la dotazione

**sophisticated design  
● multifunction ● long  
continuous uptime ● compact  
● versatile**

**Virodec** has a 3 l stainless steel boiler with built-in heating element for a power of up to 2000 W.

Automatic water charging in the boiler gives it an extended continuous uptime.

*Two separate 5 l tanks for WATER (boiler charging) and detergent.*

The control panel includes two knobs to adjust the steam and detergent independently, and a steam pressure display, as well as a STEAM HOSE compartment and steam condensate drain outlet.

The standard equipment includes an accessory trolley and sophisticated wheels with dirt guards and parking brake.



LINEA VAPORE

<b>Alimentazione</b> / Power	230V - 50/60Hz
<b>Capacità caldaia</b> / Boiler capacity	3,0 lt
<b>Potenza caldaia</b> / Boiler power	2200 W
<b>Tempo di riscaldamento</b> / Heating time	10 min
<b>Pressione di esercizio</b> / Working pressure	8 BAR
<b>Produzione vapore kg/h</b> / Steam production kg/h	5,2 kg/h
<b>Regolazione vapore</b> / Steam Regulator	si/yes
<b>Temperatura vapore in caldaia</b> / Steam temperature in the boiler	170°
<b>Ricarica caldaia</b> / Charging Boiler	Automatica / Automatic
<b>Capacità serbatoio acqua</b> / Water tank capacity	5 lt
<b>Capacità serbatoio detergente</b> / Detergent tank capacity	5 lt
<b>Peso (kg)</b> / Weight (kg)	31,0 kg
<b>Lunghezza cavo</b> / Cable length	8,5 m

## SM2000



## Standard Accessories



**ACTV029V3D**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACPV200UO**  
Terminal steam hose brass

## Options



**ACPE010VVOT**  
Steam brush -  
Brass bristles



**ACPE010VVIN**  
Steam brush -  
Stainless Steel Bristles



**ACPV049**  
Steam pipe  
extension 490mm



**ACST029C**  
Triangle steam brush



**ACSV270C**  
Steam brush



**ACTV230V**  
Manual steam squeegee



**ACSP500S**  
Steam brush for cleaning  
seats and dress



**KIT029CG**  
Kit for chewing gum removal



**ACNE150V**  
Detergent nebulizer



**ACPE065V**  
Steam brush ø65 mm



**ACMO029**  
Triangle MOP



**ACMO270**  
Steam brush MOP



# Steam Wave

**compatto ● lunga autonomia di lavoro senza pause ● potenza aspirante ● ricca dotazione accessori**

**Steam Wave** è dotato di una caldaia in acciaio inox 3lt con resistenza integrata con potenza fino a 2200W.

La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata e costante.

Serbatoio da 8lt per acqua (ricarica caldaia) integrato nel carrello con ruote pivotanti oltre ad un serbatoio di recupero sporco da 20lt.

Plancia comandi con manopola di regolazione vapore.

Numerosi accessori per le più diverse operazioni di pulizia di tutti i settori di riferimento.

**compact ● long continuous uptime ● suction power ● extensive standard accessories**

**Steam Wave** has a 3 l stainless steel boiler with built-in double heating element for a power of up to 2200 W.

Automatic water charging in the boiler gives it an extended continuous uptime.

It has an 8 l water tank (boiler charging) built into the trolley with castors, as well as a 20 l dirt recovery tank.

The control panel includes a steam adjustment knob.

Numerous accessories can cover a wide range of cleaning tasks in all application sectors.



LINEA VAPORE

	<b>SWP110</b>
<b>Alimentazione</b> / Power	230V - 50Hz
<b>Capacità caldaia</b> / Boiler capacity	3,0 lt
<b>Potenza caldaia</b> / Boiler power	2200 W
<b>Pressione di esercizio</b> / Working pressure	6 BAR
<b>Produzione vapore kg/h</b> / Steam production kg/h	4,0 kg/h
<b>Temperatura vapore in caldaia</b> / Steam temperature in the boiler	140°
<b>Pmax aspiraliqidi bistadio</b> / Pmax vacuum double stage	1400 W
<b>Capacità serbatoio inox</b> / Stainless steel tank capacity	22 lt
<b>Capacità serbatoio riserva acqua</b> / Water tank capacity	8,0 lt
<b>Peso (kg)</b> / Weight (kg)	22 Kg



## Standard Accessories



**ACTV029V3**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACTA036V3D**  
Steam-Vacuum hose 3m



**ACMT036VA**  
Terminal steam-vacuum hose



**ACPE010VA**  
Little brush steam-vacuum hose



**ACPE036**  
Dusting brush Ø36



**ACCS150V**  
Steam manual body brush



**ACIL150V**  
Slide-on for liquids manual nozzle



**ACIP150V**  
Slide-on brush manual nozzle



**ACLP036**  
Crevice tool Ø36



**ACBO036**  
Little nozzle Ø36



**ACSP150**  
Radiator brush



**ACTP037VM**  
Steam extension wand



**ACCS300V**  
Steam body nozzle L 300



**ACCA165A**  
Sponge filter



**ACIP300V**  
Slide-on brush for floor steam nozzle L 300



**ACIL300V**  
Slide-on for liquids steam nozzle



**ACIT300V**  
Slide-on for carpet steam nozzle



**ACBL100POV4**  
Armchair steam nozzle



**ACBL225VS**  
Steam nozzle carpet tool

## Options



**ACTR185C**  
Charging hose Ø18,5mm L 1,5m + funnel



**FA034PP**  
Polyester filter with ring Ø36



**ACTV250**  
Steam/Vacuum brush for glass 250mm



**ACSP500S**  
Steam brush for cleaning seats and dress



**ACPE010VVOT**  
Steam brush - Brass bristles



**ACPE010VVIN**  
Steam brush - Stainless Steel Bristles



**ACPE010VDOT**  
Steam/Vacuum Little Brush - Brass Bristles



**ACPE010VDIN**  
Steam/Vacuum Little Brush - Stainless Steel Bristles



**ACPV200UO**  
Terminal Steam Hose L200mm with Brass Nozzle



# Steam Plus

**versatile • multifunzione •  
lunga autonomia di lavoro  
senza pause • potenza  
aspirante • ricca dotazione  
accessori**

**Steam Plus** è dotata di una caldaia in acciaio inox 3lt con doppia resistenza integrata con potenza fino a 3200W. La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata e costante. La macchina è fornita di due distinti serbatoi da 5lt per ACQUA (ricarica caldaia e funzione Hidrojet) e detergente (funzione CHEMICAL), oltre ad un serbatoio di recupero sporco da 20lt. Plancia comandi completata da un display a 6 cifre per la visualizzazione dei vari messaggi di lavoro e da 3 manopole dedicate alla regolazione indipendente di Vapore, acqua e detergente. Numerosi accessori per le più diverse operazioni di pulizia, da alloggiare in un comodo cassetto anteriore.

**versatile • multifunction •  
long continuous uptime •  
suction power • extensive  
standard accessories**

**Steam Plus** has a 3 l stainless steel boiler with built-in double heating element for a power of up to 3200 W. Automatic water charging in the boiler gives it an extended continuous uptime. The machine has two separate 5 l WATER tanks (boiler charging and hydrojet function) and detergent (CHEMICAL function), as well as a 20 l dirt recovery tank. The control panel comes complete with a 6-digit display to view the various operating messages, and three knobs to adjust the steam, water and detergent independently. Numerous accessories to cover a wide range of cleaning tasks can be kept in a convenient front drawer.



LINEA VAPORE

	<b>SWI125N</b>	<b>SWI125N10</b>
<b>Alimentazione / Power</b>	230V - 50Hz	230V - 50Hz
<b>Capacità caldaia / Boiler capacity</b>	3,5 lt	3,5 lt
<b>Potenza caldaia / Boiler power</b>	2000 + 1200 W	2000 + 1200 W
<b>Pressione di esercizio / Working pressure</b>	8 BAR	10 BAR
<b>Produzione vapore kg/h / Steam production kg/h</b>	5,22 kg/h	6,0 kg/h
<b>Temperatura vapore in caldaia / Steam temperature in the boiler</b>	180°	180°
<b>Serbatoio acqua / Water tank</b>	5 lt	5 lt
<b>Serbatoio detergente / Detergent tank</b>	5 lt	5 lt
<b>Pmax aspiraliquidi bistadio / Pmax vacuum double stage</b>	1400 W	1400 W
<b>Capacità serbatoio inox / Stainless tank capacity</b>	22 lt	22 lt
<b>Peso (kg) / Weight (kg)</b>	45 Kg	45 Kg



## Standard Accessories



**ACTV029V21**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACTA036VA21**  
Steam-Vacuum hose 3m



**ACMT036VA**  
Terminal steam-vacuum hose



**ACPE010VA**  
Little brush steam-vacuum hose



**ACCS150V**  
Steam manual body brush



**ACIL150V**  
Slide-on for liquids manual nozzle



**ACIP150V**  
Slide-on brush manual nozzle



**ACLP036**  
Crevice tool Ø36



**ACPE036**  
Dusting brush Ø36



**ACBO036**  
Little nozzle Ø36



**ACSP150**  
Radiator brush



**ACTP037VM**  
Steam extension wand



**ACCS300V**  
Steam body nozzle L 300



**ACIP300V**  
Slide-on brush for floor steam nozzle L 300



**ACIL300V**  
Slide-on for liquids steam nozzle



**ACIT300V**  
Slide-on for carpet steam nozzle



**ACBL100POV4**  
Armchair steam nozzle



**ACBL225VS**  
Steam nozzle carpet tool



**ACCA165A**  
Sponge filter

## Options



**ACTR185C**  
Charging hose Ø18,5mm L 1,5m + funnel



**ACSP500SP21**  
Steam brush for cleaning seats and dress



**FA034PP**  
Polyester filter with ring Ø36



**ACTV250**  
Steam/Vacuum brush for glass 250mm



**KIT029CG**  
Kit for chewing gum removal



# Steam Plus Ozono

ozonO<sub>3</sub>

**versatile • multifunzione •  
doppia postazione • lunga  
autonomia di lavoro senza  
pause • potenza aspirante •  
funzione OZONO**

versatile • multifunction •  
dual work positions • long  
continuous uptime • suction  
power • OZONO function

**Steam Plus OZONO** è dotato di una caldaia in acciaio inox 3lt con doppia resistenza integrata con potenza fino a 3200W. La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata e costante. 2 distinti serbatoi da 5lt per ACQUA (ricarica caldaia e funzione Hidrojet) e detergente (funzione CHEMICAL), oltre ad un serbatoio di recupero sporco da 20lt. Plancia comandi completata da un display a 6 cifre per la visualizzazione dei vari messaggi di lavoro e da 3 manopole dedicate alla regolazione indipendente di Vapore, acqua e detergente. Erogazione dell'OZONO attivabile tramite pulsanti digitali sulla plancia comandi secondo tre differenti programmi; è possibile inoltre la regolazione della durata del trattamento in minuti e lo spegnimento automatico a fine ciclo. Numerosi accessori per le più diverse operazioni di pulizia, da alloggiare in un comodo cassetto anteriore.

**Steam Plus OZONE** has a 3 l stainless steel boiler with built-in double heating element for a power of up to 3200 W. Automatic water charging in the boiler gives it an extended continuous uptime. It has two separate 5 l WATER tanks (boiler charging and hydrojet function) and detergent (CHEMICAL function), as well as a 20 l dirt recovery tank. The control panel comes complete with a 6-digit display to view the various operating messages, and three knobs to adjust the steam, water and detergent independently. OZONE dispensing can be activated by means of digital buttons on the control panel, which select from three different programs; it is also possible to adjust the treatment time in minutes and automatically shut-down at the end of the cycle. Numerous accessories to cover a wide range of cleaning tasks can be kept in a convenient front drawer.



LINEA VAPORE

	SWI125NO	SWI125NO10
Alimentazione / Power	230V - 50Hz	230V - 50Hz
Capacità caldaia / Boiler capacity	3,5 lt	3,5 lt
Potenza caldaia / Boiler power	1500 + 1500 W	2000 + 1200 W
Pressione di esercizio / Working pressure	8 BAR	10 BAR
Produzione vapore kg/h / Steam production kg/h	5,22 kg/h	6,0 kg/h
Temperatura vapore in caldaia / Steam temperature in the boiler	180°	180°
Serbatoio acqua / Water tank	5 lt	5 lt
Serbatoio detergente / Detergent tank	5 lt	5 lt
Pmax aspiraliquidi bistadio / Pmax vacuum double stage	1400 W	1400 W
Capacità serbatoio inox / Stainless tank capacity	22 lt	22 lt
Peso (kg) / Weight (kg)	45 Kg	45 Kg



## Standard Accessories



**ACTV029VO21**  
Steam hose 3m



**ACPV200UO**  
Terminal steam hose brass



**ACTA036VA21**  
Steam-Vacuum hose 3m



**ACBL100POV4**  
Armchair steam nozzle



**ACCA165A**  
Sponge filter



**ACSP500SPO21**  
Steam brush for cleaning seats



**ACTF036/3,3/C**  
Ozone hose

## Options



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACMT036VA**  
Terminal steam-vacuum hose



**ACPE010VA**  
Little brush steam-vacuum hose



**ACCS150V**  
Steam manual body brush



**ACIL150V**  
Slide-on for liquids manual nozzle



**ACIP150V**  
Slide-on brush manual nozzle



**ACLP036**  
Crevice tool Ø36



**ACPE036**  
Dusting brush Ø36



**ACBO036**  
Little nozzle Ø36



**ACSP150**  
Radiator brush



**ACTP037VM**  
Steam extension wand



**ACCS300V**  
Steam body nozzle L 300



**ACIP300V**  
Slide-on brush for floor steam nozzle L 300



**ACIL300V**  
Slide-on for liquids steam nozzle



**ACIT300V**  
Slide-on for carpet steam nozzle



**ACBL225VS**  
Steam nozzle carpet tool



**FA034PP**  
Polyester filter with ring Ø36



**ACTR185C**  
Charging hose Ø18,5mm L 1,5m + funnel



**ACTV250**  
Steam/Vacuum brush for glass 250mm



# Steam Poseidon

**versatile • multifunzione • lunga autonomia di lavoro senza pause • potenza aspirante • ricca dotazione accessori**

**Steam Poseidon** è munito di una caldaia in acciaio inox 3lt con resistenza integrata con potenza fino a 2200W. La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata e costante. Due distinti serbatoi da 5lt per ACQUA (ricarica caldaia) e detergente (funzione CHEMICAL), oltre ad un serbatoio di recupero sporco da 77lt. Plancia comandi completata da 2 manopole dedicate alla regolazione indipendente di Vapore e detergente a da un visualizzatore di pressione. Numerosi accessori adatti per le più diverse operazioni di pulizia nei settori CAR WASH, DETAILING, AUTOMOTIVE.

versatile • multifunzione • long continuous uptime • suction power • extensive standard accessories

**Steam Poseidon** has a 3 l stainless steel boiler with built-in double heating element for a power of up to 2200 W. Automatic water charging in the boiler gives it an extended continuous uptime. It has two separate 5 l WATER tanks (boiler charging) and detergent (CHEMICAL function), as well as a 77 l dirt recovery tank. The control panel includes two knobs to adjust the steam and detergent independently, and a pressure gauge. There are numerous accessories to cover a wide range of cleaning tasks in the CAR WASH, DETAILING and AUTOMOTIVE sectors.



LINEA VAPORE

	SWI140S	SWI220S	SWI140S9B	SWI220S9B
<b>Alimentazione / Power</b>	230V - 50Hz	230V - 50Hz	230V - 50Hz	230V - 50Hz
<b>Capacità caldaia / Boiler capacity</b>	2,2 lt	2,2 lt	2,2 lt	2,2 lt
<b>Potenza caldaia / Boiler power</b>	2000 W	2000 W	2000 W	2000 W
<b>Pressione di esercizio / Working pressure</b>	7 BAR	7 BAR	9 BAR	9 BAR
<b>Produzione vapore kg/h / Steam production kg/h</b>	5,0 kg/h	5,0 kg/h	6,0 kg/h	6,0 kg/h
<b>Temperatura vapore in caldaia / Steam temperature boiler</b>	165°	165°	165°	165°
<b>Pmax aspiraliquidi / Pmax vacuum</b>	1400 W	2050 W	1400 W	2050 W
<b>Capacità serbatoio inox / Stainless tank capacity</b>	60 lt	60 lt	60 lt	60 lt
<b>Capacità serbatoio acqua / Water tank capacity</b>	5,0 lt	5,0 lt	5,0 lt	5,0 lt
<b>Peso (kg) / Weight (kg)</b>	34 kg	36 kg	34 kg	36 kg



## Standard Accessories



**ACTA036VN**  
Steam-Vacuum  
hose 3m



**ACMT036VA**  
Terminal steam-  
vacuum hose



**ACPE010VA**  
Little brush steam-  
vacuum hose



**ACPE010VDOT**  
Little brush steam-  
vacuum hose brass



**ACPE010VDIN**  
Little brush steam-  
vacuum hose inox



**ACTF38/2,5/CN**  
Complete flexible hose  
mt.2,5 ø40



**ACCS150V**  
Steam manual body  
brush



**ACIL150V**  
Slide-on for liquids  
manual nozzle



**ACIP150V**  
Slide-on brush  
manual nozzle



**ACLPO36**  
Crevice tool ø36



**ACPE036**  
Dusting brush ø36



**ACTP037VM**  
Steam extension  
wand



**ACCS300V**  
Steam body nozzle  
L 300



**ACIP300V**  
Slide-on brush for floor  
steam nozzle L 300



**ACIL300V**  
Slide-on for liquids  
steam nozzle



**ACIT300V**  
Slide-on for carpet  
steam nozzle



**ACBL100POV4**  
Armchair steam  
nozzle



**ACCA165A**  
Sponge filter



**FI250178PZN**  
Polyester cartridge filter  
Ø250 -H178

## Options



**ACTV029V3**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACPV200UO**  
Terminal steam hose brass



**ACTV250**  
Steam/Vacuum brush  
for glass 250mm



**ACSP500S**  
Steam brush for cleaning  
seats and dress



# Steam mini combinata

design ricercato ●  
 multifunzione ● lunga  
 autonomia di lavoro ● senza  
 pause ● potenza aspirante ●  
 ricca dotazione accessori

**Steam Mini Combinata** è dotato di una caldaia in acciaio inox 3lt con doppia resistenza integrata con potenza fino a 3200W. La ricarica automatica dell'acqua in caldaia consente un'autonomia di lavoro prolungata e costante. La plancia comandi è completata da un display a 6 cifre per la visualizzazione dei vari messaggi di lavoro e da 3 manopole dedicate alla regolazione indipendente di Vapore, acqua calda e detergente. Il design della macchina si completa con un maniglione di trasporto ed un portaccessori superiore. Le ruote dal design ricercato sono dotate di parafilo antisporcio e freno di stazionamento.

sophisticated design  
 ● multifunction ● long  
 continuous uptime ● suction  
 power ● suction power ●  
 extensive standard accessories

**Steam Mini Combinata** has a 3 l stainless steel boiler with double built-in heating element for a power of up to 3200 W. Automatic water charging in the boiler gives it an extended continuous uptime. The control panel comes complete with a 6-digit display to view the various operating messages, and three knobs to adjust the steam, hot water and detergent independently. The machine design includes a transport handle and an accessory holder on top. The wheels feature a sophisticated design with dirt guards and parking brake.



LINEA VAPORE

	SC008M	SC010M
Alimentazione / Power	230V - 50Hz	230V - 50Hz
Capacità caldaia / Boiler capacity	3,5 lt	3,5 lt
Potenza caldaia / Boiler power	2000 W	2000 + 1200 W
Pressione di esercizio / Working pressure	8 BAR	10 BAR
Produzione vapore kg/h / Steam production kg/h	5,22 kg/h	6,0 kg/h
Temperatura vapore in caldaia / Steam temperature in the boiler	175°	180°
Serbatoio acqua / Water tank	2 lt	2 lt
Serbatoio detergente / Detergent tank	2 lt	2 lt
Pmax aspiraliquidi bistadio / Pmax vacuum double stage	1250 W	1250 W
Capacità serbatoio inox / Stainless tank capacity	13,5 lt	13,5 lt
Peso (kg) / Weight (kg)	35 Kg	37 Kg



## Standard Accessories



**ACTV029SCM**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACTA036SC**  
Steam-Vacuum hose 3m



**ACMT036VA**  
Terminal steam-vacuum hose



**ACPE010VA**  
Little brush steam-vacuum hose



**ACCS150V**  
Steam manual body brush



**ACIL150V**  
Slide-on for liquids manual nozzle



**ACIP150V**  
Slide-on brush manual nozzle



**ACLP036**  
Crevice tool Ø36



**ACPE036**  
Dusting brush Ø36



**ACTP037VM**  
Steam extension wand



**ACCS300V**  
Steam body nozzle L 300



**ACIP300V**  
Slide-on brush for floor steam nozzle L 300



**ACIL300V**  
Slide-on for liquids steam nozzle



**ACIT300V**  
Slide-on for carpet steam nozzle



**ACBL100POV4**  
Armchair steam nozzle



**ACBL225VS**  
Steam nozzle carpet tool



**ACCA165A**  
Sponge filter

## Options



**ACSP500SC**  
Steam brush for cleaning seats and dress



**ACTV250**  
Steam/Vacuum brush for glass 250mm



# Steam combinata

**design ricercato ● robusta  
● multifunzione ● doppia  
postazione di lavoro ● lunga  
autonomia ● potenza aspirante  
● ricca dotazione di accessori**

La **Steam Combinata** è dotata di una caldaia in acciaio inox 3lt con doppia resistenza integrata fino a 3200W. La ricarica automatica dell'acqua in caldaia consente una autonomia di lavoro prolungata e senza soste per due operatori contemporanei.

La plancia comandi è completata da un display a 6 cifre per la visualizzazione dei vari messaggi di lavoro, da un rubinetto di regolazione del vapore e da due indipendenti per la regolazione del detergente e dell'acqua calda. Il design della macchina si completa con un maniglione di trasporto ed un portaccessori superiore. Le ruote ricercate sono dotate di parafile antisporco e freno di stazionamento. Il vano di raccolta in aspirazione dello sporco è dotato di leverismo a sgancio rapido e facilitato.

**sophisticated design ● robust  
● multifunction ● dual work  
positions ● long uptime ●  
suction power ● extensive  
standard accessories**

**Steam Combinata** has a 3 l stainless steel boiler with built-in double heating element for a power of up to 3200 W.

Automatic water charging in the boiler gives it an extended continuous uptime, even when used by two operators at the same time. The control panel comes complete with a 6-digit display to view the various operating messages, and three knobs to adjust the steam, hot water and detergent independently.

The machine design includes a transport handle and an accessory holder on top. The wheels feature a sophisticated design with dirt guards and parking brake. The dirt suction compartment has a quick-release mechanism that is easy to use.



LINEA VAPORE

## SC3200

<b>Alimentazione / Power</b>	230V - 50Hz
<b>Capacità caldaia / Boiler capacity</b>	3,5 lt
<b>Potenza caldaia / Boiler power</b>	2000 + 1200 W
<b>Pressione di esercizio / Working pressure</b>	10 BAR
<b>Produzione vapore kg/h / Steam production kg/h</b>	6,0 kg/h
<b>Temperatura vapore in caldaia / Steam temperature in the boiler</b>	180°
<b>Serbatoio acqua / Water tank</b>	5 lt
<b>Serbatoio detergente / Detergent tank</b>	5 lt
<b>Pmax aspiraliquidi bistadio / Pmax vacuum double stage</b>	1400 W
<b>Capacità serbatoio inox / Stainless tank capacity</b>	13,5 lt
<b>Peso (kg) / Weight (kg)</b>	45 Kg



## Standard Accessories



**ACTV029SC**  
Steam hose 3m



**ACMT036V**  
Terminal steam hose



**ACPE010VV**  
Little brush steam hose



**ACTA036SC**  
Steam-Vacuum hose 3m



**ACMT036VA**  
Terminal steam-vacuum hose



**ACPE010VA**  
Little brush steam-vacuum hose



**ACCS150V**  
Steam manual body brush



**ACIL150V**  
Slide-on for liquids manual nozzle



**ACIP150V**  
Slide-on brush manual nozzle



**ACLP036**  
Crevice tool Ø36



**ACPE036**  
Dusting brush Ø36



**ACBO036**  
Little nozzle Ø36



**ACSP150**  
Radiator brush



**ACTP037VM**  
Steam extension wand



**ACCS300V**  
Steam body nozzle L 300



**ACIP300V**  
Slide-on brush for floor steam nozzle L 300



**ACIL300V**  
Slide-on for liquids steam nozzle



**ACIT300V**  
Slide-on for carpet steam nozzle



**ACBL100POV4**  
Armchair steam nozzle



**ACBL225VS**  
Steam nozzle carpet tool



**ACCA165A**  
Sponge filter

## Options



**ACSP500SC**  
Steam brush for cleaning seats and dress



**ACTV250**  
Steam/Vacuum brush for glass 250mm





# LAVASCIUGA



# LAVASCIUGA SCRUBBERS ZLA35

Macchina lavasciuga estremamente agile e compatta. Per tutti gli ambienti dove lo spazio manca.

Scrubbing machine very compact and easy to use. Answer to the constant request of machines even in the most limited spaces.



## ZLA35CBG

Lavapavimenti completa di batteria Gel e carica batteria  
Compact scrubber with battery Gel and charger

## ZLA35C

Lavapavimenti a cavo  
Compact scrubber with power cord

		ZLA35CBG	ZLA35C
Alimentazione	Power	12V	230V
Larghezza lavoro (mm)	Total cleaning (mm)	350	350
Diametro spazzola (mm)	Brush diameter (mm)	350	350
Pressione Spazzola (Kg)	Brush pressure (Kg)	20	20
Motore aspirazione	Vacuum motor	300W	500W
Motore spazzola	Brush motor	140W	220W
Velocità giri spazzola	Rpm speed brush	140rpm	140rpm
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	2200	2200
Trazione	Traction	Mechanical	Mechanical
Serbatoio soluzione (lt)	Solution tank (lt)	20	20
Serbatoio recupero (lt)	Recovery tank (lt)	20	20
Autonomia di lavoro batt. (h)	Working Autonomy (h)1		1
L x P x H (mm)	L x P x H (mm)	800x400x1000	800x400x1000
Pallet L x P x H (mm)	Pallet L x P x H (mm)	800x1200x1300	800x1200x1300
Peso vuoto	Weight	60Kg	40Kg
Batteria	Battery	SI/YES, Gel 12V - 60Ah	-
Carica batteria	Battery Charger	SI/YES	-
Lunghezza cavo	Power cord length	-	20 mt



## Standard brush

	DESCRIPTION	CODE
1	Polypropilene brush	ZLASP35PP

## Options

	DESCRIPTION	CODE
2	Soft brush	ZLASP35PPM
3	Hard Tynex brush	ZLASP35TY
4	Pad Holder	ZLADT35
5	White Microfibre Disc	ZLADM35W
6	Red Microfibre Disc	ZLADM35R
7	Green Microfibre Disc	ZLADM35G
8	Gel battery 12V - 60Ah	ZBA1260G
9	Electronic charger Lead/Acid - Gel 12V - 5Ah	ZCC125



**W** **Bianco - White**  
Lucidatura  
Polishing

**U** **Gorilla - UHS**  
Lucidatura alta velocità  
High speed burnishing

**R** **Rosso - Red**  
Manutenzione regolare  
Regular maintenance

**B** **Blu - Blue**  
Deceratura Parziale  
Light dewax

**G** **Verde - Green**  
Deceratura parziale / lavaggio medio  
Light dewax / Scrubbing

**BR** **Marrone - Brown**  
Lavaggio profondo / Cotto  
Deep scrubbing / Stones

**BL** **Nero - Black**  
Lavaggio profondo  
Deep scrubbing



# LAVASCIUGA SCRUBBERS ZLA40

Lavasciuga compatta ed agile; studiata per arrivare ovunque, si muove con facilità in spazi ristretti. Nonostante le dimensioni ridotte ha caratteristiche che la rendono assolutamente competitiva e adatta ad un utilizzo professionale.

Scrubbing compact and agile, designed to get wherever: it moves in small space. Despite its small size has features that make it very competitive and suitable for professional use.

Telaio e parti meccaniche in acciaio inox 304  
Led segnalazione guasti e led anomalia batteria  
Segnalatore batterie scariche  
Segnalatore serbatoio recupero pieno  
Elettrovalvola detergente  
Galleggiante serbatoio recupero pieno  
Regolazione pressione spazzola  
Barra aspirante rotativa  
Spazzola a lavare in ppl  
Regolazione in altezza

Steel 304 self carrying chassis  
Mechanical traction  
Signaller brake and anomaly battery  
Battery level indicator  
Signaller discharge battery  
Signaller of full recovery tank  
Electric valve detergent  
Float recovery tank  
Brush pressure regulator  
Polypropylene scrubbing brush  
Height regulator



**STAINLESS  
STEEL  
304**

## ZLA40CBG

Lavapavimenti completa di 2 batterie Gel e carica batteria  
Scrubber with 2 batteries Gel and charger

## ZLA40C

Lavapavimenti a cavo  
Scrubber with power cord

		ZLA40CBG	ZLA40C
Alimentazione	Power	24V	230V
Larghezza lavoro (mm)	Total cleaning (mm)	400	400
Diametro spazzola (mm)	Brush diameter (mm)	400	400
Pressione Spazzola (Kg)	Brush pressure (Kg)	30	30
Motore aspirazione	Vacuum motor	600W	500W
Motore spazzola	Brush motor	200W	450W
Velocità giri spazzola	Rpm speed brush	185rpm	140rpm
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	2200	2200
Trazione	Traction	Mechanical	Mechanical
Serbatoio soluzione (lt)	Solution tank (lt)	35	35
Serbatoio recupero (lt)	Recovery tank (lt)	45	45
Autonomia di lavoro batt. (h)	Working Autonomy (h)	1,5	1,5
L x P x H (mm)	L x P x H (mm)	1100x450x1000	1100x450x1000
Pallet L x P x H (mm)	Pallet L x P x H (mm)	800x1200x1300	800x1200x1300
Peso vuoto	Weight	78Kg	48Kg
Batteria	Battery	Si/YES, 2pcs - Gel 12V - 60Ah	-
Carica batterie	Battery Charger	Si/YES	-
Lunghezza cavo	Power cord length	-	20 mt



## Standard brush

	DESCRIPTION	CODE
1	Polypropilene brush	ZLASP40PP

## Options

	DESCRIPTION	CODE
2	Soft brush	ZLASP40PPM
3	Hard Tynex brush	ZLASP40TY
4	Pad Holder	ZLADT40
5	White Microfibre Disc	ZLADM40W
6	Red Microfibre Disc	ZLADM40R
7	Green Microfibre Disc	ZLADM40G
8	Gel battery 12V - 60Ah (1pc)	ZBA1260G
9	Electronic charger Lead/Acid - Gel 24V - 10Ah	ZCC2410



**W** Bianco - White  
Lucidatura  
Polishing

**U** Gorilla - UHS  
Lucidatura alta velocità  
High speed burnishing

**R** Rosso - Red  
Manutenzione regolare  
Regular maintenance

**B** Blu - Blue  
Deceratura Parziale  
Light dewax

**G** Verde - Green  
Deceratura parziale / lavaggio medio  
Light dewax / Scrubbing

**BR** Marrone - Brown  
Lavaggio profondo / Cotto  
Deep scrubbing / Stones

**BL** Nero - Black  
Lavaggio profondo  
Deep scrubbing



# LAVASCIUGA SCRUBBERS SINGLE BRUSH

Lavasciuga costruite sulla base di una tecnologia avanzata sono facili da usare e di semplice manutenzione. Potenza, versatilità, maneggevolezza e semplicità d'uso sono i punti di forza di queste macchine.

Scrubber constructed on the basis of advanced technology, are easy to use and simple to maintenance. Power, versatily, manageability and use are the strengths of these machines.

Telaio autoportante in acciaio inox 304  
Trazione meccanica  
Led segnalazione guasti e led anomalia batteria  
Segnalatore batterie scariche  
Filtro protezione motore aspirazione  
Filtro serbatoio acqua pulita  
Elettrovalvola detergente  
Livello detergente  
Galleggiante di fermo serbatoio recupero  
Regolazione pressione spazzola  
Barra aspirante in 304 con lame in poliuretano  
Cassetto portaoggetti

Steel 304 chassis and mechanical part  
Signaller brake and anomaly battery  
Signaller discharge battery  
Filter air motor  
Clean water filter tank  
Electric valve detergent  
Detergent level  
Float detention solution recovery tank  
Brush pressure regular  
Suction bar inox 304 with polyurethane blades  
Glove compartment



## ZLA46T

Lavapavimenti trazionata avanti/indietro  
Scrubber traction forward/backward

## ZLA52T

Lavapavimenti trazionata avanti/indietro  
Scrubber traction forward/backward

## ZLA56T

Lavapavimenti trazionata avanti/indietro  
Scrubber traction forward/backward

		ZLA46T	ZLA52TZ	LA56T
Alimentazione	Power	24V	24V	24V
Larghezza lavoro (mm)	Total cleaning (mm)	4605	20	560
Larghezza squeegee (mm)	Squeegee width (mm)	700	7008	50
Diametro spazzola (mm)	Brush diameter (mm)	4605	20	560
Pressione Spazzola (Kg)	Brush pressure (Kg)	33	35	38
Motore aspirazione	Vacuum motor	600W	600W	600W
Motore spazzola	Brush motor	200W2	00W	200W
Velocità giri spazzola	Rpm speed brush	185rpm1	85rpm	185rpm
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	2900	35003	800
Trazione	Traction	ElectronicE	lectronicE	lectronic
Serbatoio soluzione (lt)	Solution tank (lt)	1001	00	100
Serbatoio recupero (lt)	Recovery tank (lt)	60	60	60
Autonomia di lavoro batt. (h)	Working Autonomy (h)	2,5	2,5	2,5
L x P x H (mm)	L x P x H (mm)	1310x520x1100	1310x520x1100	1310x520x1100
Pallet L x P x H (mm)	Pallet L x P x H (mm)	1400x800x1400	1400x800x1400	1400x800x1400
Batteria	Battery	NO/NO	NO/NO	NO/NO
Carica batterie	Battery Charger	SÌ/YES	SÌ/YES	SÌ/YES





## Standard brush

	DESCRIPTION	CODE
1	Polypropilene brush	ZLASPXXPP

## Options

	DESCRIPTION	CODE
2	Soft brush	ZLASPXXPPM
3	Hard Tynex brush	ZLASPXXTY
4	Pad Holder	ZLADTXX
5	White Microfibre Disc	ZLADMXXW
6	Red Microfibre Disc	ZLADMXXR
7	Green Microfibre Disc	ZLADMXXG
8	AGM battery 12V - 110Ah (1pc) *	ZBA12110AGM
9	Electronic charger Lead/Acid - Gel 24V - 10Ah	ZCC2410E

\* La lavasciuga necessita di 2 batterie.  
The Scubber needs 2 batteries.



**W** Bianco - White  
Lucidatura  
Polishing

**U** Gorilla - UHS  
Lucidatura alta velocità  
High speed burnishing

**R** Rosso - Red  
Manutenzione regolare  
Regular maintenance

**B** Blu - Blue  
Deceratura Parziale  
Light dewax

**G** Verde - Green  
Deceratura parziale / lavaggio medio  
Light dewax / Scrubbing

**BR** Marrone - Brown  
Lavaggio profondo / Cotto  
Deep scrubbing / Stones

**BL** Nero - Black  
Lavaggio profondo  
Deep scrubbing



# LAVASCIUGA SCRUBBERS

Lavasciuga costruite sulla base di una tecnologia avanzata sono facili da usare e di semplice manutenzione. Potenza, versatilità, maneggevolezza e semplicità d'uso sono i punti di forza di queste macchine.

# DOUBLE BRUSH

Scrubber constructed on the basis of advanced technology, are easy to use and simple to maintenance. Power, versatility, manageability and use are the strengths of these machines.

Telaio autoportante  
in acciaio inox 304  
Trazione meccanica  
Led segnalazione guasti e  
led anomalia batteria  
Segnalatore batterie scariche  
Filtro protezione motore  
aspirazione  
Filtro serbatoio acqua pulita  
Elettrovalvola detergente  
Livello detergente  
Galleggiante di fermo  
serbatoio recupero  
Regolazione pressione  
spazzola  
Barra aspirante ino 304  
con lame in poliuretano  
Cassetto portaoggetti

Steel 304 chassis and  
mechanical part  
Signaller brake and anomaly  
battery  
Filter air motor  
Clean water filter tank  
Electric valve detergent  
Detergent level  
Float detention solution  
recovery tank  
Brush pressure regular  
Suction bar inox 304 with  
polyurethane blades  
Glove compartment



## DOPPIA SPAZZOLA DOUBLE BRUSH

### ZLA66T

Lavapavimenti trazione avanti/  
indietro con doppia spazzola  
Scrubber traction forward/  
backward with two brush

### ZLA80T

Lavapavimenti trazione avanti/  
indietro con doppia spazzola  
Scrubber traction forward/  
backward with two brush

		ZLA66T	ZLA80T
Alimentazione	Power	24V	24V
Larghezza lavoro (mm)	Total cleaning (mm)	660	800
Larghezza squeegee (mm)	Squeegee width (mm)	850	850
Diametro spazzola (mm)	Brush diameter (mm)	330 x 2	380 x 2
Pressione Spazzola (Kg)	Brush pressure (Kg)	40	40
Motore aspirazione	Vacuum motor	600W6	00W
Motore spazzola	Brush motor	200W x 2	200W x 2
Velocità giri spazzola	Rpm speed brush	190rpm	190rpm
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	41005	000
Trazione	Traction	ElectronicE	Electronic
Serbatoio soluzione (lt)	Solution tank (lt)	100	100
Serbatoio recupero (lt)	Recovery tank (lt)	90	90
Autonomia di lavoro batt. (h)	Working Autonomy (h)	2,5	2,5
L x P x H (mm)	L x P x H (mm)	1400x850x1100	1400x850x1100
Pallet L x P x H (mm)	Pallet L x P x H (mm)	1500x900x1400	1500x900x1400
Batteria	Battery	NO/NO	NO/NO
Carica batterie	Battery Charger	SÌ/YES	SÌ/YES



## Standard brush

DESCRIPTION	CODE
1 Polypropilene brush	ZLASPXXPP

## Options

DESCRIPTION	CODE
2 Soft brush	ZLASPXXPPM
3 Hard Tynex brush	ZLASPXXTY
4 Pad Holder	ZLADTXX
5 White Microfibre Disc	ZLADMXXW
6 Red Microfibre Disc	ZLADMXXR
7 Green Microfibre Disc	ZLADMXXG
8 AGM battery 12V - 110Ah (1pc) *	ZBA12110AGM
9 Charge electronic Lead/Acid - Gel 24V - 10Ah	ZCC2410E

\* La lavasciuga necessita di 2 batterie.  
The Scubber needs 2 batteries.



**W** Bianco - White  
Lucidatura  
Polishing

**U** Gorilla - UHS  
Lucidatura alta velocità  
High speed burnishing

**R** Rosso - Red  
Manutenzione regolare  
Regular maintenance

**B** Blu - Blue  
Deceratura Parziale  
Light dewax

**G** Verde - Green  
Deceratura parziale / lavaggio medio  
Light dewax / Scrubbing

**BR** Marrone - Brown  
Lavaggio profondo / Cotto  
Deep scrubbing / Stones


**BL** Nero - Black  
Lavaggio profondo  
Deep scrubbing



# LAUB 900

Macchina Lavapavimenti uomo a bordo in tre misure di pista di lavaggio 650 mm, adatta per l'utilizzo in aree di medie e grandi dimensioni. Il serbatoio soluzione di 145 litri ha un volume superiore del 30% rispetto alle macchine di pari ingombro già presenti sul mercato. Robusta, facile da usare, dotata di elevata manovrabilità, studiata nei minimi dettagli per garantire la migliore efficienza della prestazione di pulizia.

The ride-on scrubber machine with wash track sizes, 650 mm, is suitable for use in medium and large areas. The 145-liter solution tank has 30% more capacity than similarsized machines already on the market. It is sturdy, easy to use, highly manageable, designed down to the smallest details to ensure the best efficiency of cleaning performance.



		LAUB900	LAUB900C	LAUB900CB	LAUB900CLI <span style="background-color: #28a745; color: white; padding: 2px;">LiFePo4</span>
Alimentazione	Power	24V	24V	24V	25,6V
Larghezza lavoro (mm)	Total cleaning (mm)	650	650	650	650
Larghezza aspirazione (mm)	Vacuum width (mm)	900	900	900	900
Diametro spazzola (mm)	Brush diameter (mm)	2 x 300	2 x 300	2 x 300	2 x 300
Pressione Spazzola (Kg)	Brush pressure (Kg)	22-48	22-48	22-48	22-48
Motore aspirazione (W)	Vacuum motor (W)	500	500	500	500
Motore spazzola (Nr/W)	Brush motor (Nr/W)	2x 400W	2x 400W	2x 400W	2x 400W
Velocità giri spazzola (rpm)	Rpm speed brush (rpm)	130	130	130	130
Pressione specifica (gr/cm <sup>2</sup> )	Brush pressure (gr/cm <sup>2</sup> )	from 22 to 48			
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	4050	4050	4050	4050
Trazione (W/Nr)	Traction (W/Nr)	1 x 600	1 x 600	1 x 600	1 x 600
Serbatoio soluzione (lt)	Solution tank (lt)	145	145	145	145
Serbatoio recupero (lt)	Recovery tank (lt)	160	160	160	160
Pendenza max. a pieno carico (%)	Maxincline at full charge (%)	8	8	8	8
L x P x H (mm)	L x P x H (mm)	1470 x 695 x 1345			
Peso vuoto	Weight	260Kg	260Kg	260Kg	260Kg
Batteria Pb/acido	Battery Lead/acid	24V /220Ah (NO)	24V /220Ah (SI)	24V /220Ah (NO)	25,6V /160Ah LITHIUM (SI)
Carica batteria (24V-25Ah)	Battery Charger (24V-25Ah)	NO	SI	SI	SI



## Standard Accessories

	DESCRIPTION	CODE
1	Polypropilene brush PP 0,6mm	CPSP1314

## Options


	DESCRIPTION	CODE
2	Soft brush PP 0,3mm	CPSP131403
3	Medium brush PP 0,9mm	CPSP131409
4	Hard brush	CPSP131412
5	Pad holder	CPPA1314
6	Red microfiber disc	CPDM013R
7	Brown microfiber disc	CPDM013M
8	White microfiber disc	CPDM013W
9	Fludeed battery 6V 205Ah(C5) KIT*4 pcs	ZBA6210P4 (standard for LAUB900C)
10	Battery recharge 24V 25A	ZCC2425SC
11	Gel Battery 6V - 180Ah (C5)	ZBA6180G (standard for LAUB900C-LAUB900CB)
12	Lithium Battery pack 25,6V - 160Ah	ZBA25160LI (only for LAUB900CLI)
13	CDS Electronic detergent control	LAKD001
14	Automatic water charger system LAUB	LAKIT001



# LAUB 1000

Macchina Lavapavimenti uomo a bordo in tre misure di pista di lavaggio 750 mm, adatta per l'utilizzo in aree di medie e grandi dimensioni. Il serbatoio soluzione di 145 litri ha un volume superiore del 30% rispetto alle macchine di pari ingombro già presenti sul mercato. Robusta, facile da usare, dotata di elevata manovrabilità, studiata nei minimi dettagli per garantire la migliore efficienza della prestazione di pulizia.

The ride-on scrubber machine with wash track sizes, 750 mm, is suitable for use in medium and large areas. The 145-liter solution tank has 30% more capacity than similarsized machines already on the market. It is sturdy, easy to use, highly manageable, designed down to the smallest details to ensure the best efficiency of cleaning performance.



		LAUB1000	LAUB1000C	LAUB1000CB	LAUB1000CLI <b>LiFePo4</b>
Alimentazione	Power	24V	24V	24V	25,6V
Larghezza lavoro (mm)	Total cleaning (mm)	750	750	750	750
Larghezza aspirazione (mm)	Vacuum width (mm)	1000	1000	1000	1000
Diametro spazzola (mm)	Brush diameter (mm)	2 x 405	2 x 405	2 x 405	2 x 405
Pressione Spazzola (Kg)	Brush pressure (Kg)	22-48	22-48	22-48	22-48
Motore aspirazione (W)	Vacuum motor (W)	500	500	500	500
Motore spazzola (Nr/W)	Brush motor (Nr/W)	2x 400W	2x 400W	2x 400W	2x 400W
Velocità giri spazzola (rpm)	Rpm speed brush (rpm)	130	130	130	130
Pressione specifica (gr/cm <sup>2</sup> )	Brush pressure (gr/cm <sup>2</sup> )	from 22 to 48			
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	4700	4700	4700	4700
Trazione (W/Nr)	Traction (W/Nr)	1 x 600	1 x 600	1 x 600	1 x 600
Serbatoio soluzione (lt)	Solution tank (lt)	145	145	145	145
Serbatoio recupero (lt)	Recovery tank (lt)	160	160	160	160
Pendenza max. a pieno carico (%)	Max incline at full charge (%)	8	8	8	8
L x P x H (mm)	L x P x H (mm)	1470 x 810 x 1345			
Peso vuoto	Weight	265Kg	265Kg	265Kg	265Kg
Batteria Pb/acido	Battery Lead/acid	24V /220Ah (NO)	24V /220Ah (SI)	24V /220Ah (NO)	25,6V /160Ah LITHIUM (SI)
Carica batteria (24V-25Ah)	Battery Charger (24V-25Ah)	NO	SI	SI	SI



## Standard Accessories

	DESCRIPTION	CODE
1	Polypropilene brush PP 0,6mm	CPSP1516

## Options


	DESCRIPTION	CODE
2	Soft brush PP 0,3mm	CPSP151603
3	Medium brush PP 0,9mm	CPSP151609
4	Hard brush	CPSP151612
5	Pad holder	CPPA1516
6	Red microfiber disc	CPDM015R
7	Brown microfiber disc	CPDM015M
8	White microfiber disc	CPDM015W
9	Fludeed battery 6V 205Ah(C5) KIT*4 pcs	ZBA6210P4 (standard for LAUB1000C)
10	Battery recharge 24V 25A	ZCC2425SC (standard for LAUB1000C-LAUB1000CB)
11	Gel Battery 6V - 180Ah (C5)	ZBA6180G
12	Lithium Battery pack 25,6V - 160Ah	ZBA25160LI (only for LAUB1000CLI)
13	CDS Electronic detergent control	LAKD001
14	Automatic water charger system LAUB	LAKIT001



# LAUB 1100

Macchina Lavapavimenti uomo a bordo in tre misure di pista di lavaggio 850 mm, adatta per l'utilizzo in aree di medie e grandi dimensioni. Il serbatoio soluzione di 145 litri ha un volume superiore del 30% rispetto alle macchine di pari ingombro già presenti sul mercato. Robusta, facile da usare, dotata di elevata manovrabilità, studiata nei minimi dettagli per garantire la migliore efficienza della prestazione di pulizia.

The ride-on scrubber machine with wash track sizes, 850 mm, is suitable for use in medium and large areas. The 145-liter solution tank has 30% more capacity than similar sized machines already on the market. It is sturdy, easy to use, highly manageable, designed down to the smallest details to ensure the best efficiency of cleaning performance.



		LAUB1100	LAUB1100C	LAUB1100CB	LAUB1100CLI <span style="background-color: #28a745; color: white; padding: 2px;">LiFePo4</span>
Alimentazione	Power	24V	24V	24V	25,6V
Larghezza lavoro (mm)	Total cleaning (mm)	850	850	850	850
Larghezza aspirazione (mm)	Vacuum width (mm)	1100	1100	1100	1100
Diametro spazzola (mm)	Brush diameter (mm)	2 x 430	2 x 430	2 x 430	2 x 430
Pressione Spazzola (Kg)	Brush pressure (Kg)	22-48	22-48	22-48	22-48
Motore aspirazione (W)	Vacuum motor (W)	500	500	500	500
Motore spazzola (Nr/W)	Brush motor (Nr/W)	2x 400W	2x 400W	2x 400W	2x 400W
Velocità giri spazzola (rpm)	Rpm speed brush (rpm)	130	130	130	130
Pressione specifica (gr/cm <sup>2</sup> )	Brush pressure (gr/cm <sup>2</sup> )	from 22 to 48			
Rendimento orario (m <sup>2</sup> /h)	Cleaning capacity (m <sup>2</sup> /h)	5000	5000	5000	5000
Trazione (W/Nr)	Traction (W/Nr)	1 x 600	1 x 600	1 x 600	1 x 600
Serbatoio soluzione (lt)	Solution tank (lt)	145	145	145	145
Serbatoio recupero (lt)	Recovery tank (lt)	160	160	160	160
Pendenza max. a pieno carico (%)	Max incline at full charge (%)	8	8	8	8
L x P x H (mm)	L x P x H (mm)	1470 x 810 x 1345			
Peso vuoto	Weight	270Kg	270Kg	270Kg	270Kg
Batteria Pb/acido	Battery Lead/acid	24V /220Ah (NO)	24V /220Ah (SI)	24V /220Ah (NO)	25,6V /160Ah LITHIUM (SI)
Carica batteria (24V-25Ah)	Battery Charger (24V-25Ah)	NO	SI	SI	SI



## Standard Accessories

	DESCRIPTION	CODE
1	Polypropilene brush PP 0,6mm	CPSP1617

## Options

	DESCRIPTION	CODE
2	Soft brush PP 0,3mm	CPSP161703
3	Medium brush PP 0,9mm	CPSP161709
4	Hard brush	CPSP161712
5	Pad holder	CPPA1617
6	Red microfiber disc	CPDM016R
7	Brown microfiber disc	CPDM016M
8	White microfiber disc	CPDM016W
9	Fludeed battery 6V 205Ah(C5) KIT*4 pcs	ZBA6210P4 (standard for LAUB1100C)
10	Battery recharge 24V 25A	ZCC2425SC (standard for LAUB1100C-LAUB1100CB)
11	Gel Battery 6V - 180Ah (C5)	ZBA6180G
12	Lithium Battery pack 25,6V - 160Ah	ZBA25160LI (only for LAUB1100CLI)
13	CDS Electronic detergent control	LAKD001
14	Automatic water charger system LAUB	LAKIT001







**ELSEA**  
MADE IN ITALY

